

a

12-Bit, 105/125 MSPS IF Sampling A/D Converter

Preliminary Technical Data

AD9433

FEATURES

IF Sampling up to 400MHz
1vp-p or 2Vp-p Analog input range option
On Chip Clock Duty Cycle Stabilization
On-chip reference and track/hold
SFDR Optimization circuit
Excellent Linearity:
 - DNL = +/- 0.25 lsb (typ)
 - INL = +/- 0.5 lsb (typ)
750 MHz Full Power Analog Bandwidth
SNR = 67dB @ Fin up to Nyquist
SFDR = 85dBc @ Fin up to 125 MHz
SFDR = 80dBc @ Fin up to 250 MHz
THD = 90dBc @ Fin up to 250 MHz
Power dissipation = 1.3W typical at 125MSPs
Input voltage of 1Vp-p or 2Vp-p
Two's complement or Offset binary data format
+5.0V Analog Supply Operation
+2.5V to 3.3V TTL/CMOS outputs.


APPLICATIONS

Wireless and Wired Broadband Communications
 - Wideband carrier frequency systems
Communications Test Equipment
"IF Sampling" schemes
Radar and Satellite sub-systems

GENERAL INTRODUCTION

The AD9433 is a 12-bit monolithic sampling analog-to-digital converter with an on-chip track-and-hold circuit and is designed for ease of use. The product operates up to 125 Msp/s conversion rate and is optimized for outstanding dynamic performance in wideband and high IF carrier systems.

The ADC requires a +5V analog power supply and a differential encode clock for full performance operation. No external reference or driver components are required for many applications. The digital outputs are TTL/CMOS compatible and a separate output power supply pin supports interfacing with 3.3V or 2.5V logic.

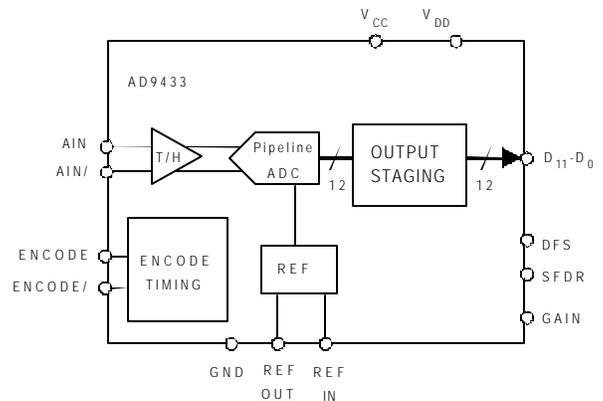

AD9433 FUNCTIONAL BLOCK DIAGRAM

A user selectable on-chip circuit optimizes SFDR performance of 90dBc from DC to 70MHz. A user select pin defines a 1V_{p-p} or 2V_{p-p} analog input voltage range. The encode clock supports either differential or single-ended input and is PECL compatible and an output data format select option of two's complement or offset binary are also supported.

Fabricated on an advanced BiCMOS process, the AD9433 is available in a 52 pin surface mount plastic package (52 LQFP) specified over the industrial temperature range (-40°C to +85°C) and is pin compatible with the AD9432.

PRELIMINARY TECHNICAL DATA

AD9433

DC SPECIFICATIONS (V_{DD} = 3.3 V, V_{CC} = 5.0 V; external reference; differential encode input, unless otherwise noted)

Parameter	Temp	Test Level	AD9433-105			AD9433-125			Unit
			Min	Typ	Max	Min	Typ	Max	
RESOLUTION			12			12			Bits
ACCURACY			Guaranteed			Guaranteed			
No Missing Codes	Full	VI							
Offset Error	Full	VI	-5	0	+5	-5	0	+5	mV
Gain Error ¹	25°C	I	±1			±1			% FS
Differential Nonlinearity (DNL)	25°C	I	-0.6	±0.25	+0.6	-0.6	±0.3	+0.6	LSB
	Full	VI							
Integral Nonlinearity (INL)	25°C	I	±0.5			±0.5			LSB
	Full	VI							
TEMPERATURE DRIFT									
Offset Error	Full	V							ppm/°C
Gain Error ¹	Full	V	150			150			ppm/°C
Reference	Full	V	50			50			ppm/°C
REFERENCE									
Internal Reference Voltage (VREFOUT)	25°C	I	2.4	2.5	2.6	2.4	2.5	2.6	V
Output Current (VREFOUT)	Full	V							uA
Input Current (VREFIN)	Full	V							uA
Input Resistance (VREFIN)	Full	V							kΩ
ANALOG INPUTS									
Differential Input Voltage Range (A _{IN} , A _{IN})									
GAIN=0	Full	V	2.0			2.0			V
GAIN=1	Full	V	1.0			1.0			V
Common Mode Voltage	Full	V	4.0			4.0			V
Input Resistance	Full	V	2	3	4	3			kΩ
Input Capacitance	Full	V	3			3			pF
Analog Bandwidth, Full Power	Full	V	750			750			MHz
POWER SUPPLY									
V _{CC}	Full	IV	4.75	5.0	5.25	4.75	5.0	5.25	V
V _{DD}	Full	IV	2.7		3.3	2.7		3.3	V
Power Dissipation ²	Full	VI	1250			1350			mW
Power Supply Rejection Ratio (PSRR)	25°C	I	±5						mV/V
I _{VCC} ³	Full	VI	250			270			mA
I _{VDD} ³	Full	VI	12.5			16			mA
DIGITAL INPUTS									
Encode Input Common Mode	Full	V	3.75			3.75			V
Differential Input (ENC – $\overline{\text{ENC}}$)	Full	V	500			500			mV
Input Voltage Range	Full	IV	-0.5			-0.5			V
Input Resistance	Full	VI	6			6			kΩ
Input Capacitance	25°C	V	3			3			pF
DIGITAL OUPUTS									
Logic "1" Voltage	Full	VI	V _{DD} -0.05			V _{DD} -0.05			V
Logic "0" Voltage	Full	VI	0.05			0.05			V
Output Coding	Twos Compliment or Offset Binary								

NOTES

1 Gain error and gain temperature coefficients are based on the ADC only (with a fixed 2.5 V external reference and a 2 V p-p differential analog input).

2 Power dissipation measured with rated encode and a dc analog input (Outputs Static, I_{VDD} = 0.). I_{VCC} and I_{VDD} measured with 10.3MHz analog input @ 0.5dBFS.

Typical θ_{JA} for LQFP package = 50C/W.

AC SPECIFICATIONS ($V_{DD} = 3.3\text{ V}$, $V_{CC} = 5.0\text{ V}$; internal reference; differential encode input, unless otherwise noted)

Parameter	Temp	Test Level	AD9433-105			AD9433-125			Units
			Min	Typ	Max	Min	Typ	Max	
DYNAMIC PERFORMANCE¹									
Signal to Noise Ratio (SNR) (Without Harmonics)									
$f_{IN}=10.3\text{MHz}$	25°C	I		68.0			67.5		dB
$f_{IN}=49\text{MHz}$	25°C	I		66.8			65.0		dB
$f_{IN}=70\text{MHz}$	25°C	I		67.0			64.5		dB
$f_{IN}=150\text{MHz}$	25°C	V		65.5			62.0		dB
$f_{IN}=250\text{MHz}$	25°C	V		63.5			60.0		dB
Signal to Noise Ratio (SINAD) (With Harmonics)									
$f_{IN}=10.3\text{MHz}$	25°C	I		67.8			67.2		dB
$f_{IN}=49\text{MHz}$	25°C	I		67.2			65.4		dB
$f_{IN}=70\text{MHz}$	25°C	I		66.5			63.6		dB
$f_{IN}=150\text{MHz}$	25°C	V		65.0			60.0		dB
$f_{IN}=250\text{MHz}$	25°C	V		63.0			57.0		dB
Effective Number of Bits									
$f_{IN}=10.3\text{MHz}$	25°C	I		11.0			10.4		Bits
$f_{IN}=49\text{MHz}$	25°C	I		11.0			10.4		Bits
$f_{IN}=70\text{MHz}$	25°C	I		10.8			10.2		Bits
$f_{IN}=150\text{MHz}$	25°C	V		10.6			9.8		Bits
$f_{IN}=250\text{MHz}$	25°C	V		10.2			9.5		Bits
2 nd & 3 rd Harmonic Distortion(SNR)									
$f_{IN}=10.3\text{MHz}$	25°C	I		85			83		dBc
$f_{IN}=49\text{MHz}$	25°C	I		85			80		dBc
$f_{IN}=70\text{MHz}$	25°C	I		80			80		dBc
$f_{IN}=150\text{MHz}$	25°C	V		80			80		dBc
$f_{IN}=250\text{MHz}$	25°C	V		75			75		dBc
Worst other Harmonic or Spur (Excluding 2 nd & 3 rd)									
$f_{IN}=10.3\text{MHz}$	25°C	I		90			90		dBFS
$f_{IN}=49\text{MHz}$	25°C	I		90			85		dBFS
$f_{IN}=70\text{MHz}$	25°C	I		90			85		dBFS
$f_{IN}=150\text{MHz}$	25°C	V		90			83		dBFS
$f_{IN}=250\text{MHz}$	25°C	V		90			80		dBFS
Two Tone Intermod Distortion (IMD)									
$f_{IN1}=29.3\text{MHz}$, $f_{IN2}=30.3\text{MHz}$	25°C	V							dBc
$f_{IN1}=150\text{MHz}$, $f_{IN2}=151\text{MHz}$	25°C	V							dBc
$f_{IN1}=250\text{MHz}$, $f_{IN2}=251\text{MHz}$	25°C	V							dBc

NOTES

1 SNR/harmonics based on an analog input voltage of -0.5 dBFS referenced to a 2 V full-scale input range.

Specifications subject to change without notice.

PRELIMINARY TECHNICAL DATA

AD9433

SWITCHING SPECIFICATIONS ($V_{DD} = 3.3\text{ V}$, $V_{CC} = 5.0\text{ V}$; ; differential encode input, unless otherwise noted)

Parameter	Temp	Test Level	AD9433-105			AD9433-125			Unit
			Min	Typ	Max	Min	Typ	Max	
Encode Rate	Full	VI	1		105	1		125	Msps
Encode Pulse Width High (t_{EH})	Full	VI	2.9		6.7	2.4		5.6	ns
Encode Pulse Width Low (t_{EL})	Full	VI	2.9		6.7	2.4		5.6	ns
Aperture Delay (t_A)	25°C	V							ns
Aperture Uncertainty (Jitter)	25°C	V		0.25			0.25		ps rms
Output Valid Time (t_V) ²	Full	VI		4.0			4.0		ns
Output Propagation Delay (t_{PD}) ¹	Full	VI		4.0			4.0		ns
Output Rise Time (t_R)	Full	V		2.1			2.1		ns
Output Fall Time (t_F)	Full	V		1.9			1.9		ns
Out of Range Recovery Time	25°C	V		2			2		ns
Transient Response Time	25°C	V		2			2		ns
Latency	Full	IV		10			10		Cycles

NOTES

¹ t_V and t_{PD} are measured from the transition points of the ENCODE input to the 50%/50% levels of the digital outputs swing. The digital output load during test is not to exceed an ac load of 10 pF or a dc current of $\pm 40\ \mu\text{A}$. Rise and fall times measured from 10% to 90%.

ABSOLUTE MAXIMUM RATINGS¹

Parameter	Min	Max	Units
ELECTRICAL			
V_{DD} Voltage	-0.5	6.0	V
V_{CC} Voltage	-0.5	6.0	V
Analog Input Voltage	-0.5	$V_{CC}+0.5$	V
Analog Input Current		TBD	mA
Digital Input Voltage	TBD	$V_{CC}+0.5$	V
Digital Output Current		20	mA
ENVIRONMENTAL²			
Operating Temperature Range (Ambient)	-55	125	°C
Maximum Junction Temperature		175	°C
Lead Temperature (Soldering, 10 sec)		TBD	°C
Maximum Case Temperature		150	°C
Storage Temperature Range (Ambient)	-65	150	°C

*Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions outside of those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum ratings for extended periods may affect device reliability.

EXPLANATION OF TEST LEVELS

Test Level

- I 100% production tested.
- II 100% production tested at +25°C and guaranteed by design and characterization at specified temperatures.
- III Sample Tested Only
- IV Parameter is guaranteed by design and characterization testing.
- V Parameter is a typical value only.
- VI 100% production tested at +25°C and guaranteed by design and characterization for industrial temperature range.

CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the AD9433 features proprietary protection circuitry, permanent damage may occur on devices subjected to high-energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option
AD9433BST-105	-40°C to +85°C (Ambient)	52-Lead Plastic Quad Flatpack	ST-52
AD9433BST-125	-40°C to +85°C (Ambient)	52-Lead Plastic Quad Flatpack	ST-52
AD9433/PCB	+25°C	Evaluation Board with AD9433-125	

PIN FUNCTION DESCRIPTIONS

Pin No.	Name	Function
1,3,4,9,11,33,34,35,38,40,43,48,51	GND	Analog Ground
2,5,6,10,36,37,44,47,52	Vcc	Analog Supply (+5V)
7	ENCODE	Encode Clock for ADC – Complementary
8	ENCODE	Encode Clock for ADC – True - (ADC samples on rising edge of ENCODE)
14	OR	Out of Range Output.
15-20, 25-30	D11-0	Digital Output
13,22,23,32	Vdd	Digital Output Power Supply (+3V)
12,21,24,31	DGND	Digital Output Ground
39	GAIN	CMOS gain mode select. GAIN=0 (or ground) for a $2V_{p-p}$ analog input range. GAIN=1 (or V_{CC}) for a differential analog input range of $1V_{p-p}$.
41	DFS	Data format select. Low = Two's compliment, High = Binary
42	SFDR MODE	CMOS control pin that enables (SFDR MODE=1) a proprietary circuit that may improve the spurious free dynamic range (SFDR) performance of the AD9433. It is useful in applications where the dynamic range of the system is limited by discrete spurious frequency content caused by non-linearities in the ADC transfer function. SFDR MODE=0 for normal operation.
45	VREFIN	Reference input for ADC (2.5V typical)
46	VREFOUT	Internal reference output (2.5V typical); bypass with 0.1uF to Ground.
49	AIN	Analog input – True
50	AIN	Analog input – Complement

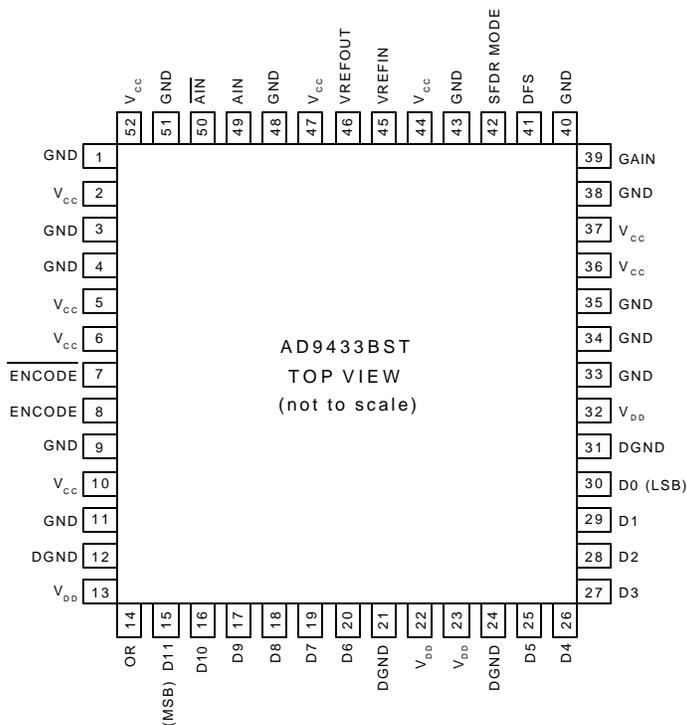

PIN CONFIGURATION

DEFINITIONS OF SPECIFICATIONS

Analog Bandwidth

The analog input frequency at which the spectral power of the fundamental frequency (as determined by the FFT analysis) is reduced by 3 dB.

Aperture Delay

The delay between the 50% point of the rising edge of the ENCODE command and the instant at which the analog input is sampled.

Aperture Uncertainty (Jitter)

The sample-to-sample variation in aperture delay.

Differential Analog Input Resistance, Differential Analog Input Capacitance and Differential Analog Input Impedance

The real and complex impedances measured at each analog input port. The resistance is measured statically and the capacitance and differential input impedances are measured with a network analyzer.

DEFINITIONS OF SPECIFICATIONS (cont'd)

Differential Analog Input Voltage Range

The peak to peak differential voltage that must be applied to the converter to generate a fullscale response. Peak differential voltage is computed by observing the voltage on a single pin and subtracting the voltage from the other pin, which is 180 degrees out of phase. Peak to peak differential is computed by rotating the inputs phase 180 degrees and taking the peak measurement again. Then the difference is computed between both peak measurements.

Differential Nonlinearity

The deviation of any code width from an ideal 1 LSB step.

Effective Number of Bits

The effective number of bits (ENOB) is calculated from the measured SNR based on the equation:

$$ENOB = \frac{SNR_{MEASURED} - 1.76dB + 20\log\left(\frac{FullScale_Amplitude}{Input_Amplitude}\right)}{6.02}$$

Encode Pulse Width/Duty Cycle

Pulse width high is the minimum amount of time that the ENCODE pulse should be left in logic “1” state to achieve rated performance; pulse width low is the minimum time ENCODE pulse should be left in low state. See timing implications of changing t_{ENCH} in text. At a give clock rate, these specs define an acceptable Encode duty cycle.

Fullscale Input Power

Expressed in dBm. Computed using the following equation:

$$Power_{Fullscale} = 10\log\left(\frac{\frac{V_{Fullscale_{rms}}^2}{Z_{Input}}}{.001}\right)$$

Gain

Gain error is the difference between the measured and ideal full scale input voltage range of the ADC.

Harmonic Distortion, 2nd

The ratio of the rms signal amplitude to the rms value of the second harmonic component, reported in dBc.

Harmonic Distortion, 3rd

The ratio of the rms signal amplitude to the rms value of the third harmonic component, reported in dBc.

Integral Nonlinearity

The deviation of the transfer function from a reference line measured in fractions of 1 LSB using a “best straight line” determined by a least square curve fit.

Minimum Conversion Rate

The encode rate at which the SNR of the lowest analog signal frequency drops by no more than 3 dB below the guaranteed limit.

Maximum Conversion Rate

The maximum encode rate at which parametric testing is performed.

Output Propagation Delay

The delay between a differential crossing of ENCODE and ENCODE and the time when all output data bits are within valid logic levels.

Noise (for any range within the ADC)

$$V_{noise} = \sqrt{Z * .001 * 10^{\left(\frac{FS_{dBm} - SNR_{dBc} - Signal_{dBFS}}{10}\right)}}$$

Where Z is the input impedance, FS is the fullscale of the device for the frequency in question, SNR is the value for the particular input level and Signal is the signal level within the ADC reported in dB below fullscale. This value includes both thermal and quantization noise.

Power Supply Rejection Ratio

The ratio of a change in input offset voltage to a change in power supply voltage.

Signal-to-Noise-and-Distortion (SINAD)

The ratio of the rms signal amplitude (set 1dB below full scale) to the rms value of the sum of all other spectral components , including harmonics but excluding dc.

Signal-to-Noise Ratio (without Harmonics)

The ratio of the rms signal amplitude (set at 1 dB below full scale) to the rms value of the sum of all other spectral components, excluding the first five harmonics and dc.

Spurious-Free Dynamic Range (SFDR)

The ratio of the rms signal amplitude to the rms value of the peak spurious spectral component. The peak spurious component may or may not be a harmonic. May be reported in dBc (i.e. degrades as signal level is lowered), or dBFS (always related back to converter full scale).

Two-Tone Intermodulation Distortion Rejection

The ratio of the rms value of either input tone (f1, f2) to the rms value of the worst third order intermodulation product; reported in dBc. Products are located at 2f1-f2 and 2f2-f1.


Two-Tone SFDR

The ratio of the rms value of either input tone (f1, f2) to the rms value of the peak spurious component. The peak spurious component may or may not be an IMD product. May be reported in dBc (i.e. degrades as signal level is lowered), or in dBFS (always related back to converter full scale).

Worst Other Spur

The ratio of the rms signal amplitude to the rms value of the worst spurious component (excluding the 2nd and 3rd harmonic) reported in dBc.

Timing Diagram

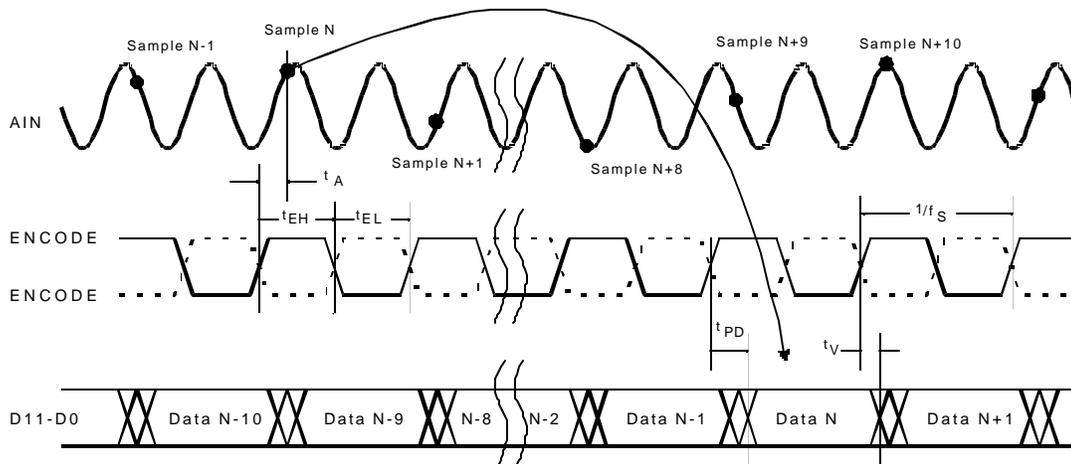

AD9433 Timing Diagram

Equivalent Circuits

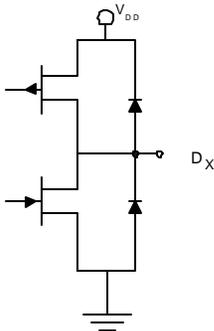


Figure TBD. Digital Output

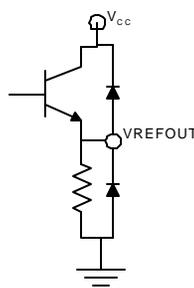


Figure TBD. Reference Output

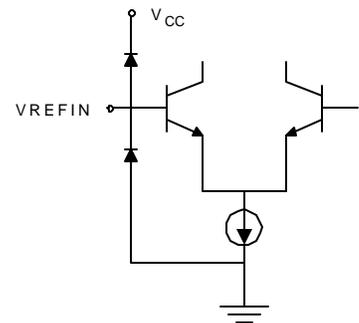


Figure TBD. Reference Input

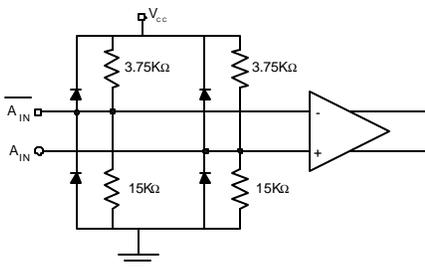


Figure TBD. Analog Input



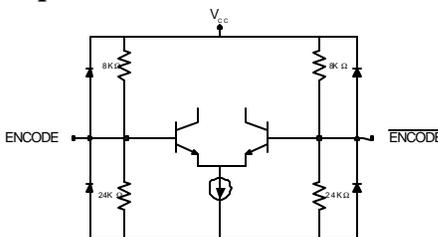


Figure TBD. Encode Inputs


TYPICAL PERFORMANCE CURVES

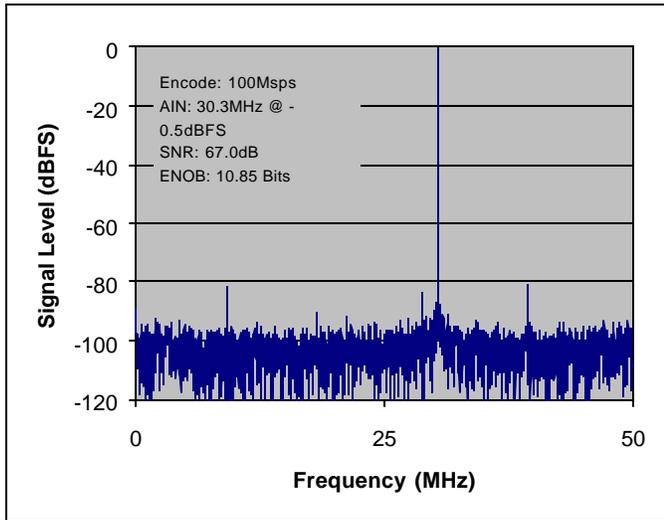


*FFT: 100MSPS, 30.3MHz @ -0.5dBFS,
GAIN=0, SFDR MODE Enabled*

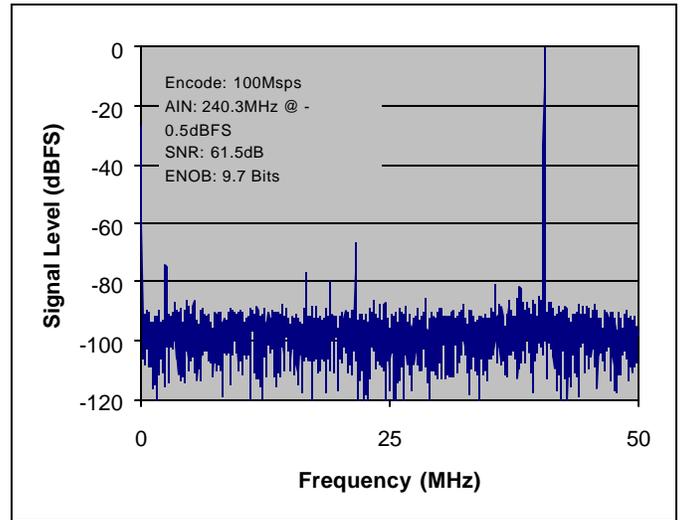

*FFT: 100MSPS, 240.3MHz @ -0.5dBFS,
GAIN=1, SFDR MODE Enabled*

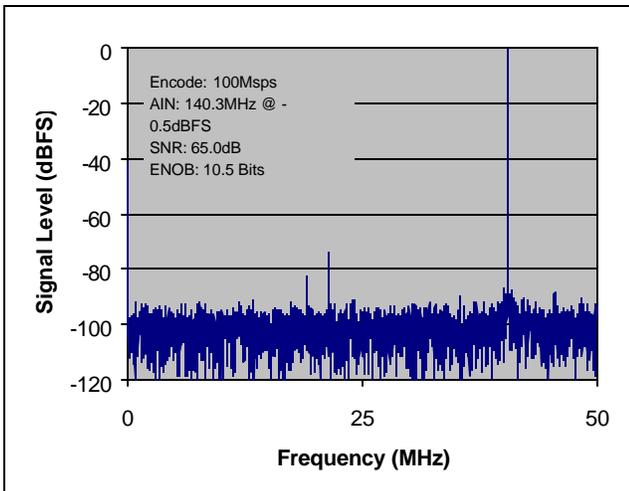

*FFT: 100MSPS, 140.3MHz @ -0.5dBFS,
GAIN=0, SFDR MODE Enabled*

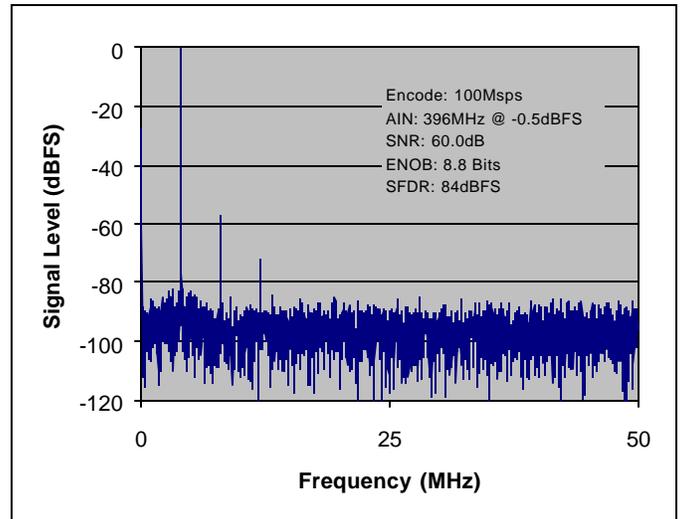

*FFT: 100MSPS, 396MHz @ -0.5dBFS,
GAIN=1, SFDR MODE Enabled*

Theory of Operation

The AD9433 is a multibit pipeline converter that uses a switched capacitor architecture. Optimized for high speed, this converter provides flat dynamic performance up to and beyond the Nyquist limit. DNL transitional errors are calibrated at final test to a typical accuracy of 0.25 LSB or less.

USING THE AD9433

ENCODE Input

Any high speed A/D converter is extremely sensitive to the quality of the sampling clock provided by the user. A track/hold circuit is essentially a mixer, and any noise, distortion, or timing jitter on the clock will be combined with the desired signal at the A/D output. For that reason, considerable care has been taken in the design of the ENCODE input of the AD9433, and the user is advised to give commensurate thought to the clock source.

The AD9433 has an internal clock duty cycle stabilization circuit that locks to the rising edge of ENCODE (falling edge of ENCODE if driven differentially), and optimizes timing internally. This allows for a wide range of input duty cycles at the input without degrading performance. Jitter in the rising edge of the input is still of paramount concern, and is not reduced by the internal stabilization circuit.

The ENCODE and ENCODE inputs are internally biased to 3.75V (nominal), and support either differential or single-ended signals. For best dynamic performance, a differential signal is recommended. Good performance is obtained using an MC10EL16 in the circuit to directly drive the encode inputs, as illustrated in Fig. TBD.

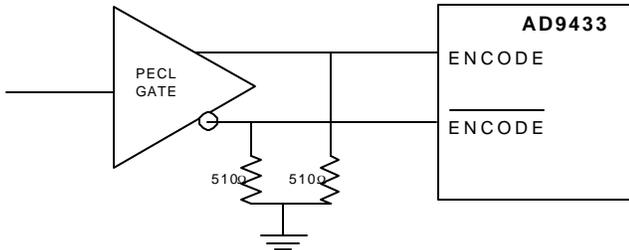


Figure TBD. Using PECL to drive the ENCODE Inputs

Often, the cleanest clock source is a crystal oscillator producing a pure, single ended sine wave. In this configuration, or with any roughly symmetrical, single ended clock source, the signal can be ac-coupled to the ENCODE input. To minimize jitter, the signal amplitude should be maximized within the input range described in Table TBD. The ENCODE input should be bypassed with a capacitor to ground to reduce noise. This ensures that the internal bias voltage is centered on the encode signal. For best dynamic performance, impedances at ENCODE and ENCODE should match.

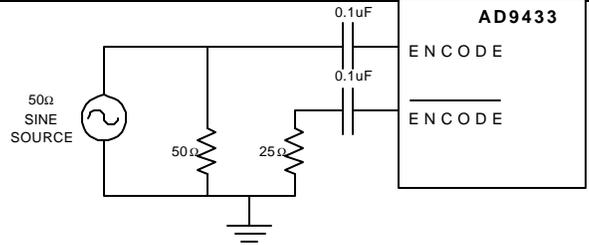


Figure TBD. Single ended 50 Sine Source Encode Circuit

ENCODE Voltage Level Definition

The voltage level definitions for driving ENCODE and ENCODE in single-ended and differential mode are shown in Figure TBD.

ENCODE Inputs

Description	Minimum	Nominal	Maximum
Differential Signal Amplitude (V_{ID})	200mV	750mV	5.5V
Input Voltage Range ($V_{IHD}, V_{ILD}, V_{IHS}, V_{ILS}$)	-0.5V		$V_{CC}+0.5V$
Internal Common Mode Bias (V_{ICM})		3.75 V	
External Common Mode Bias (V_{ECM})	2.5V		4.5V

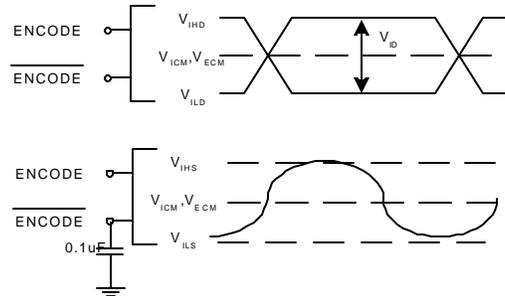


Figure TBD. Differential and Single Ended Input Levels

The analog input to the AD9433 is a differential buffer. The input buffer is self-biased by an on-chip resistor divider that nominally sets the dc common-mode voltage to 4V (see Equivalent Circuits section). Rated performance is achieved by driving the input differentially. Minimum input offset voltage is obtained when driving from a source with a low differential source impedance, such as a transformer, in ac applications (See figure TBD). Capacitive coupling at the inputs will increase the input offset voltage by as much as ± 25 mV.

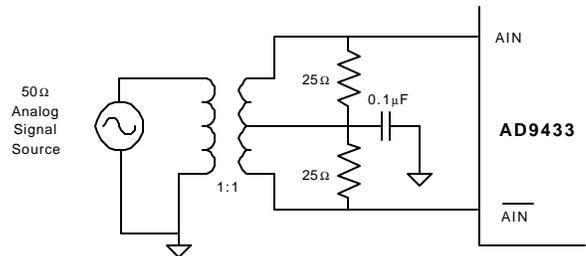


Figure TBD. Transformer-Coupled Analog Input Circuit

In the highest frequency applications, two transformers connected in series may be necessary to minimize even order harmonic distortion. The first transformer will isolate and convert the signal to a differential signal, but the grounded input on the primary side will degrade amplitude balance on the secondary winding. Capacitive coupling between the windings causes this imbalance. Since one input to the first transformer is grounded, there is little or no capacitive coupling, resulting in an amplitude mismatch at the first transformer's output. A second transformer will improve the amplitude balance, and thus improve the harmonic distortion. A wideband transformer, such as the ADT1-1WT from Mini Circuits, is recommended for these applications, as the bandwidth through the two transformers will be reduced by the $\sqrt{2}$.

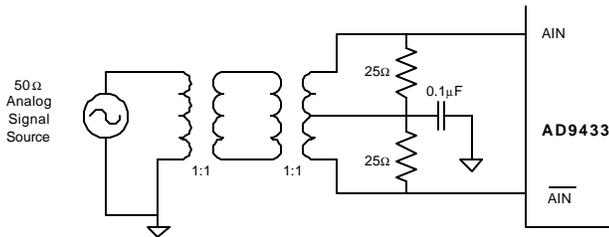


Figure TBD. Driving the Analog Input with 2 transformers for improved even order harmonics

Driving the ADC single-ended will degrade performance, particularly even order harmonics. For best dynamic performance, impedances at AIN and $\overline{\text{AIN}}$ should match. Special care was taken in the design of the analog input section of the AD9433 to prevent damage and corruption of data when the input is overdriven.

GAIN option

The GAIN pin (# 39) is a CMOS control that defines the differential analog input range for the converter to be $2V_{p-p}$ (GAIN=0 or GND) or $1V_{p-p}$ (GAIN=1 or V_{CC}). When the nominal input range is set for $2.0V_{p-p}$, each analog input will be $1V_{p-p}$ when driven differentially. When set for $1.0V_{p-p}$, each analog input will be $0.5V_{p-p}$ when driven differentially.

Dynamic performance of the AD9433 can be optimized for higher frequencies by using the reduced analog input range.

SFDR Optimization

The SFDR MODE pin enables (SFDR MODE=1) a proprietary circuit that may improve the spurious free dynamic range (SFDR) performance of the AD9433. It is useful in applications where the dynamic range of the system is limited by discrete spurious frequency content caused by non-linearities in the ADC transfer function.

Enabling this circuit will give the circuit a dynamic transfer function, meaning that the voltage threshold between two adjacent output codes may change from clock cycle to clock cycle. While improving spurious frequency content, this dynamic aspect of the transfer function may be inappropriate for some time domain applications of the converter. Connecting the SFDR MODE pin to ground will disable this function. The typical performance curves

section of the data sheet illustrates the improvement in the linearity of the converter and it's effect on spurious free dynamic range.

Digital Outputs

The digital outputs are 3V (2.7 V to 3.3 V) TTL/CMOS-compatible for lower power consumption. The output data format is selectable through the data format select (DFS) CMOS input. DFS=1 selects offset binary; DFS=0 selects two's complement coding.

Table TBD. Offset Binary Output Coding (DFS=1, $V_{REF} = +2.5V$)

Code	AIN-AIN (V) Range=2Vp-p	AIN-AIN (V) Range=1Vp-p	Digital Output
4095	1.000	0.500	1111 1111 1111
.	.	.	.
.	.	.	.
2048	0	0	1000 0000 0000
2047	-0.00049	-0.000245	0111 1111 1111
.	.	.	.
.	.	.	.
0	-1.000	-0.5000	0000 0000 0000

Table I. Two's Complement Output Coding (DFS=0, $V_{REF} = +2.5V$)

Code	AIN-AIN (V) Range=2Vp-p	AIN-AIN (V) Range=1Vp-p	Digital Output
+2047	1.000	0.500	0111 1111 1111
.	.	.	.
.	.	.	.
0	0	0	0000 0000 0000
-1	-0.00049	-0.000245	1111 1111 1111
.	.	.	.
.	.	.	.
-2048	-1.000	-0.5000	1000 0000 0000

Voltage Reference

A stable and accurate 2.5 V voltage reference is built into the AD9433 (VREFOUT). In normal operation the internal reference is used by strapping Pin 45 to Pin 46 and placing a 0.1 μF decoupling capacitor at VREFIN. The input range can be adjusted by varying the reference voltage applied to the AD9433. No appreciable degradation in performance occurs when the reference is adjusted $\pm 5\%$. The full-scale range of the ADC tracks reference voltage changes linearly.

Timing

The AD9433 provides latched data outputs, with 10 pipeline delays. Data outputs are available one propagation delay (t_{PD}) after the rising edge of the encode command (see Timing Diagram). The length of the output data lines and loads placed on them should be minimized to reduce transients within the AD9433; these transients can detract from the converter's dynamic performance. The minimum guaranteed conversion rate of the AD9433 is 1 MSPS. At internal clock rates below 1 MSPS, dynamic performance may degrade.

Replacing the AD9432 with the AD9433

The AD9433 is pin compatible with the AD9432, although there are 3 control pins on the AD9433 that are "do not connect (DNC), supply (V_{CC}) or ground connections on the AD9432. They are summarized in the table below.

Pin #	AD9432	AD9433
39	GND	GAIN
41	DNC	DFS
42	V _{CC}	SFDR MODE

Using the AD9433 in an AD9432 pin assignment will configure the AD9433 as follows:


- GAIN will be connected to GND, setting the analog input voltage range to 2V_{p-p}, which is the same as the AD9432.
- The SFDR improvement circuit will be enabled.

- The DFS pin will float LOW, selecting Two's Complement coding for the digital outputs.
- Other differences between the AD9432 and AD9433 are summarized as follows:

Attribute	AD9432	AD9433
ENCODE / ENCODE V _{COMMON MODE}	1.6V	3.75V
AIN / AIN V _{COMMON MODE}	3.0V	4.0V

AD9433BST OUTLINE DIMENSIONS

Dimensions shown in inches and (mm)

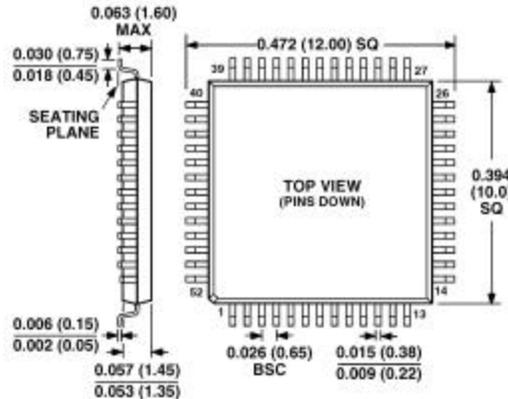

ST-52 Package