

High-performance 6-channel video driver IC for progressive DVD

BH7862FS

BH7862FS is a 6-channel video driver IC developed for progressive DVD player/recorder. Special filters adjusted to each band of various video signals are incorporated into a single chip. Extended definition, size reduction, and high cost performance can be achieved in DVD players.

●Application

DVD players, DVD recorders

●Features

- 1) Each high-performance filter, 6dB amplifier, and 75Ω driver for DVD are incorporated into a single chip.
- 2) Driver 6ch (Y, C, MIX, and PY, Pb, Pr for progressive)
- 3) Group delay difference between chroma signal and luminance signal is a small number of nsec.
- 4) Drive 2 lines of each signal
- 5) Operating by 5V single power supply
- 6) Built-in mute circuit

●Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Impressed voltage	V _{cc} max	6.0	V
Power dissipation	P _d	0.95*	W
Operating temperature range	T _{opr}	-10~+70	°C
Storage temperature range	T _{stg}	-55~+150	°C

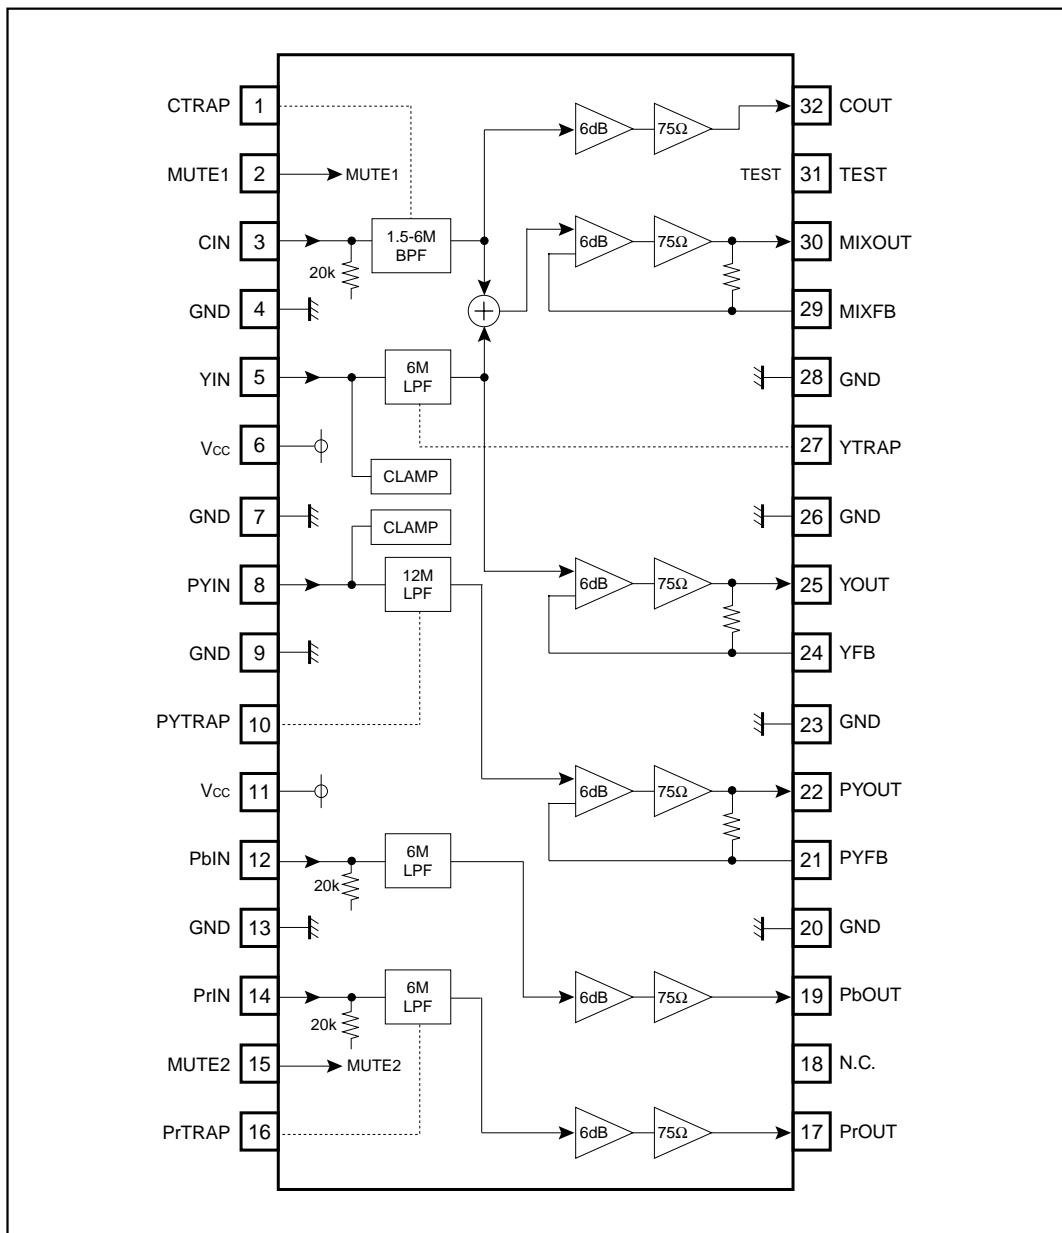
* Reduced by -7.6mW for each increase in T_a of 1°C over 25°C .
PCB (70mm×70mm, t=1.6mm) glass epoxy mounting.

●Recommended operating conditions ($T_a = 25^\circ\text{C}$)






Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V _{cc}	4.5	—	5.5	V





© Radiation resistance is not included in the design.

● Block diagram




●Pin descriptions and Input / output circuits

Pin No.	Pin name	Input/output equivalent circuit	Pin description
3 12 14	CIN PbIN PrIN		Signal input terminal. Input terminal for chroma signal and color-difference signal. Bias type input. The input impedance is 20kΩ.
5 8	YIN PYIN		Signal input terminal. Input terminal for luminance signal. Di clamp input.
32	COUT		Signal output terminal. Output terminal for chroma signal.
29 30	MIXFB MIXOUT		Signal output terminal. Output terminal for Y/C MIX signal.
24 25	YFB YOUT		Signal output terminal. Output terminal for luminance signal (interlaced type).

Pin No.	Pin name	Input/output equivalent circuit	Pin description
21 22	PYFB PYOUT		Signal output terminal. Output terminal for luminance signal (progressive type).
17 19	PrOUT PbOUT		Signal output terminal. Output terminal for color-difference signal.
1 27 10 16	CTPAP YTRAP PYTRAP PrTRAP		Terminal for LC resonance.
6 11	Vcc		Power supply voltage. Vcc is separated into 6 pin and 11 pin. That is to say, C, MIX and Y are partitioned by 6 pin and PY, Pb and Pr by 11 pin. They are not connected internally. Connect them externally when using.
4 7 9 13 20 23 26 28	GND		Grounding terminal.
2	MUTE1		Mute control terminal. C, MIX and Y are muted simultaneously by setting MUTE to "L".

Multimedia ICs

Pin No.	Pin name	Input/output equivalent circuit	Pin description
12	MUTE2		Mute control terminal. PY, Pb and PR are muted simultaneously by setting MUTE to "L".
31	TEST		Test terminal. Usually, short-circuit this terminal to GND when using it.
18	N.C.		—

Multimedia ICs

●Electrical characteristics (unless otherwise noted, Ta=25°C, Vcc=5.0V)

(*The standard values (Typical values) below are design value for your reference.)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current 1		Icc1	—	90	110	mA	No signal MUTE : OFF
Circuit current 2		Icc2	—	17	25	mA	No signal MUTE : ON
Maximum output level		Vom	2.6	3.0	—	Vpp	CIN : f=3.58MHz, YIN, PYIN, PbIN, PrIN : f=1MHz *1 Output tertiary distortion : -30dB
Voltage gain	C	Gvc	5.0	6.0	7.0	dB	CIN : f=3.58MHz, 1Vpp
	MIX(C)	Gvmixc	5.0	6.0	7.0	dB	CIN : f=3.58MHz, 1Vpp
	MIX(Y)	Gvmixy	5.0	6.0	7.0	dB	YIN : f=1MHz, 1Vpp
	Y	Gvy	5.0	6.0	7.0	dB	YIN : f=1MHz, 1Vpp
	PY	Gvpv	5.0	6.0	7.0	dB	PYIN : f=1MHz, 1Vpp
	Pb	Gvpb	5.0	6.0	7.0	dB	PbIN : f=1MHz, 1Vpp
	Pr	Gvpr	5.0	6.0	7.0	dB	PrIN : f=1MHz, 1Vpp
Frequency characteristics 1		Gfc	-2.0	0	2.0	dB	CIN : f=1.5/3.58MHz, 6/3.58MHz, 1Vpp
MIX1		Gfmix1	-2.0	0	2.0	dB	CIN : f=1.5/3.58MHz, 6/3.58MHz, 1Vpp
MIX2		Gfmix2	-2.0	0	2.0	dB	YIN : f=6/1MHz, 1Vpp
Y		Gfy	-2.0	0	2.0	dB	YIN : f=6/1MHz, 1Vpp
PY		Gfpv	-2.0	0	2.0	dB	PYIN : f=12/1MHz, 1Vpp
Pb		Gfpb	-2.0	0	2.0	dB	PbIN : f=6/1MHz, 1Vpp
Pr		Gfpr	-2.0	0	2.0	dB	PrIN : f=6/1MHz, 1Vpp
MUTE attenuation		Mt	—	-50	—	dB	CIN : f=3.58MHz, 1Vpp YIN, PYIN, PbIN, PrIN : f=1MHz, 1Vpp
Input impedance		Zin	16	20	24	kΩ	CIN, PbIN, PrIN input terminal *2
MUTE holding voltage	Vt1hh	4.0	—	Vcc	V	MUTE OFF	
	Vt1hl	GND	—	1.0	V	MUTE ON	
Frequency characteristics 2		Gfcatt	—	-40	—	dB	CIN : f=27/3.58MHz, 1Vpp
MIX1		Gfmix1att	—	-40	—	dB	CIN : f=27/3.58MHz, 1Vpp
MIX2		Gfmix2att	—	-40	—	dB	YIN : f=27/1MHz, 1Vpp
Y		Gfyatt	—	-40	—	dB	YIN : f=27/1MHz, 1Vpp
PY		Gfpvatt	—	-40	—	dB	PYIN : f=54/1MHz, 1Vpp
Pb		Gfpbatt	—	-20	—	dB	PbIN : f=27/1MHz, 1Vpp
Pr		Gfpratt	—	-20	—	dB	PrIN : f=27/1MHz, 1Vpp
Group delay characteristics Y↔C		ΔGd1	—	5.0	—	ns	YIN : f=1MHz, Vin=1Vpp CIN : f=3.58MHz, Vin=1Vpp GD difference between Y and C
PY↔Pb(Pr)		ΔGd2	—	5.0	—	ns	PYIN : f=1MHz, Vin=1Vpp PbIN(PrIN) : f=1MHz, Vin=1Vpp GD difference between PY and Pb (Pr)
Differential gain		Dg	—	1.0	—	%	1 Vpp standard staircase signal
Differential phase		Dp	—	0.5	—	deg	1 Vpp standard staircase signal
Crosstalk between channels C↔Y		Ct1	—	-50	—	dB	YIN : f=1MHz, 1Vpp CIN : f=3.58MHz, 1Vpp
Pb(Pr)↔PY		Ct2	—	-60	—	dB	PYIN : f=1MHz, 1Vpp Pb(Pr) : f=1MHz, 1Vpp
Pb↔Pr		Ct3	—	-60	—	dB	Pb(Pr) : f=1MHz, 1Vpp
C/N		Vn	—	-75	—	dB	100% white video signal

*1 Add the sine wave of "f=1MHz (C : f=3.58MHz)" to the input. Vin and adjust the input level so that the tertiary distortion of output can be -30dB.

Then, the output voltage shall be a maximum output level Vom(Vpp).

*2 Measure the input voltage Vin50(V) and input open circuit voltage Vin(V) when 50μA has applied to the input CIN, PbIN and PrIN. Then, the input impedance Zin is as follows : $Zin = |Vin50 - Vin| / 50\mu A$ [kΩ]

● Measurement circuit

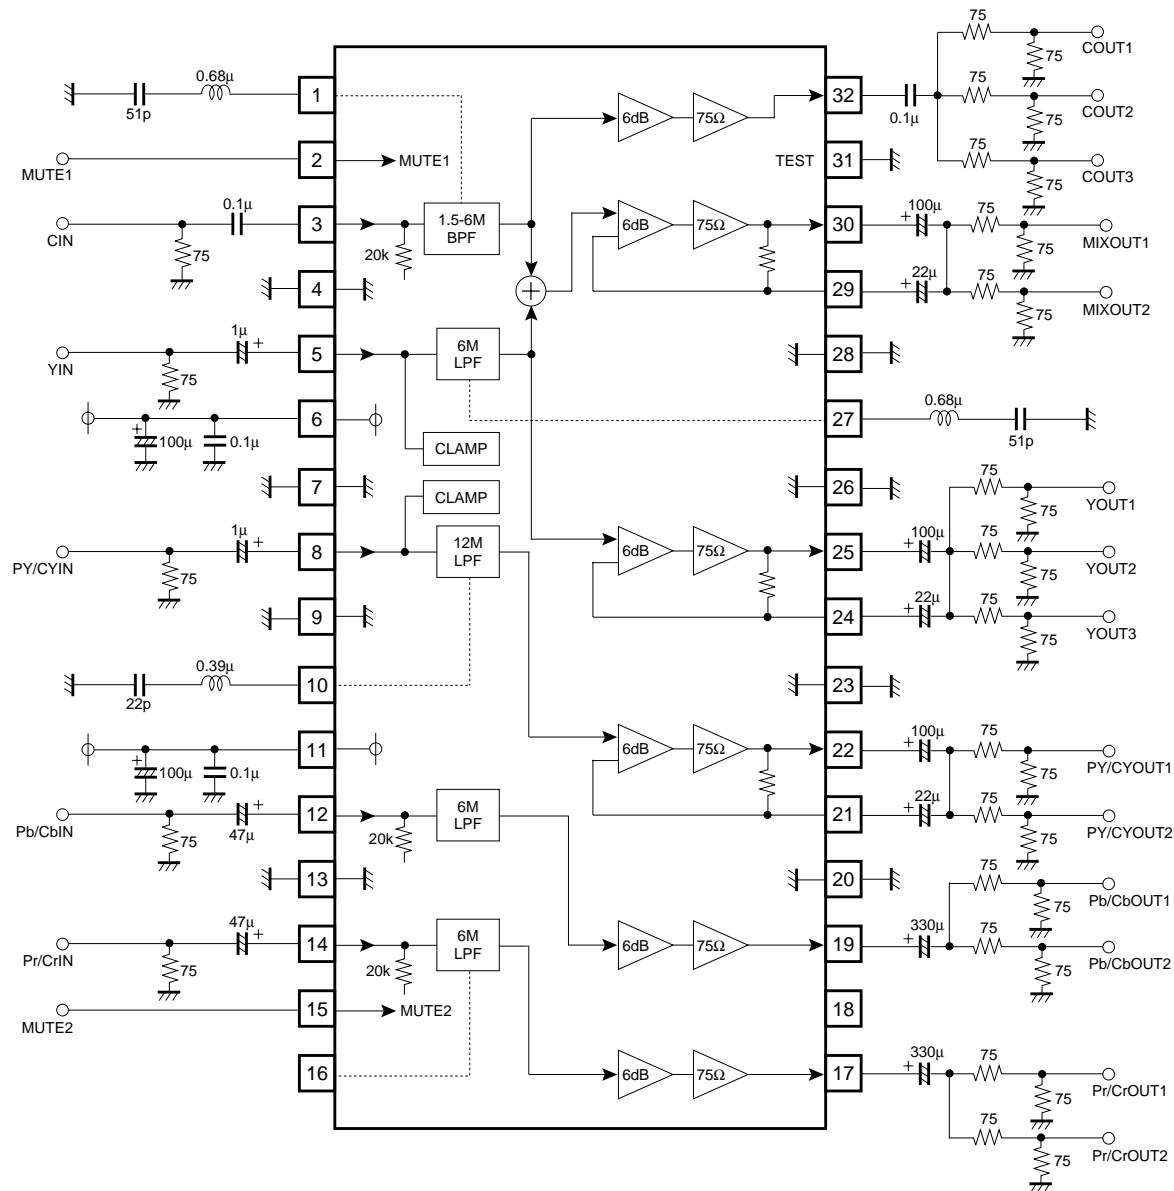


Fig.1

● Application example

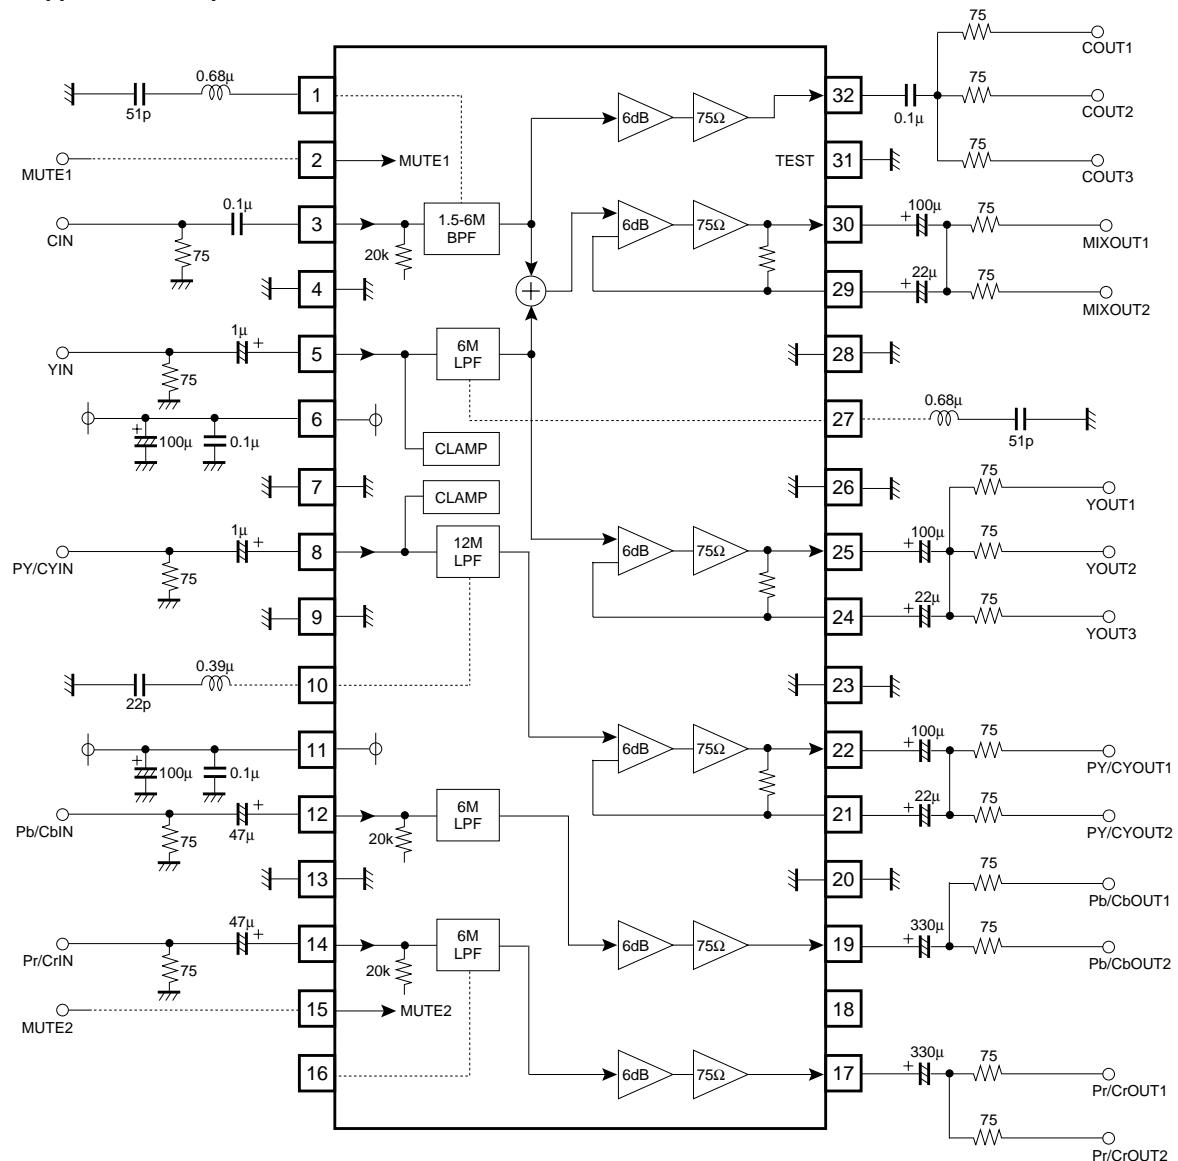


Fig.2

●Operation notes

- (1) Output terminal load resistance can be driven in three channels in SY signal and in two channels in any other signals. Use it within the allowable dissipation range.
- (2) Minimize the common impedance of power supply line of 6 pin and 11 pin.
- (3) Inductor and capacitor of series resonance can be removed. Treat them with great care when removing them, because the terminal may catch noise component. Even if they are removed, attenuation in TRAP frequency are not expected so much.

●External dimensions (Units : mm)