


DUAL POWER OPERATIONAL AMPLIFIER

ADVANCE DATA

- OUTPUT CURRENT TO 1A
- OPERATES AT LOW VOLTAGES
- SINGLE OR SPLIT SUPPLY
- LARGE COMMON-MODE AND DIFFERENTIAL MODE RANGE
- GROUND COMPATIBLE INPUTS
- LOW SATURATION VOLTAGE
- THERMAL SHUTDOWN

cations including servo amplifiers and power supplies, compact disc, VCR, etc. The high gain and high output power capability provide superior performance whenever an operational amplifier/power booster combination is required.



SO-16J



ORDERING NUMBER: L272D

The L272D is a monolithic integrated circuit in SO-16 packages intended for use as power operational amplifier in a wide range of appli-


ABSOLUTE MAXIMUM RATINGS

V_s	Supply voltage	28	V
V_i	Input voltage	V_s	
V_i	Differential input voltage	$\pm V_s$	
I_o	DC Output current	1	A
I_p	Peak output current (non repetitive)	1.5	A
P_{tot}	Power dissipation at $T_{case} = 90^\circ\text{C}$	1.2	W
T_{stg}, T_j	Storage and junction temperature	-40 to 150	$^\circ\text{C}$

CONNECTION DIAGRAMS

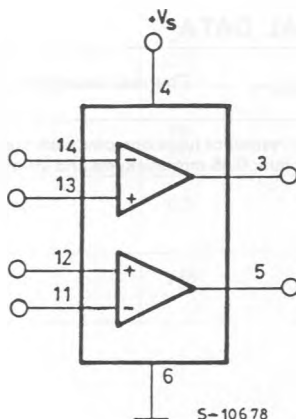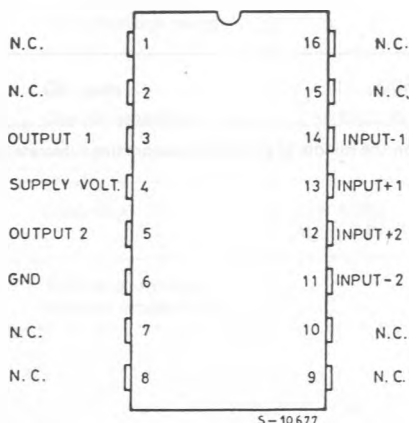

SCHEMATIC DIAGRAM (one only)

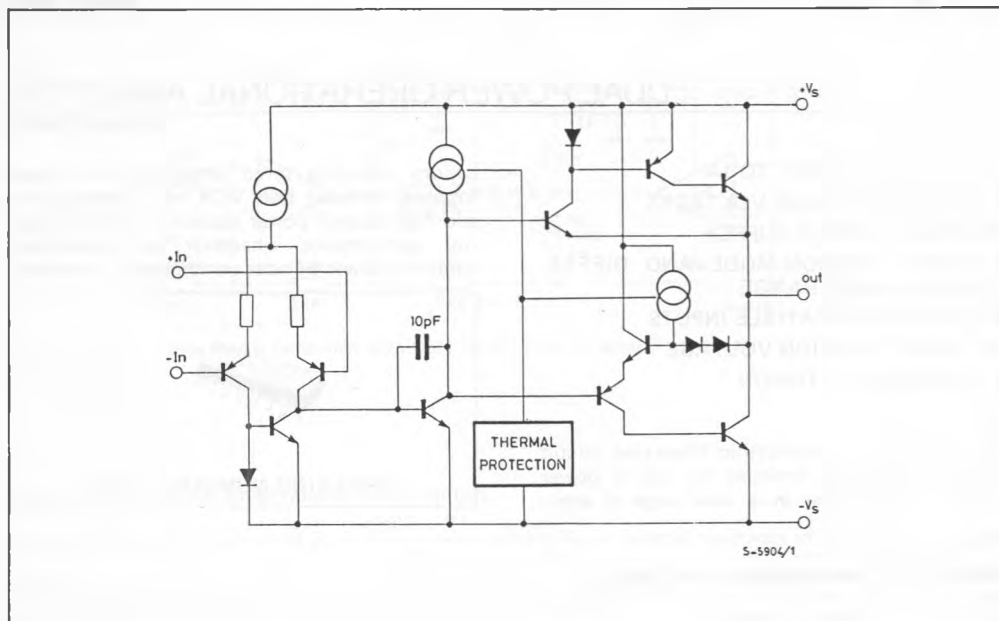

THERMAL DATA

 $R_{thj-alumina}^{(*)}$

Thermal resistance junction-alumina

max 50

 $^{\circ}\text{C/W}$

(*) Thermal resistance junctions-pins with the chip soldered on the middle of an alumina supporting substrate measuring 15 x 20 mm; 0.65 mm thickness and infinite heatsink.

ELECTRICAL CHARACTERISTICS ($V_s = 24V$, $T_{amb} = 25^\circ C$ unless otherwise specified)

Parameter		Test Conditions		Min.	Typ.	Max.	Unit
V _s	Supply voltage			4		28	V
I _s	Quiescent drain current	V _O = $\frac{V_s}{2}$	V _s = 24V		8	12	mA
			V _s = 12V		7.5	11	mA
I _b	Input bias current				0.3	2.5	μA
V _{OS}	Input offset voltage				15	60	mV
I _{OS}	Input offset current				50	250	nA
SR	Slew rate				1		V/μs
B	Gain-bandwidth product				350		KHz
R _i	Input resistance				500		KΩ
G _v	O.L. voltage gain	f = 100Hz		60	70		dB
		f = 1KHz			50		dB
e _N	Input noise voltage	B = 20KHz			10		μV
I _N	Input noise current	B = 20KHz			200		pA
CRR	Common Mode rejection	f = 1KHz		60	75		dB
SVR	Supply voltage rejection	f = 100Hz R _G = 10KΩ V _R = 0.5V	V _s = 24V V _s = ± 12V V _s = ± 6V	54	70 62 56		dB dB dB
V _O	Output voltage swing	I _D = 0.1A		21	23		V
		I _D = 0.5A			22.5		V
C _s	Channel separation	f = 1KHz; R _L = 10Ω; G _v = 30dB V _s = 24V V _s = ± 6V			60 60		dB dB
d	Distortion	f = 1KHz V _s = 24V	G _v = 30dB R _L = ∞		0.5		%
T _{sd}	Thermal shutdown junction temperature				145		°C

Fig. 1 - Quiescent current vs. supply voltage




Fig. 2 - Quiescent drain current vs. temperature




Fig. 3 - Open loop voltage gain




Fig. 4 - Output voltage swing vs. load current




Fig. 5 - Output voltage swing vs. load current




Fig. 6 - Supply voltage rejection vs. frequency




Fig. 7 - Channel separation vs. frequency




Fig. 8 - Common mode rejection vs. frequency

