



LA7471M

Two-Channel Microphone Amplifier for Video Camera

Overview

The LA7471M is a stereo microphone amplifier for use in video camera products. It includes an automatic wind noise detection and removal circuit, an equalization circuit to compensate for microphone frequency characteristics and an L/R mixing circuit to provide a good stereo image. The LA7471M provides high quality audio for video camera applications.

Functions

- Microphone amplifier (two channels)
- Internal/external microphone switching
- Automatic wind noise detection/prevention circuit
- High-pass filter and disable switch
- Internal microphone power supply
- External microphone power supply (with current limiter)
- Ripple filter
- Stereo/mono detection for external microphones

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC \text{ max}}$		7.0	V
Allowable power dissipation	$P_d \text{ max}$	$T_a \leq 65^\circ\text{C}$	300	mW
Operating temperature	T_{opr}		-10 to +65	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		5.0	V
Operating supply voltage range	$V_{CC \text{ op}}$		4.5 to 5.5	V

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

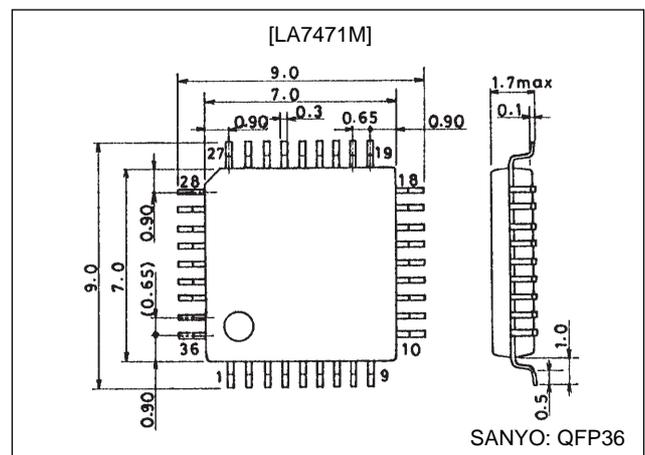
Features

- Automatic wind noise detection and exclusion circuit (The high-pass filter provides a first-order to third-order linear conversion.)
- High-quality audio (low noise, microphone frequency characteristic compensation, and stereo enhancement)

Package Dimensions

unit: mm

3162B-QFP36




LA7471M

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$, $f = 1.0\text{ kHz}$, $R_L = 10\text{ k}\Omega$


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation	I_{CC1}	INT MIC in, EXT V_{CC} off, L/Rch	5.5	8	10.5	mA
	I_{CC2}	INT MIC in, EXT V_{CC} on, L/Rch	6	9	12	mA
Voltage gain	VG_1	EXT MIC in, L/Rch	27.3	27.8	28.3	dB
	VG_2	INT MIC in, Gain CTL Hi, L/Rch	23.8	24.3	24.8	dB
	VG_3	INT MIC in, Gain CTL Mi, L/Rch	20.8	21.3	21.8	dB
	VG_4	INT MIC in, Gain CTL Lo, L/Rch	17.8	18.3	18.8	dB
Total harmonic distortion	THD	INT MIC in, EXT MIC in $V_O = 300\text{ mVrms}$, L/Rch		0.05	0.2	%
Maximum output	V_{OM}	INT MIC in, EXT MIC in THD = 1%, L/Rch	1.0	1.4		Vrms
Output noise voltage	V_{NO1}	EXT MIC in, L/Rch, $R_g = 1\text{ k}\Omega$, JIS-A		22	32	μVrms
	V_{NO2}	INT MIC in, L/Rch, $R_g = 1\text{ k}\Omega$, JIS-A Gain CTL Hi, Mi, Lo		16	24	μVrms
Input switch crosstalk	SW_{CR}	INT MIC in \rightarrow EXT MIC in ($R_g = 1\text{ k}\Omega$) $f = 10\text{ kHz}$, L/Rch		80	70	dB
Inter-channel crosstalk	CH_{CR}	INT/EXT MIC, Lch \rightarrow Rch, Rch \rightarrow Lch, $f = 10\text{ kHz}$		51	45	dB
Internal microphone power supply output voltage	V_{INM}	When pin 31 is DC, with $30\text{ k}\Omega$ load	2.65	2.8	2.95	V
External power supply output voltage	V_{EXM}	When connected to pin 16 (output current)	4.0	4.5		V
External power supply limiter current	I_{LIM}	When connected to pin 16 (output current)			30	mA
Input switching control voltage	CTL_H	High level, pin 29/pin 35 DC	1.3		V_{CC}	V
	CTL_L	Low level, pin 29/pin 35 DC	0		0.7	V
Input impedance	Z_{IN}	INT/EXT MIC in, L/Rch	60	75	90	$\text{k}\Omega$
Output impedance	Z_O	Pins 8 and 20		1	5	Ω

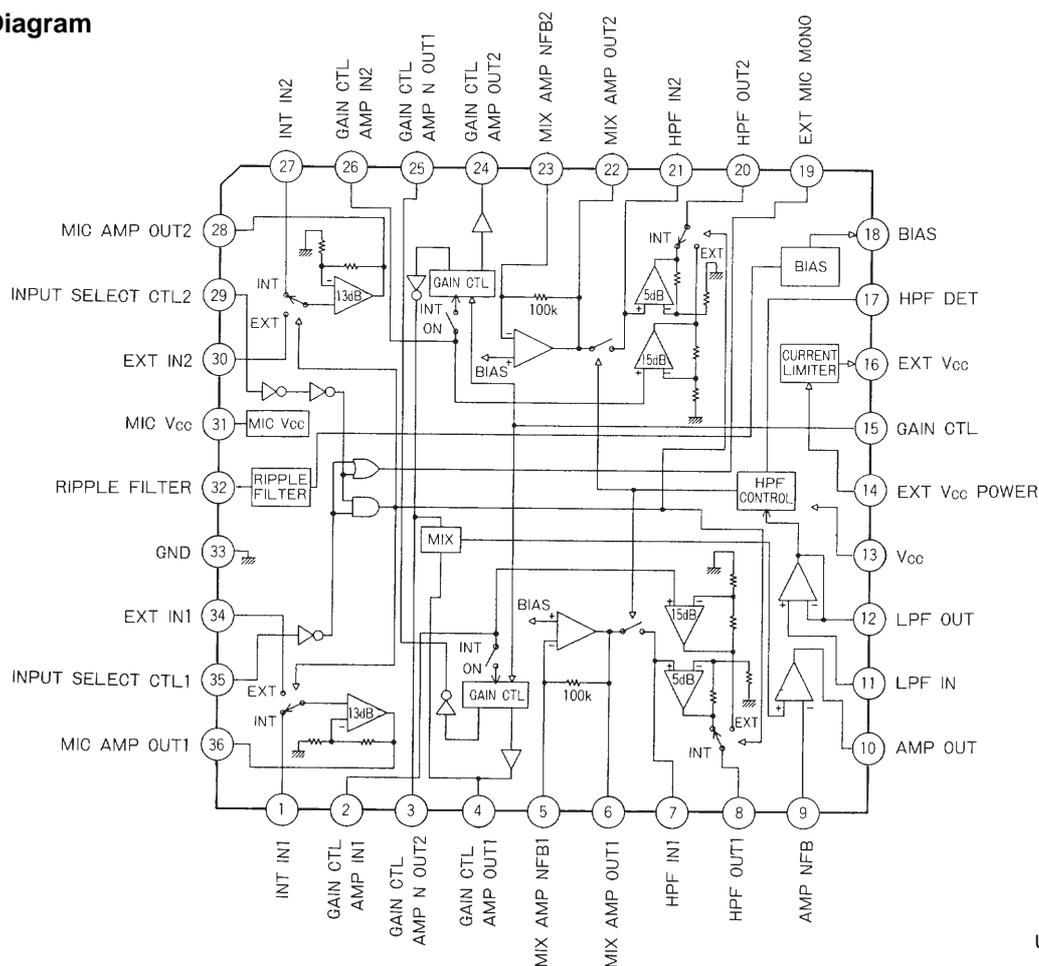Block Diagram



Test Circuit Diagram

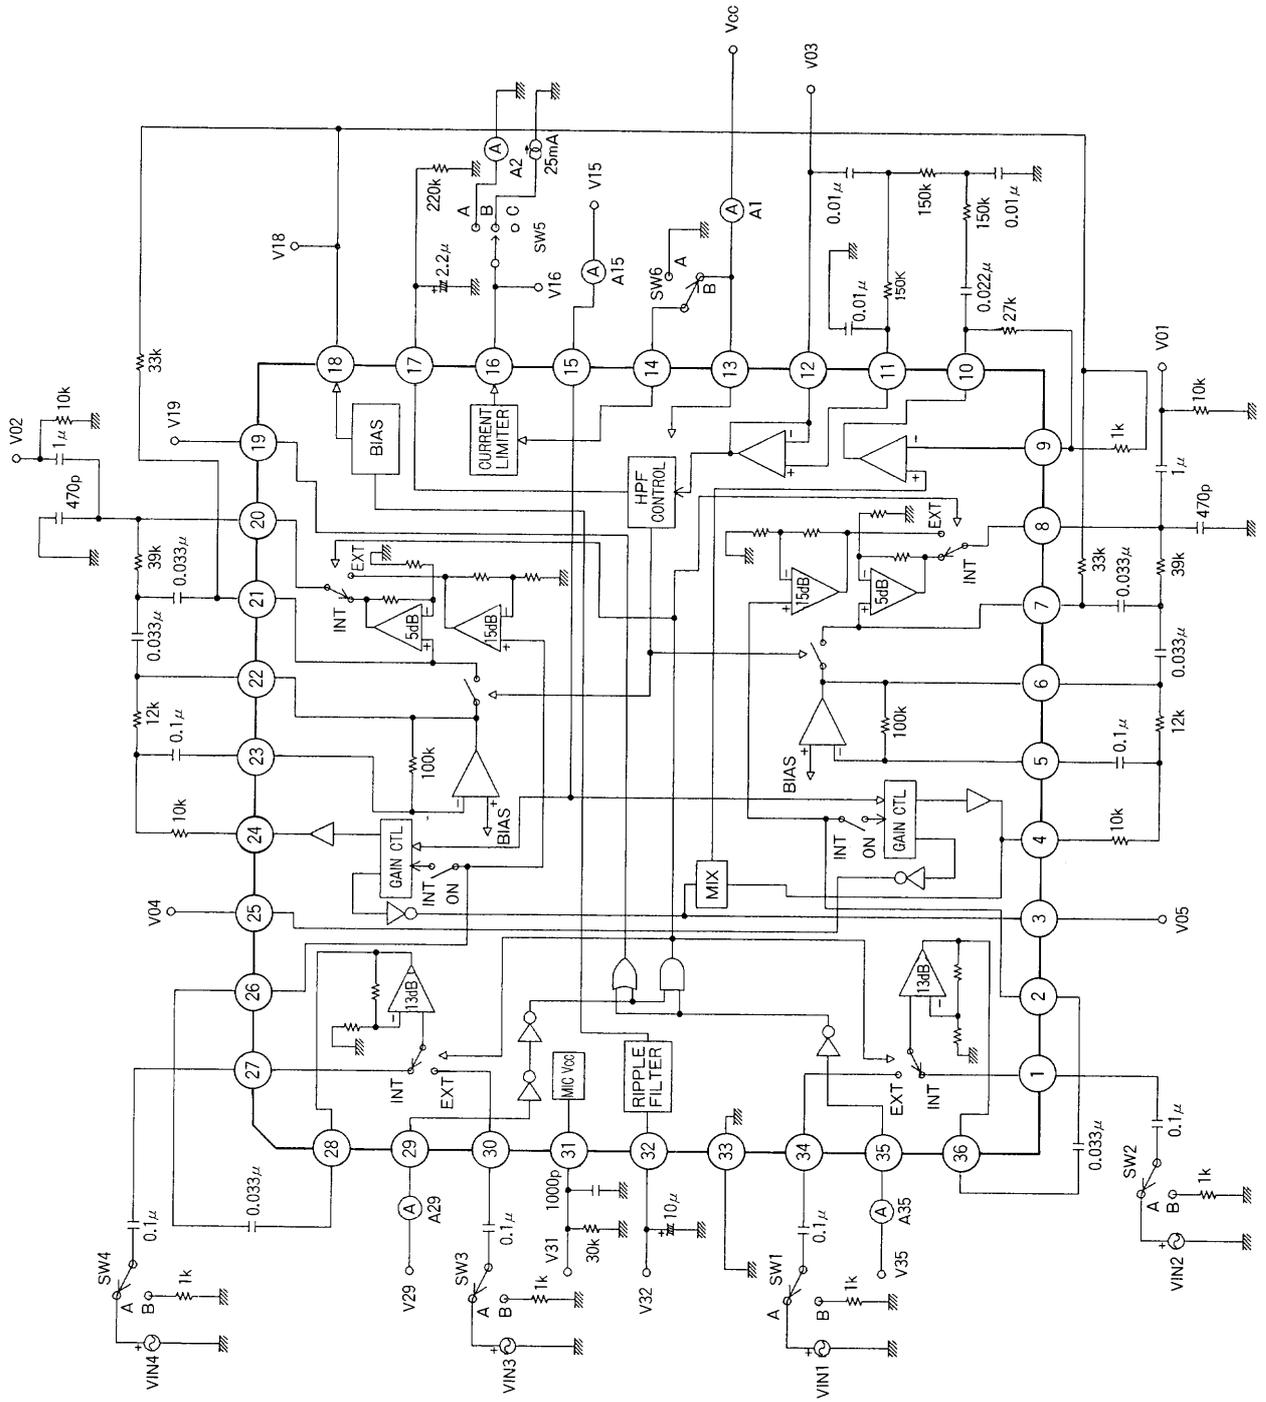Unit (resistance: Ω, capacitance: F)



LA7471M

Switch Operation Table

Item	Symbol	SW1	SW2	SW3	SW4	SW5	SW6	V15	V29	V35	Test point
Current dissipation 1	I _{CC1}	B	B	B	B	C	A	L	H	L	A ₁
Current dissipation 2	I _{CC2}	B	B	B	B	C	B	L	H	L	A ₁
Voltage gain 1	VG ₁₋₁	A	B	B	B	C	A	L	L	L	V _{O1}
	VG ₁₋₂	B	B	A	B	C	A	L	L	L	V _{O2}
Voltage gain 2	VG ₂₋₁	B	A	B	B	C	A	H	H	L	V _{O1}
	VG ₂₋₂	B	B	B	A	C	A	H	H	L	V _{O2}
Voltage gain 3	VG ₃₋₁	B	A	B	B	C	A	M	H	L	V _{O1}
	VG ₃₋₂	B	B	B	A	C	A	M	H	L	V _{O2}
Voltage gain 4	VG ₄₋₁	B	A	B	B	C	A	L	H	L	V _{O1}
	VG ₄₋₂	B	B	B	A	C	A	L	H	L	V _{O2}
Total harmonic distortion	THD ₁₋₁	A	B	B	B	C	A	L	L	L	V _{O1}
	THD ₁₋₂	B	B	A	B	C	A	L	L	L	V _{O2}
	THD ₂₋₁	B	A	B	B	C	A	H	H	L	V _{O1}
	THD ₂₋₂	B	B	B	A	C	A	H	H	L	V _{O2}
	THD ₃₋₁	B	A	B	B	C	A	M	H	L	V _{O1}
	THD ₃₋₂	B	B	B	A	C	A	M	H	L	V _{O2}
	THD ₄₋₁	B	A	B	B	C	A	L	H	L	V _{O1}
	THD ₄₋₂	B	B	B	A	C	A	L	H	L	V _{O2}
Maximum output	V _{OM1-1}	A	B	B	B	C	A	L	L	L	V _{O1}
	V _{OM1-2}	B	B	A	B	C	A	L	L	L	V _{O2}
	V _{OM2-1}	B	A	B	B	C	A	H	H	L	V _{O1}
	V _{OM2-2}	B	B	B	A	C	A	H	H	L	V _{O2}
	V _{OM3-1}	B	A	B	B	C	A	M	H	L	V _{O1}
	V _{OM3-2}	B	B	B	A	C	A	M	H	L	V _{O2}
	V _{OM4-1}	B	A	B	B	C	A	L	H	L	V _{O1}
	V _{OM4-2}	B	B	B	A	C	A	L	H	L	V _{O2}
Output noise voltage 1	V _{NO1-1}	B	B	B	B	C	A	L	L	L	V _{O1}
	V _{NO1-2}	B	B	B	B	C	A	L	L	L	V _{O2}
Output noise voltage 2	V _{NO2-1}	B	B	B	B	C	A	H	H	L	V _{O1}
	V _{NO2-2}	B	B	B	B	C	A	H	H	L	V _{O2}
	V _{NO2-3}	B	B	B	B	C	A	M	H	L	V _{O1}
	V _{NO2-4}	B	B	B	B	C	A	M	H	L	V _{O2}
	V _{NO2-5}	B	B	B	B	C	A	L	H	L	V _{O1}
	V _{NO2-6}	B	B	B	B	C	A	L	H	L	V _{O2}
Input switch crosstalk	S _{CR1}	B	A	B	B	C	A	L	L	L	V _{O1}
	S _{CR2}	B	B	B	A	C	A	L	L	L	V _{O2}
Inter-channel crosstalk	C _{cn1-1}	A	B	B	B	C	A	L	L	L	V _{O2}
	C _{cn1-2}	B	B	A	B	C	A	L	L	L	V _{O1}
	C _{cn2-1}	B	A	B	B	C	A	H	H	L	V _{O2}
	C _{cn2-2}	B	B	B	A	C	A	H	H	L	V _{O1}
Internal microphone power supply output voltage	V _{INM}	B	B	B	B	C	A	L	L	L	V ₃₁
External power supply output voltage	V _{EXM}	B	B	B	B	B	B	L	L	L	V ₁₆
External power supply limiter current	I _{LIM}	B	B	B	B	A	B	L	L	L	A ₂

LA7471M

Pin Functions







Unit (resistance: Ω)

Pin No.	Function	Internal Circuit	DC Voltage	Description
1 27	INT in		2.1 V	Internal microphone input The input impedance is 75 k Ω .
2 26	Gain CTL AMP in		2.1 V	Gain control amplifier input The input impedance is 100 k Ω .
3 25	Gain CTL AMP N out		2.1 V	Gain control amplifier inverted output
4 24	Gain CTL AMP out		2.1 V	Gain control amplifier output
5 23	Mix AMP NFB		2.1 V	Mixer amplifier NFB pin
6 22	Mix AMP out		2.1 V	Mixer amplifier output
7 21	HPF in		2.1 V	High-pass filter amplifier input This is a high impedance input.

LA7471M

Continued from preceding page.

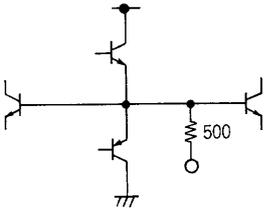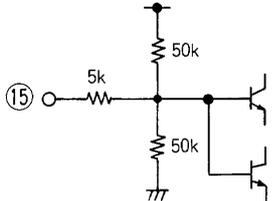Unit (resistance: Ω)

Pin No.	Function	Internal Circuit	DC Voltage	Description
8 20	HPF out		2.1 V	Output for the high-pass filter 5 dB amplifier and the EXT mode 15 dB amplifier
9	AMP NFB		2.1 V	NFB for the amplifier that adjusts the wind noise exclusion high-pass filter on/off level
10	AMP out		2.1 V	Output for the amplifier that adjusts the wind noise exclusion high-pass filter on/off level This is a low impedance output.
11	LPF in		2.1 V	Buffer input for forming a low-pass filter. The input impedance is 200 k Ω .
12	LPF out		2.1 V	Buffer output for forming a low-pass filter. This is a low impedance output.
13	V _{CC}		V _{CC}	Power supply for circuits other than the external V _{CC} circuit
14	EXT V _{CC} power			External V _{CC} circuit power supply
15	Gain CTL			Gain control pin High level (4 V or higher): 6 dB Mid level (2 to 3 V): 3 dB Low level (1 V or lower): 0 dB

Continued on next page.

LA7471M

Continued from preceding page.

Unit (resistance: Ω)

Pin No.	Function	Internal Circuit	DC Voltage	Description
16	EXT V _{CC}			External power supply with current limiter Capable of providing at least 4 V when an output current is 25 mA. When the output voltage is 0 V, the output current is less than 25 mA.
17	HPF DET			Detects the level used to turn the high-pass filter on and off.
18	BIAS		2.1 V	Reference voltage
19	EXT MIC mono			Outputs a low level only when the external microphone is monophonic.
28 36	Mic AMP out		2.1 V	Microphone amplifier output This is a low-impedance output.
29	Input select CTL2			Internal/external switch Control pin used to determine stereo or monophonic operation

Continued on next page.

LA7471M

Continued from preceding page.

Unit (resistance: Ω)

Pin No.	Function	Internal Circuit	DC Voltage	Description
30 34	EXT in		2.1 V	External microphone input The input impedance is 75 k Ω .
31	Mic V _{CC}		2.8 V	Power supply for the internal microphone
32	Ripple filter		2.1 V	This pin is used to exclude ripple from internal circuits. Connect a capacitor and a resistor of 75 k Ω externally to exclude ripple.
33	GND		0	
35	Input select CTL1			Internal/external switch Control pin used to determine stereo or monophonic operation

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1998. Specifications and information herein are subject to change without notice.