

# LM1203C RGB VIDEO-AMPLIFIER SYSTEM

SLVS099B – NOVEMBER 1994 – REVISED FEBRUARY 1996

- Wide Bandwidth Typ 70 MHz at –3 dB
- Matched  $\pm 0.5$ -dB Attenuators for Contrast Control
- Three Externally Gated Comparators for Brightness Control
- Independent Gain Control of Each Video Amplifier . . .  $A_V = 4$  V/V to 10 V/V
- Video-Input Voltage Reference
- Low-Impedance Output Driver
- Designed to Be an Improved Replacement for Texas Instruments LM1203AN and National Semiconductor LM1203

## description

The LM1203C is a wide-band video-amplifier system intended for high-resolution RGB (red-green-blue) color monitor applications. In addition to three matched video amplifiers, the LM1203C contains three gated differential-input black-level clamp comparators for brightness control and three matched attenuator circuits for contrast control. Each video amplifier contains a gain set for adjusting maximum system gain ( $A_V = 4$  V/V to 10 V/V) as well as providing trim capability. The LM1203C also contains a voltage reference for the video inputs.

The LM1203C is characterized for operation from 0°C to 70°C.

## N PACKAGE (TOP VIEW)

|                  |    |    |                  |
|------------------|----|----|------------------|
| V <sub>CC1</sub> | 1  | 28 | V <sub>CC1</sub> |
| CONTRAST CAP1    | 2  | 27 | R GAIN ADJUST    |
| CONTRAST CAP2    | 3  | 26 | R CLAMP(-)       |
| R VIDEO IN       | 4  | 25 | R VIDEO OUT      |
| R CLAMP CAP      | 5  | 24 | R CLAMP(+)       |
| G VIDEO IN       | 6  | 23 | V <sub>CC2</sub> |
| GND              | 7  | 22 | G GAIN ADJUST    |
| G CLAMP CAP      | 8  | 21 | G CLAMP(-)       |
| B VIDEO IN       | 9  | 20 | G VIDEO OUT      |
| B CLAMP CAP      | 10 | 19 | G CLAMP(+)       |
| REF              | 11 | 18 | B GAIN ADJUST    |
| CONTRAST         | 12 | 17 | B CLAMP(-)       |
| V <sub>CC1</sub> | 13 | 16 | B VIDEO OUT      |
| CLAMP GATE       | 14 | 15 | B CLAMP(+)       |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443


Copyright © 1996, Texas Instruments Incorporated

8961724 0101222 T25

# LM1203C RGB VIDEO-AMPLIFIER SYSTEM

SLVS099B – NOVEMBER 1994 – REVISED FEBRUARY 1996

## functional block diagram

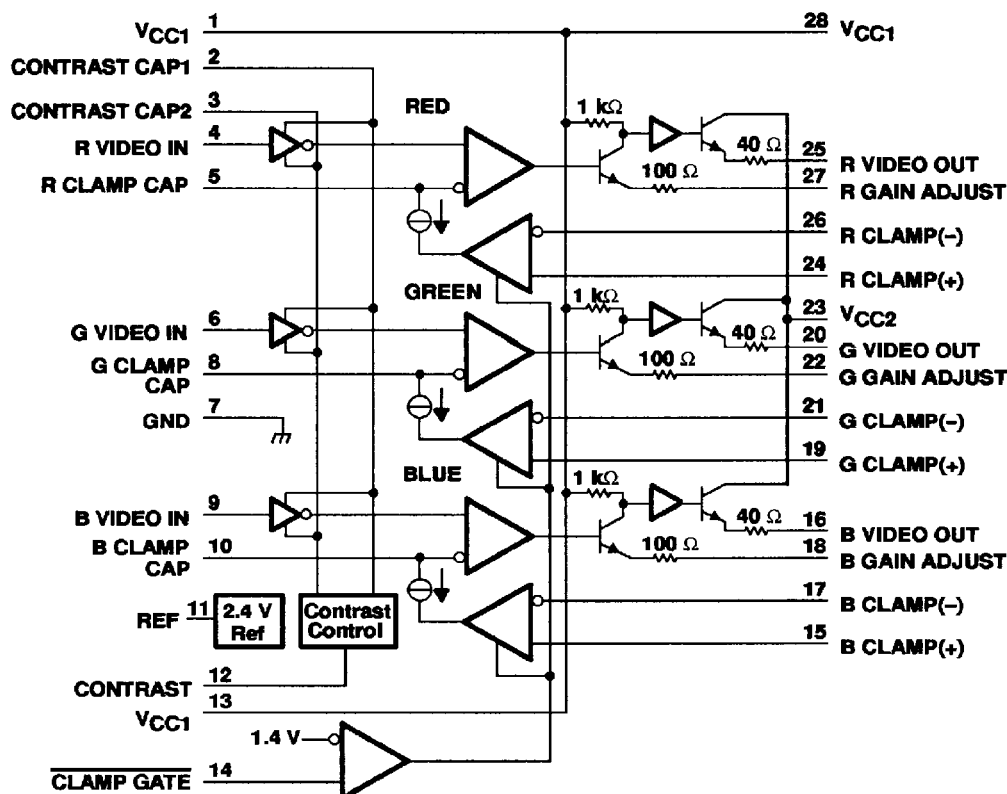

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                              |                                   |
|------------------------------------------------------------------------------|-----------------------------------|
| Supply voltage, $V_{CC}$ (see Note 1)                                        | 13.5 V                            |
| Input voltage range, $V_I$                                                   | $V_{CC} \geq V_I \geq \text{GND}$ |
| Video output current                                                         | 28 mA                             |
| Total power dissipation at (or below) 25°C free-air temperature (see Note 2) | 2.5 W                             |
| Operating junction temperature, $T_J$                                        | 150°C                             |
| Operating free-air temperature range, $T_A$                                  | 0°C to 70°C                       |
| Storage temperature range, $T_{stg}$                                         | -65°C to 150°C                    |
| Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds                 | 260°C                             |

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All  $V_{CC}$  terminals must be externally wired together to prevent internal damage during  $V_{CC}$  power-on/off cycles.  
2. For operation above 25°C free-air temperature, derate linearly at the rate of 20 mW/°C.

## recommended operating conditions

|                                                      | MIN | NOM | MAX | UNIT |
|------------------------------------------------------|-----|-----|-----|------|
| Supply voltage, $V_{CC1}$ and $V_{CC2}$              |     | 12  |     | V    |
| High-level input voltage range, CLAMP GATE, $V_{IH}$ |     | 2   |     | V    |
| Low-level input voltage range, CLAMP GATE, $V_{IL}$  |     |     | 0.8 | V    |
| Operating free-air temperature, $T_A$                | 0   |     | 70  | °C   |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

8961724 0101223 961

# LM1203C RGB VIDEO-AMPLIFIER SYSTEM

SLVS099B - NOVEMBER 1994 - REVISED FEBRUARY 1996

electrical characteristics at 25°C free-air temperature, CONTRAST = 6 V, CLAMP GATE = 0,  $V_{\text{clamp}(+)} = 2 \text{ V}$ ,  $V_{\text{CC1}} = V_{\text{CC2}} = 12 \text{ V}$  (see Figure 1) (unless otherwise noted)

| PARAMETER                                                                      | ALT SYMBOL                   | TEST CONDITIONS                                                            | MIN   | TYP       | MAX      | UNIT          |
|--------------------------------------------------------------------------------|------------------------------|----------------------------------------------------------------------------|-------|-----------|----------|---------------|
| $I_{\text{CC}}$ Supply current                                                 |                              | $V_{\text{CC1}}$ only                                                      |       | 60        | 90       | mA            |
| $V_{\text{ref}}$ Video input reference voltage                                 |                              |                                                                            | 2.2   | 2.4       | 2.6      | V             |
| $I_{\text{IB}}$ Video input bias current (any amplifier)                       |                              |                                                                            |       | 5         | 20       | $\mu\text{A}$ |
| $I_{\text{IL}}$ CLAMP GATE low input current                                   | $I_{\text{IL}}(14)$          | CLAMP GATE = 0                                                             | -0.5  |           | -5       | $\mu\text{A}$ |
| $I_{\text{IH}}$ CLAMP GATE high input current                                  | $I_{\text{IH}}(14)$          | CLAMP GATE = $V_{\text{CC}}$                                               | 0.005 |           | 1        | $\mu\text{A}$ |
| Clamp capacitor charge current                                                 | $I_{\text{K}}(\text{chg})$   | R, G, or B CLAMP CAPS = 0                                                  |       | 850       |          | $\mu\text{A}$ |
| Clamp capacitor discharge current                                              | $I_{\text{K}}(\text{dschg})$ | R, G, or B CLAMP CAPS = 5 V                                                |       | -850      |          | $\mu\text{A}$ |
| $V_{\text{OL}}$ Low-level output voltage                                       |                              | R, G, or B CLAMP CAPS = 0                                                  |       | 1.2       |          | V             |
| $V_{\text{OH}}$ High-level output voltage                                      |                              | R, G, or B CLAMP CAPS = 5 V                                                |       | 8.9       |          | V             |
| $V_{\text{O}}(\text{diff})$ Output voltage difference between any two channels | $V_{\text{Odiff}}$           | $V_{\text{clamp}(+)} = 2 \text{ V}$<br>$V_{\text{clamp}(+)} = 4 \text{ V}$ |       | $\pm 0.5$ | $\pm 50$ | mV            |

operating characteristics at 25°C free-air temperature, CLAMP GATE = 0 V, R CLAMP(+) = G CLAMP(+) = B CLAMP(+) = 4 V,  $f_1 = 10 \text{ kHz}$  (unless otherwise noted)

| PARAMETER                                                  | ALT SYMBOL                            | TEST CONDITIONS                                             | MIN | TYP       | MAX | UNIT |
|------------------------------------------------------------|---------------------------------------|-------------------------------------------------------------|-----|-----------|-----|------|
| $A_{\text{V}}(\text{max})$ Maximum voltage amplification   | $A_{\text{V}}\text{MAX}$              | CONTRAST = 12 V, $V_{\text{I}}(\text{PP}) = 560 \text{ mV}$ |     | 7.8       |     | V/V  |
| $A_{\text{V}}(\text{mid})$ Mid-range voltage amplification | $A_{\text{V}}\text{MID}$              | CONTRAST = 5 V, $V_{\text{I}}(\text{PP}) = 560 \text{ mV}$  |     | 2.5       |     | V/V  |
| Contrast voltage for minimum amplification                 | $V_{12\text{low}}$                    | $V_{\text{I}}(\text{PP}) = 1 \text{ V}$ , See Note 3        |     | 2         |     | V    |
| Amplification match at $A_{\text{V}}(\text{max})$          | $A_{\text{V}}\text{MAX}(\text{DIFF})$ | CONTRAST = 12 V, See Note 4                                 |     | $\pm 0.2$ |     | dB   |
| Amplification match at $A_{\text{V}}(\text{mid})$          | $A_{\text{V}}\text{MID}(\text{DIFF})$ | CONTRAST = 5 V, See Note 3                                  |     | $\pm 0.2$ |     | dB   |
| Amplification match at $A_{\text{V}}(\text{low})$          | $A_{\text{V}}\text{LOW}(\text{DIFF})$ | CONTRAST = $V_{12\text{low}}$ , See Notes 3 and 4           |     | $\pm 0.2$ |     | dB   |
| THD Total harmonic distortion                              |                                       | CONTRAST = 3 V, $V_{\text{I}}(\text{PP}) = 1 \text{ V}$     |     | 0.5%      |     |      |
| BW Amplifier bandwidth                                     | $\text{BW}(-3 \text{ dB})$            | CONTRAST = 12 V, See Notes 5 and 7                          |     | 70        |     | MHz  |
| Crosstalk attenuation                                      | $a_x$                                 | CONTRAST = 12 V, $f = 10 \text{ kHz}$ , See Note 6          |     | 60        |     | dB   |
|                                                            |                                       | CONTRAST = 12 V, $f = 10 \text{ MHz}$ , See Notes 6 and 7   |     | 40        |     |      |

- NOTES: 3. Determine contrast voltage for minimum amplification for -40-dB attenuation of output. Reference to  $A_{\text{V}}$  maximum.  
4. Measure gain difference between any two amplifiers,  $V_{\text{I}}(\text{PP}) = 1 \text{ V}$ .  
5. Adjust input frequency from 10 kHz ( $A_{\text{V}}$  maximum ref level) to the -3-dB corner frequency ( $f - 3 \text{ dB}$ ).  $V_{\text{I}}(\text{PP}) = 560 \text{ mV}$ .  
6.  $V_{\text{I}}(\text{PP}) = 560 \text{ mV}$  at  $f = 10 \text{ kHz}$  to any amplifier. Measure output levels of the other two undriven amplifiers relative to driven amplifier to determine channel separation. Terminate the undriven amplifier inputs to simulate generator loading. Repeat test at  $f = 10 \text{ MHz}$  for  $a_x = 10 \text{ MHz}$ .  
7. A special test fixture without a socket is required.




POST OFFICE BOX 855303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

8961724 0101224 8T8

# LM1203C RGB VIDEO-AMPLIFIER SYSTEM

SLVS099B - NOVEMBER 1994 - REVISED FEBRUARY 1996

## PARAMETER MEASUREMENT INFORMATION

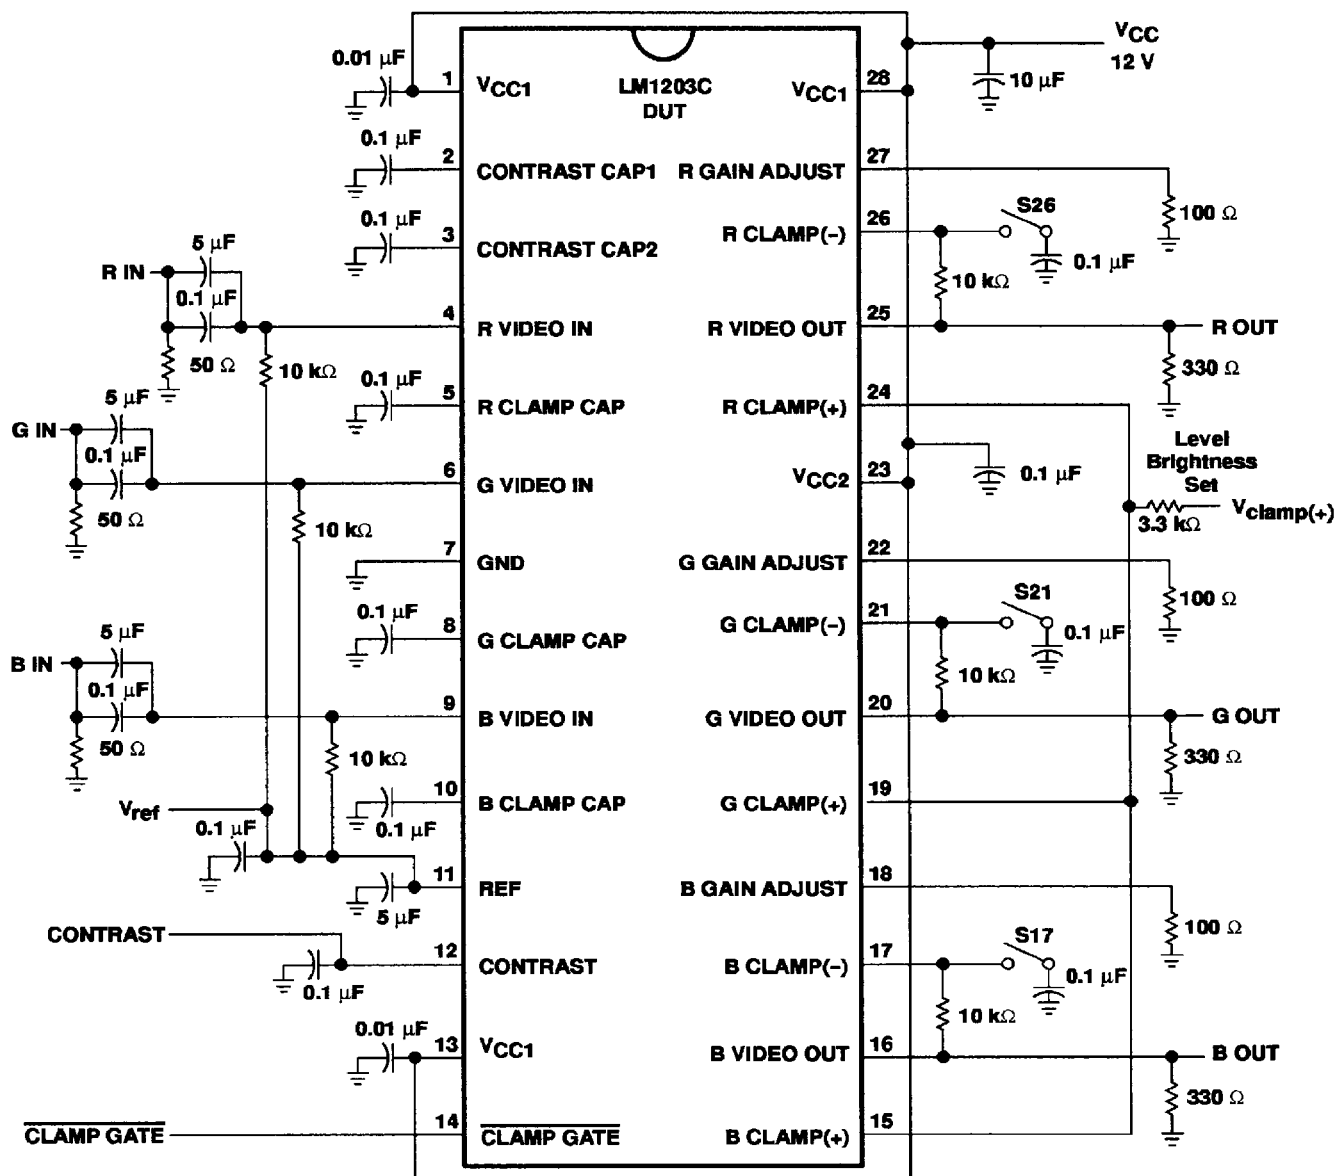

- NOTES: A. For optimal performance, Texas Instruments recommends the exact values shown for the components represented in this circuit schematic.
- B. For optimized video-board design, discrete capacitors at CONTRAST CAP1 and CONTRAST CAP2 connected to ground can be eliminated, depending on individual requirements for noise reduction.


Figure 1. Test Circuit



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

8961724 0101225 734

## APPLICATION INFORMATION

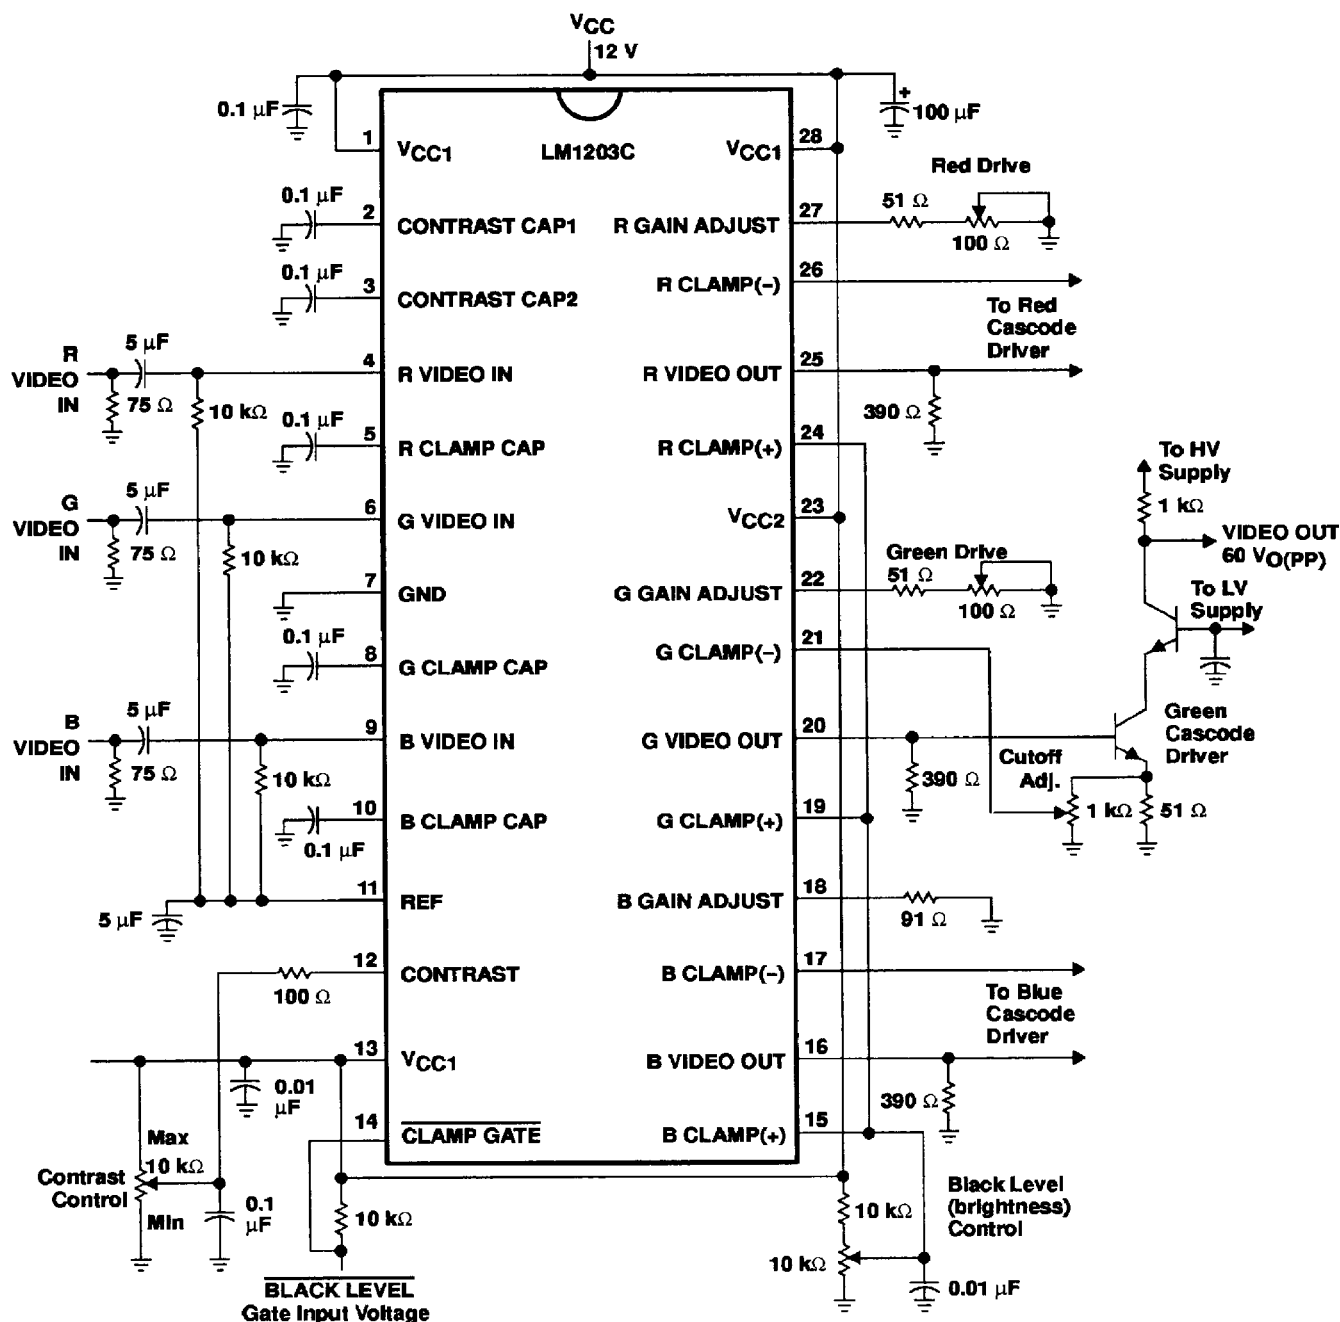

- NOTES: A. For optimal performance, Texas Instruments recommends the exact values shown for the components represented in this circuit schematic.
- B. For optimized video-board design, discrete capacitors at CONTRAST CAP1 and CONTRAST CAP2 connected to ground can be eliminated, depending on individual requirements for noise reduction.

Figure 2. Typical Application



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

8961724 0101226 670

# LM1203C RGB VIDEO-AMPLIFIER SYSTEM

SLVS099B – NOVEMBER 1994 – REVISED FEBRUARY 1996

## APPLICATION INFORMATION

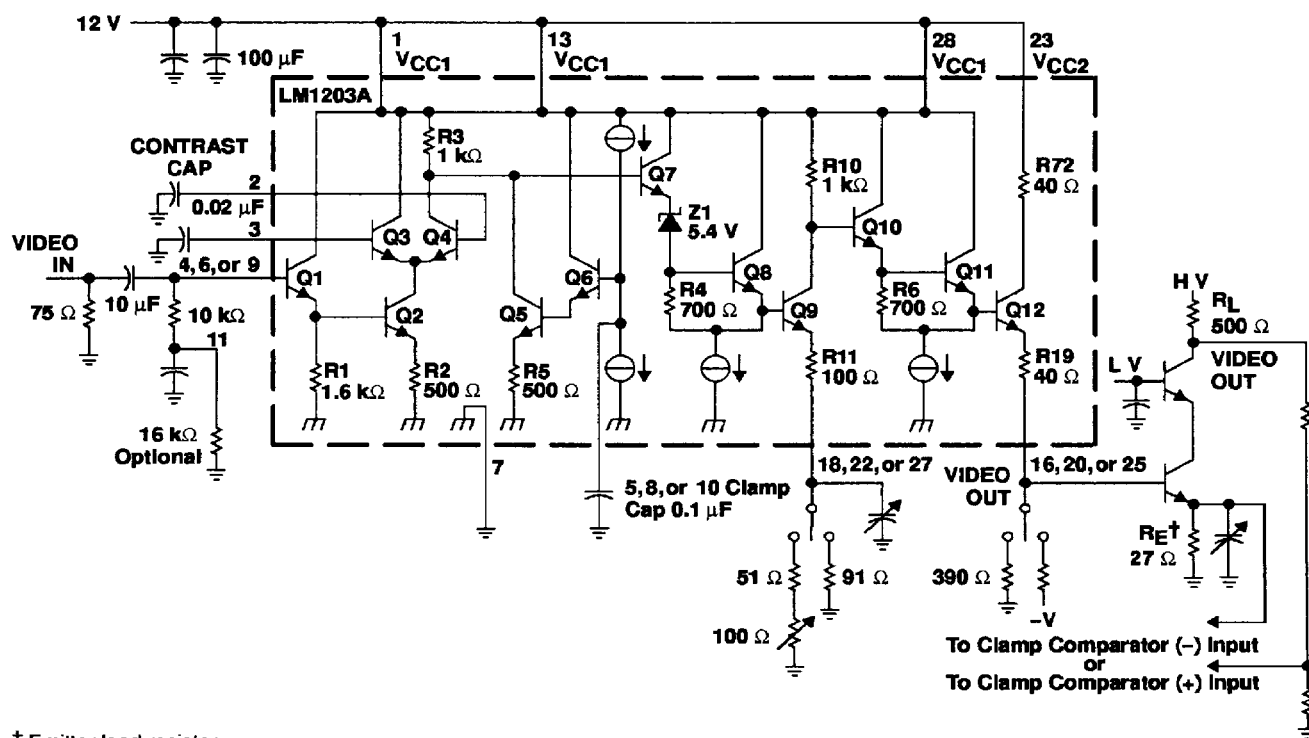


Figure 3. Simplified Video-Amplifier Section With Recommended External Components

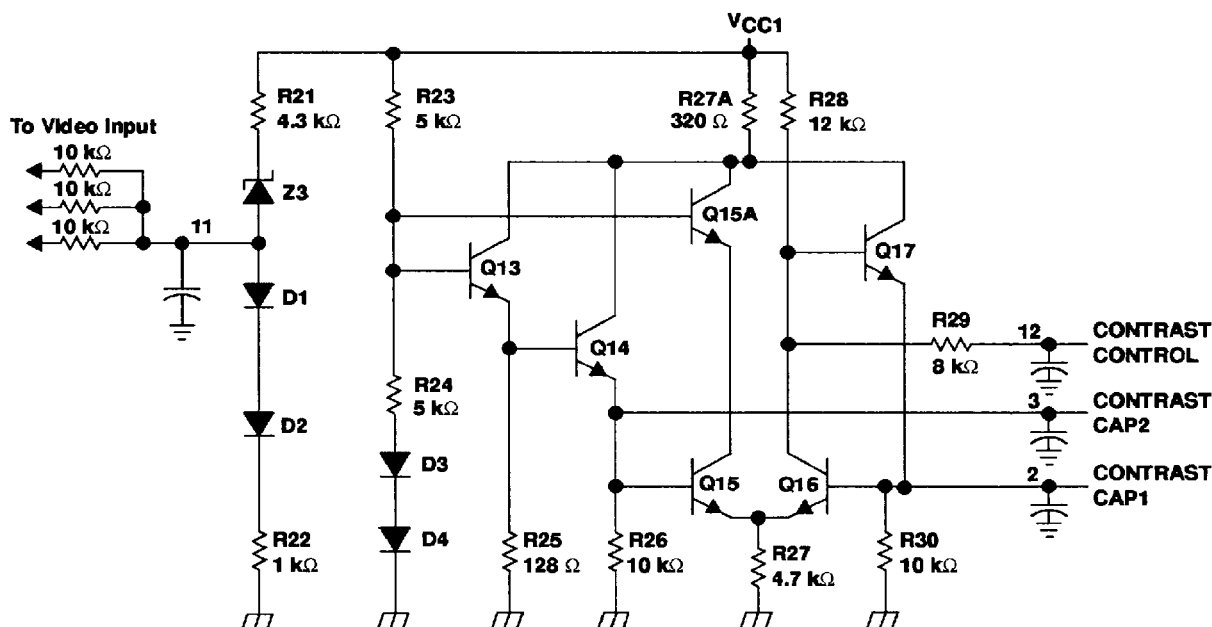


Figure 4. Input Voltage Reference and Contrast Control Circuits



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

8961724 0101227 507

APPLICATION INFORMATION

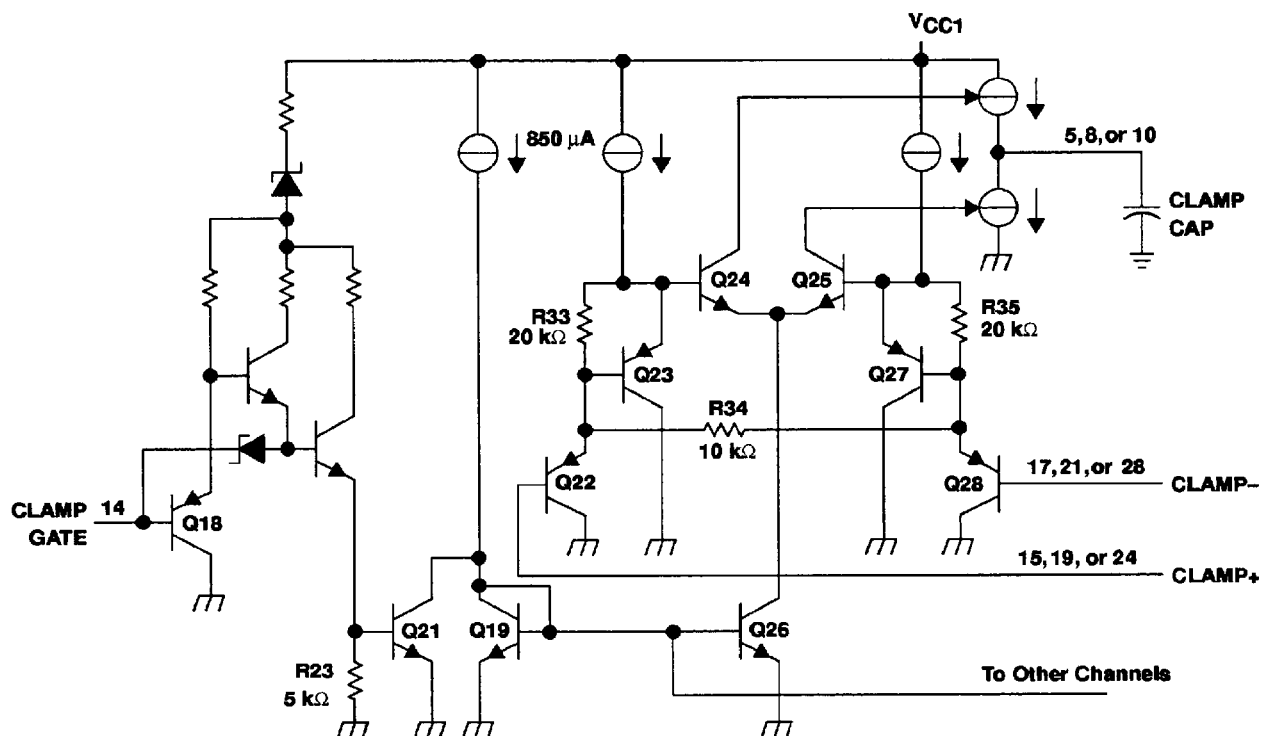


Figure 5. Simplified Schematic of Clamp-Gate  
(Common to Each Channel) and Clamp-Comparator Circuits



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443