



CD4008BM/CD4008BC 4-Bit Full Adder

General Description


The CD4008B types consist of four full-adder stages with fast look-ahead carry provision from stage to stage. Circuitry is included to provide a fast "parallel-carry-out" bit to permit high-speed operation in arithmetic sections using several CD4008B's. CD4008B inputs include the four sets of bits to be added, A1 to A4 and B1 to B4, in addition to the "Carry in" bit from a previous section. CD4008B outputs include the four sum bits, S1 and S4, in addition to the high-speed "parallel-carry-out" which may be utilized at a succeeding CD4008B section.

All inputs are protected from damage due to static discharge by diode clamps to V_{DD} and GND.

Features


- Wide supply voltage range 3.0V to 15V
- High noise immunity 0.45 V_{CC} (typ.)
- Low power TTL compatibility fan out of 2 driving 74L or 1 driving 74LS
- 4 sum outputs plus parallel look-ahead carry-output
- Quiescent current specified to 15V
- Maximum input leakage of $1\mu A$ at 15V (full package temperature range)

Block Diagram

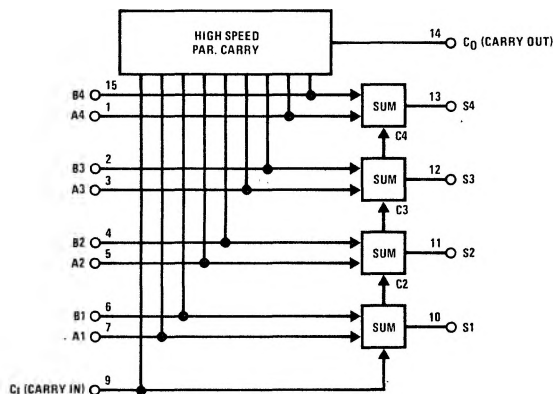

Connection Diagram

Dual-In-Line and Flat Package



Truth Table

A_i	B_i	C_i	C_0	SUM
0	0	0	0	0
1	0	0	0	1
0	1	0	0	1
1	1	0	1	0
0	0	1	0	1
1	0	1	1	0
0	1	1	1	0
1	1	1	1	1

Absolute Maximum Ratings

(Notes 1 and 2)

V _{DD} dc Supply Voltage	-0.5 to +18 V _{DC}
V _{IN} Input Voltage	-0.5 to V _{DD} +0.5 V _{DC}
T _S Storage Temperature Range	-65°C to +150°C
P _D Package Dissipation	500 mW
T _L Lead Temperature (Soldering, 10 seconds)	300°C

Recommended Operating Conditions

(Note 2)

V _{DD} dc Supply Voltage	3 to 15 V _{DC}
V _{IN} Input Voltage	0 to V _{DD} V _{DC}
T _A Operating Temperature Range	-55°C to +125°C
CD4008BM	-40°C to +85°C
CD4008BC	

DC Electrical Characteristics 4008BM (Note 2)

PARAMETER	CONDITIONS	-55°C		25°C			125°C		UNITS
		MIN	MAX	MIN	TYP	MAX	MIN	MAX	
I _{DD} Quiescent Device Current	V _{DD} = 5V		5		0.3	5		150	μA
	V _{DD} = 10V		10		0.5	10		300	μA
	V _{DD} = 15V		20		1.0	20		600	μA
V _{OL} Low Level Output Voltage	I _O < 1μA								
	V _{DD} = 5V		0.05		0	0.05		0.05	V
	V _{DD} = 10V		0.05		0	0.05		0.05	V
V _{OH} High Level Output Voltage	I _O < 1μA								
	V _{DD} = 5V	4.95		4.95	5		4.95		V
	V _{DD} = 10V	9.95		9.95	10		9.95		V
V _{IL} Low Level Input Voltage	I _O < 1μA								
	V _{DD} = 5V, V _O = 0.5V or 4.5V		1.5			1.5		1.5	V
	V _{DD} = 10V, V _O = 1V or 9V		3.0			3.0		3.0	V
V _{IH} High Level Input Voltage	I _O < 1μA								
	V _{DD} = 5V, V _O = 0.5V or 4.5V	3.5		3.5			3.5		V
	V _{DD} = 10V, V _O = 1V or 9V	7.0		7.0			7.0		V
I _{OL} Low Level Output Current	V _{DD} = 5V, V _O = 0.4V	0.64		0.51	0.88		0.36		mA
	V _{DD} = 10V, V _O = 0.5V	1.6		1.3	2.25		0.9		mA
	V _{DD} = 15V, V _O = 1.5V	4.2		3.4	8.8		2.4		mA
I _{OH} High Level Output Current	V _{DD} = 5V, V _O = 4.6V	-0.25		-0.2	-0.35		-0.14		mA
	V _{DD} = 10V, V _O = 9.5V	-0.62		-0.5	-0.8		-0.35		mA
	V _{DD} = 15V, V _O = 13.5V	-1.8		-1.5	-3.5		-1.1		mA
I _{IN} Input Current	V _{DD} = 15V, V _{IN} = 0V		-0.1		-10 ⁻⁵	-0.1		-1.0	μA
	V _{DD} = 15V, V _{IN} = 15V		0.1		10 ⁻⁵	0.1		1.0	μA

DC Electrical Characteristics 4008BC (Note 2)

PARAMETER	CONDITIONS	-40°C		25°C			85°C		UNITS
		MIN	MAX	MIN	TYP	MAX	MIN	MAX	
I _{DD} Quiescent Device Current	V _{DD} = 5V		20		0.5	20		150	μA
	V _{DD} = 10V		40		1	40		300	μA
	V _{DD} = 15V		80		5	80		600	μA
V _{OL} Low Level Output Voltage	I _O < 1μA								
	V _{DD} = 5V		0.05		0	0.05		0.05	V
	V _{DD} = 10V		0.05		0	0.05		0.05	V
V _{OH} High Level Output Voltage	I _O < 1μA								
	V _{DD} = 5V	4.95		4.95	5		4.95		V
	V _{DD} = 10V	9.95		9.95	10		9.95		V
V _{IL} Low Level Input Voltage	I _O < 1μA								
	V _{DD} = 5V, V _O = 0.5V or 4.5V		1.5			1.5		1.5	V
	V _{DD} = 10V, V _O = 1V or 9V		3.0			3.0		3.0	V
V _{IH} High Level Input Voltage	I _O < 1μA								
	V _{DD} = 5V, V _O = 0.5V or 4.5V	3.5		3.5			3.5		V
	V _{DD} = 10V, V _O = 1V or 9V	7.0		7.0			7.0		V
I _{OL} Low Level Output Current	V _{DD} = 5V, V _O = 0.4V	0.64		0.51	0.88		0.36		mA
	V _{DD} = 10V, V _O = 0.5V	1.6		1.3	2.25		0.9		mA
	V _{DD} = 15V, V _O = 1.5V	4.2		3.4	8.8		2.4		mA
I _{OH} High Level Output Current	V _{DD} = 5V, V _O = 4.6V	-0.25		-0.2	-0.35		-0.14		mA
	V _{DD} = 10V, V _O = 9.5V	-0.62		-0.5	-0.8		-0.35		mA
	V _{DD} = 15V, V _O = 13.5V	-1.8		-1.5	-3.5		-1.1		mA
I _{IN} Input Current	V _{DD} = 15V, V _{IN} = 0V		-0.1		-10 ⁻⁵	-0.1		-1.0	μA
	V _{DD} = 15V, V _{IN} = 15V		0.1		10 ⁻⁵	0.1		1.0	μA

DC Electrical Characteristics (Cont'd) CD4008BC (Note 2)

PARAMETER	CONDITIONS	-40°C		25°C			85°C		UNITS
		MIN	MAX	MIN	TYP	MAX	MIN	MAX	
I_{OL} Low Level Output Current	$V_{DD} = 5V, V_O = 0.4V$	0.52		0.44	0.88		0.36		mA
	$V_{DD} = 10V, V_O = 0.5V$	1.3		1.1	2.25		0.9		mA
	$V_{DD} = 15V, V_O = 1.5V$	3.6		3.0	8.8		2.4		mA
I_{OH} High Level Output Current	$V_{DD} = 5V; V_O = 4.6V$	-0.2		-0.16	-0.35		-0.12		mA
	$V_{DD} = 10V, V_O = 9.5V$	-0.5		-0.4	-0.8		-0.3		mA
	$V_{DD} = 15V, V_O = 13.5V$	-1.4		-1.2	-3.5		-1.0		mA
I_{IN} Input Current	$V_{DD} = 15V, V_{IN} = 0V$		-0.3			-0.3		-1.0	μA
	$V_{DD} = 15V, V_{IN} = 15V$		0.3			0.3		1.0	μA

AC Electrical Characteristics $T_A = 25^\circ C, C_L = 50 \text{ pF}, R_L = 2000 \text{ k},$ input $t_r, t_f = 20 \text{ ns}$, unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
t_{PHL} or t_{PLH} Propagation Delay Time Sum In to Sum Out	$V_{DD} = 5V$		425	750	ns
	$V_{DD} = 10V$		170	250	ns
	$V_{DD} = 15V$		125	190	ns
	$V_{DD} = 5V$		320	650	ns
	$V_{DD} = 10V$		125	225	ns
	$V_{DD} = 15V$		95	175	ns
	$V_{DD} = 5V$		250	500	ns
	$V_{DD} = 10V$		115	200	ns
	$V_{DD} = 15V$		90	160	ns
	$V_{DD} = 5V$		130	245	ns
	$V_{DD} = 10V$		60	105	ns
	$V_{DD} = 15V$		45	80	ns
	$V_{DD} = 5V$		100	175	ns
	$V_{DD} = 10V$		45	75	ns
	$V_{DD} = 15V$		35	60	ns
	$V_{DD} = 5V$		100	200	ns
	$V_{DD} = 10V$		50	100	ns
	$V_{DD} = 15V$		40	80	ns
t_{THL} High-to-Low Transition Time	$V_{DD} = 5V$		100	200	ns
	$V_{DD} = 10V$		50	100	ns
	$V_{DD} = 15V$		40	80	ns
t_{TLH} Low-to-High Transition Time	$V_{DD} = 5V$		200	400	ns
	$V_{DD} = 10V$		100	200	ns
	$V_{DD} = 15V$		80	160	ns
C_{IN} Average Input Capacitance			5	7.5	pF
C_{PD} Power Dissipation Capacitance	Note 3		100		pF

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

Note 3: C_{PD} determines the no load ac power consumption of any CMOS device. For complete explanation, see 54C/74C Family Characteristics application note, AN-90.

AC Test Circuit and Switching Time Waveforms