



CD4047BM/CD4047BC Low Power Monostable/Astable Multivibrator

General Description

CD4047B is capable of operating in either the monostable or astable mode. It requires an external capacitor (between pins 1 and 3) and an external resistor (between pins 2 and 3) to determine the output pulse width in the monostable mode, and the output frequency in the astable mode.

Astable operation is enabled by a high level on the astable input or low level on the astable input. The output frequency (at 50% duty cycle) at Q and $\bar{Q}$ outputs is determined by the timing components. A frequency twice that of Q is available at the Oscillator Output; a 50% duty cycle is not guaranteed.

Monostable operation is obtained when the device is triggered by low-to-high transition at + trigger input or high-to-low transition at - trigger input. The device can be retriggered by applying a simultaneous low-to-high transition to both the + trigger and retrigger inputs.

A high level on Reset input resets the outputs Q to low, $\bar{Q}$ to high.

Features

- Wide supply voltage range 3.0V to 15V
- High noise immunity $0.45 V_{DD}$ (typ.)
- Low power TTL compatibility fan out of 2 driving 74L or 1 driving 74LS

SPECIAL FEATURES

- Low power consumption: special CMOS oscillator configuration
- Monostable (one-shot) or astable (free-running) operation
- True and complemented buffered outputs
- Only one external R and C required

MONOSTABLE MULTIVIBRATOR FEATURES

- Positive- or negative-edge trigger
- Output pulse width independent of trigger pulse duration
- Retriggerable option for pulse width expansion
- Long pulse widths possible using small RC components by means of external counter provision
- Fast recovery time essentially independent of pulse width
- Pulse-width accuracy maintained at duty cycles approaching 100%


ASTABLE MULTIVIBRATOR FEATURES

- Free-running or gatable operating modes
- 50% duty cycle
- Oscillator output available
- Good astable frequency stability
 - typical $= \pm 2\% + 0.03\%/^{\circ}\text{C}$ @ 100 kHz
 - frequency $= \pm 0.5\% + 0.015\%/^{\circ}\text{C}$ @ 10 kHz
 - deviation (circuits trimmed to frequency $V_{DD} = 10\text{V} \pm 10\%$)


Applications

- Frequency discriminators
- Timing circuits
- Time-delay applications
- Envelope detection
- Frequency multiplication
- Frequency division

Block and Connection Diagrams

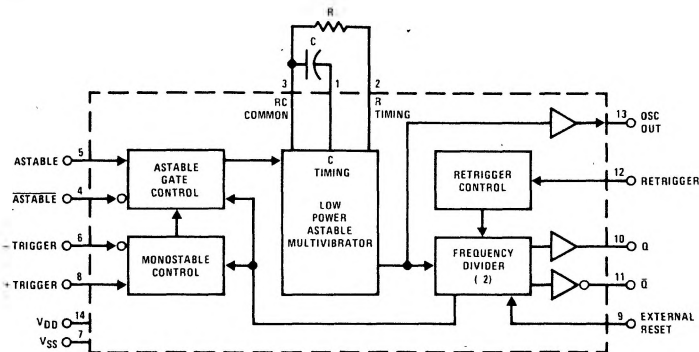

Dual-In-Line and Flat Package



Absolute Maximum Ratings

(Notes 1 and 2)

V_{DD} dc Supply Voltage	-0.5 to +18V _{DC}
V_{IN} Input Voltage	-0.5 to $V_{DD} + 0.5V_{DC}$
T_S Storage Temperature Range	-65°C to +150°C
P_D Package Dissipation	500 mW
T_L Lead Temperature (Soldering, 10 seconds)	300°C

Recommended Operating Conditions

(Note 2)

V_{DD} dc Supply Voltage	3 to 15V _{DC}
V_{IN} Input Voltage	0 to $V_{DD}V_{DC}$
T_A Operating Temperature Range	-55°C to +125°C
CD4047BM	-40°C to +85°C
CD4047BC	

DC Electrical Characteristics CD4047BM (Note 2)

PARAMETER	CONDITIONS	-55°C		25°C			125°C		UNITS
		MIN	MAX	MIN	TYP	MAX	MIN	MAX	
I_{DD} Quiescent Device Current	$V_{DD} = 5V$		5			5		150	μA
	$V_{DD} = 10V$		10			10		300	μA
	$V_{DD} = 15V$		20			20		600	μA
V_{OL} Low Level Output Voltage	$ I_O < 1 \mu A$								
	$V_{DD} = 5V$		0.05		0	0.05		0.05	V
	$V_{DD} = 10V$		0.05		0	0.05		0.05	V
V_{OH} High Level Output Voltage	$ I_O < 1 \mu A$								
	$V_{DD} = 5V$	4.95		4.95	5		4.95		V
	$V_{DD} = 10V$	9.95		9.95	10		9.95		V
V_{IL} Low Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or 4.5V		1.5		2.25	1.5		1.5	V
	$V_{DD} = 10V, V_O = 1V$ or 9V		3.0		4.5	3.0		3.0	V
	$V_{DD} = 15V, V_O = 1.5V$ or 13.5V		4.0		6.75	4.0		4.0	V
V_{IH} High Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or 4.5V	3.5		3.5	2.75		3.5		V
	$V_{DD} = 10V, V_O = 1V$ or 9V	7.0		7.0	5.5		7.0		V
	$V_{DD} = 15V, V_O = 1.5V$ or 13.5V	11.0		11.0	8.25		11.0		V
I_{OL} Low Level Output Current	$V_{DD} = 5V, V_O = 0.4V$	0.64		0.51	0.88		0.36		mA
	$V_{DD} = 10V, V_O = 0.5V$	1.6		1.3	2.25		0.9		mA
	$V_{DD} = 15V, V_O = 1.5V$	4.2		3.4	8.8		2.4		mA
I_{OH} High Level Output Current	$V_{DD} = 5V, V_O = 4.6V$	-0.64		-0.51	-0.88		-0.36		mA
	$V_{DD} = 10V, V_O = 9.5V$	-1.6		-1.3	-2.25		-0.9		mA
	$V_{DD} = 15V, V_O = 13.5V$	-4.2		-3.4	-8.8		-2.4		mA
I_{IN} Input Current	$V_{DD} = 15V, V_{IN} = 0V$		-0.1		-10^{-5}	-0.1		-1.0	μA
	$V_{DD} = 15V, V_{IN} = 15V$		0.1		10^{-5}	0.1		1.0	μA

DC Electrical Characteristics CD4047BC (Note 2)

PARAMETER	CONDITIONS	-40°C		25°C			85°C		UNITS
		MIN	MAX	MIN	TYP	MAX	MIN	MAX	
I_{DD} Quiescent Device Current	$V_{DD} = 5V$		20			20		150	μA
	$V_{DD} = 10V$		40			40		300	μA
	$V_{DD} = 15V$		80			80		600	μA
V_{OL} Low Level Output Voltage	$ I_O < 1 \mu A$								
	$V_{DD} = 5V$		0.05		0	0.05		0.05	V
	$V_{DD} = 10V$		0.05		0	0.05		0.05	V
V_{OH} High Level Output Voltage	$ I_O < 1 \mu A$								
	$V_{DD} = 5V$		0.05		0	0.05		0.05	V
	$V_{DD} = 10V$		0.05		0	0.05		0.05	V
V_{IL} Low Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or 4.5V		1.5		2.25	1.5		1.5	V
	$V_{DD} = 10V, V_O = 1V$ or 9V		3.0		4.5	3.0		3.0	V
	$V_{DD} = 15V, V_O = 1.5V$ or 13.5V		4.0		6.75	4.0		4.0	V
V_{IH} High Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or 4.5V	3.5		3.5	2.75		3.5		V
	$V_{DD} = 10V, V_O = 1V$ or 9V	7.0		7.0	5.5		7.0		V
	$V_{DD} = 15V, V_O = 1.5V$ or 13.5V	11.0		11.0	8.25		11.0		V
I_{OL} Low Level Output Current	$V_{DD} = 5V, V_O = 0.4V$	0.64		0.51	0.88		0.36		mA
	$V_{DD} = 10V, V_O = 0.5V$	1.6		1.3	2.25		0.9		mA
	$V_{DD} = 15V, V_O = 1.5V$	4.2		3.4	8.8		2.4		mA
I_{OH} High Level Output Current	$V_{DD} = 5V, V_O = 4.6V$	-0.64		-0.51	-0.88		-0.36		mA
	$V_{DD} = 10V, V_O = 9.5V$	-1.6		-1.3	-2.25		-0.9		mA
	$V_{DD} = 15V, V_O = 13.5V$	-4.2		-3.4	-8.8		-2.4		mA
I_{IN} Input Current	$V_{DD} = 15V, V_{IN} = 0V$		-0.1		-10^{-5}	-0.1		-1.0	μA
	$V_{DD} = 15V, V_{IN} = 15V$		0.1		10^{-5}	0.1		1.0	μA

DC Electrical Characteristics (Cont'd.) CD4047BC (Note 2)

PARAMETER	CONDITIONS	-40°C		25°C			85°C		UNITS
		MIN	MAX	MIN	TYP	MAX	MIN	MAX	
V _{OH} High Level Output Voltage	$I_{O1} < 1 \mu A$ V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		V V V
V _{IL} Low Level Input Voltage	V _{DD} = 5V, V _O = 0.5V or 4.5V V _{DD} = 10V, V _O = 1V or 9V V _{DD} = 15V, V _O = 1.5V or 13.5V		1.5 3.0 4.0		2.25 4.5 6.75	1.5 3.0 4.0		1.5 3.0 4.0	V V V
V _{IH} High Level Input Voltage	V _{DD} = 5V, V _O = 0.5V or 4.5V V _{DD} = 10V, V _O = 1V or 9V V _{DD} = 15V, V _O = 1.5V or 13.5V	3.5 7.0 11.0		3.5 7.0 11.0	2.75 5.5 8.25		3.5 7.0 11.0		V V V
I _{OL} Low Level Output Current	V _{DD} = 5V, V _O = 0.4V V _{DD} = 10V, V _O = 0.5V V _{DD} = 15V, V _O = 1.5V	0.52 1.3 3.6		0.44 1.1 3.0	0.88 2.25 8.8		0.36 0.9 2.4		mA mA mA
I _{OH} High Level Output Current	V _{DD} = 5V, V _O = 4.6V V _{DD} = 10V, V _O = 9.5V V _{DD} = 15V, V _O = 13.5V	-0.52 -1.3 -3.6		-0.44 -1.1 -3.0	-0.88 -2.25 -8.8		-0.36 -0.9 -2.4		mA mA mA
I _{IN} Input Current	V _{DD} = 15V, V _{IN} = 0V V _{DD} = 15V, V _{IN} = 15V		-0.3 0.3		-10 ⁻⁵ 10 ⁻⁵	-0.3 0.3		-1.0 1.0	μA μA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed, they are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.


Note 2: V_{SS} = 0V unless otherwise specified.

AC Electrical Characteristics CD4047B

T_A = 25°C, C_L = 50 pF, R_L = 200k, Input t_r = t_f = 20 ns, unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
t _{PHL} , t _{PLH} Propagation Delay Time Astable, Astable to Osc Out	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		200 100 80	400 200 160	ns ns ns
t _{PHL} , t _{PLH} Astable, Astable to Q, $\bar{Q}$	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		550 250 200	900 500 400	ns ns ns
t _{PHL} , t _{PLH} + Trigger, - Trigger to Q, $\bar{Q}$	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		700 300 240	1200 600 480	ns ns ns
t _{PHL} , t _{PLH} + Trigger, Retrigger to Q, $\bar{Q}$	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		300 175 150	600 300 250	ns ns ns
t _{PHL} , t _{PLH} Reset to Q, $\bar{Q}$	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		300 125 100	600 250 200	ns ns ns
t _{THL} , t _{TLH} Transition Time Q, $\bar{Q}$, Osc Out	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		100 50 40	200 100 80	ns ns ns
t _{WL} , t _{WH} Minimum Input Pulse Duration	Any Input V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		500 200 160	1000 400 320	ns ns ns
t _{RCL} , t _{FCL} + Trigger, Retrigger, Rise and Fall Time	V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V			15 5 5	μs μs μs
C _{IN} Average Input Capacitance	Any Input		5	7.5	pF

Logic Diagram

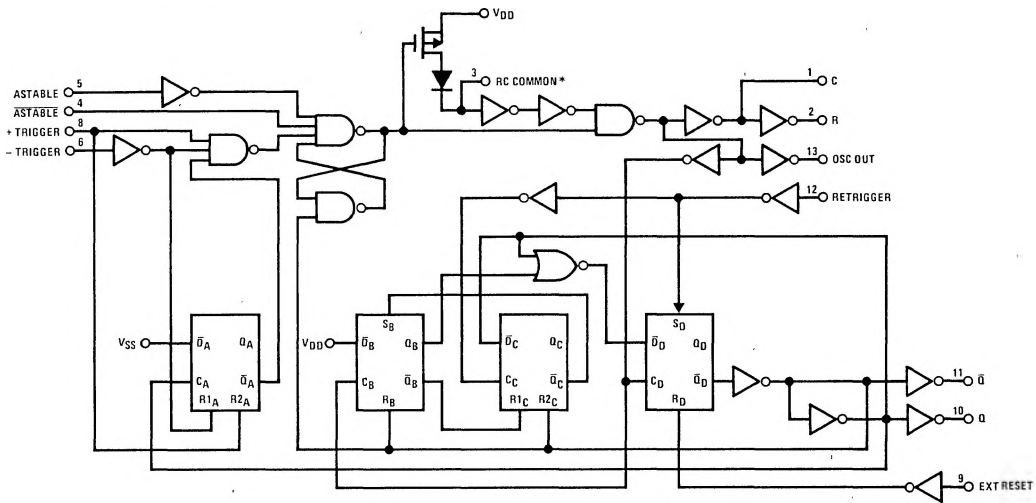


*Special input protection circuit to permit larger input-voltage swings

Truth Table

FUNCTION	TERMINAL CONNECTIONS			OUTPUT PULSE FROM	TYPICAL OUTPUT PERIOD OR PULSE WIDTH
	TO VDD	TO VSS	INPUT PULSE TO		
Astable Multivibrator					
Free-Running	4, 5, 6, 14	7, 8, 9, 12		10, 11, 13	$t_A(10, 11) = 4.40 RC$
True Gating	4, 6, 14	7, 8, 9, 12	5	10, 11, 13	
Complement Gating	6, 14	5, 7, 8, 9, 12	4	10, 11, 13	$t_A(13) = 2.20 RC$
Monostable Multivibrator					
Positive-Edge Trigger	4, 14	5, 6, 7, 9, 12	8	10, 11	
Negative-Edge Trigger	4, 8, 14	5, 7, 9, 12	6	10, 11	
Retriggerable	4, 14	5, 6, 7, 9	8, 12	10, 11	$t_M(10, 11) = 2.48 RC$
External Countdown*	14	5, 6, 7, 8, 9, 12	(See Figure)	(See Figure)	(See Figure)

Note: External resistor between terminals 2 and 3. External capacitor between terminals 1 and 3.


* Typical Implementation of External Countdown Option

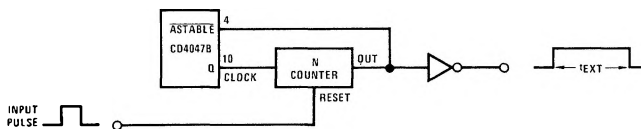

$$t_{EXT} = (N - 1) t_A + (t_M + t_A/2)$$


Typical Performance Characteristics

Typical Q, $\bar{Q}$, Osc Out Period Accuracy vs Supply Voltage (Astable Mode Operation)




$f_Q, \bar{Q}$	R	C
A 1000 kHz	22k	10 pF
B 100 kHz	22k	100 pF
C 10 kHz	220k	100 pF
D 1 kHz	220k	1000 pF
E 100 Hz	2.2M	1000 pF

Typical Q, $\bar{Q}$, Pulse Width Accuracy vs Supply Voltage Monostable Mode Operation




t_M	R	C
A 2 μs	22k	10 pF
B 7 μs	22k	100 pF
C 60 μs	220k	100 pF
D 550 μs	220k	1000 pF
E 5.5 ms	2.2M	1000 pF

Typical Q, $\bar{Q}$ and Osc Out Period Accuracy vs Temperature Astable Mode Operation



$f_Q, \bar{Q}$	R	C
A 1000 kHz	22k	10 pF
B 100 kHz	22k	100 pF
C 10 kHz	220k	100 pF
D 1 kHz	220k	1000 pF

Typical Q and $\bar{Q}$ Pulse Width Accuracy vs Temperature Monostable Mode Operation



t_M	R	C
A 2 μs	22k	10 pF
B 7 μs	22k	100 pF
C 60 μs	220k	100 pF
D 550 μs	220k	1000 pF

Timing Diagram

