

CLC952

CLC952 12-Bit, 41MSPS Monolithic A/D Converter



Literature Number: SNOS867A

CLC952 12-bit, 41MSPS Monolithic A/D Converter

General Description

The CLC952 is a complete monolithic 12-bit 41MSPS analog-to-digital converter system. Fabricated from a 0.8 μ m BiCMOS process, the CLC952's on-chip features include a very linear wideband track-and-hold, bandgap voltage reference and a proprietary 12-bit multi-stage quantizer. The CLC952 has been designed for wideband digital communications receivers and features a 72dBc spurious-free dynamic range (SFDR) and 64dB signal-to-noise ratio (SNR).


The CLC952 operates from a standard ± 5 V power supply and features excellent noise isolation with its >60dB power-supply rejection ratio (PSRR). All digital control functions and output registers are TTL compatible. The CLC952AC operates over the commercial temperature range (0°C to 70°C), and the CLC952AJ operates over the industrial temperature range (-40°C to 85°C) version. The CLC952 is available in a 28-pin SSOP that provides an extremely small footprint for reduced board space. National Semiconductor thoroughly tests each part to verify full compliance with guaranteed specifications.

Features

- 41MSPS
- Wide dynamic range
SFDR: 72dBc
SNR: 64dB
- Low power dissipation: 660mW
- Ground centered,
DC-coupled analog input
- Excellent PSRR: >60dB
- Very small package: 28-pin SSOP
- Low cost

Applications

- Cellular base-stations
- Digital communications
- Infrared/CCD imaging
- IF sampling
- Electro-optics
- Instrumentation
- Medical imaging
- High definition video

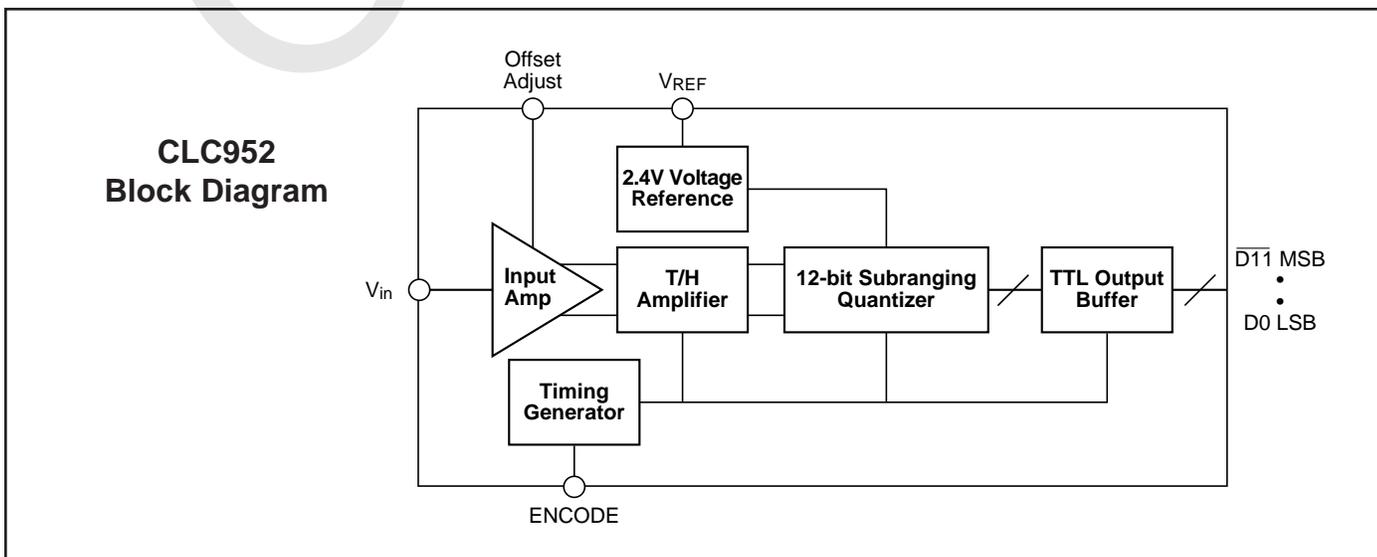

CLC952 Electrical Characteristics (V_{CC} = +5V, V_{EE} = -5V, 40.96MSPS; unless specified)

PARAMETERS	CONDITIONS	TEMP	RATINGS			UNITS	NOTES
			MIN	TYP	MAX		
		Note 4					
DYNAMIC PERFORMANCE							
small-signal bandwidth	V _{in} = 1/4FS	+25°C		185		MHz	
large-signal bandwidth	V _{in} = FS	+25°C		180		MHz	
slew rate		+25°C		357		V/μs	
overvoltage recovery time	V _{in} = 1.5FS (0.01%)	+25°C		5		ns	
effective aperture delay		+25°C		1.6		ns	
aperture jitter		+25°C		4		ps(rms)	
NOISE AND DISTORTION (40.96MSPS)							
signal-to-noise ratio (w/o harmonics)							
2.0MHz	FS	+25°C	60	64		dB	1
	FS	Full		61		dB	
9.67MHz	FS	+25°C	60	64		dB	1
	FS	Full		61		dB	
19.5MHz	FS	+25°C	60	62		dB	1
	FS	Full		60		dB	
spurious-free dynamic range							
2.0MHz	FS-1dB	+25°C	64	72		dBc	1
	FS-1dB	Full		71		dBc	
9.67MHz	FS-1dB	+25°C	61	69		dBc	1
	FS-1dB	Full		68		dBc	
19.5MHz	FS-1dB	+25°C	60	67		dBc	1
	FS-1dB	Full		66		dBc	
intermodulation distortion							
19.49MHz (f ₁), 19.9MHz (f ₂)	FS-7dB	+25°C		75		dBFS	
DC ACCURACY AND PERFORMANCE							
differential non-linearity	DC; FS	+25°C		1.4		LSB	
integral non-linearity	DC; FS	+25°C		3.0		LSB	
bipolar offset error		+25°C		5.1		mV	
bipolar offset error		Full			25.0	mV	3
bipolar gain error		+25°C		-4.5		%FS	
bipolar gain error		Full			15.0	%FS	3
ANALOG INPUT AND PERFORMANCE							
analog input resistance		+25°C		500		Ω	
analog input capacitance		+25°C		2		pF	
DIGITAL INPUTS							
input voltage	logic LOW	Full			0.8	V	1,3
	logic HIGH	Full	2.0			V	1,3
input current	logic LOW	Full		0	5	μA	1,3
	logic HIGH	Full		4.0	25	μA	1,3
output voltage	logic LOW	Full			0.8	V	1,3
	logic HIGH	Full	2.4			V	1,3
TIMING							
maximum conversion rate		Full			40.96	MSPS	1,3
minimum conversion rate		Full		3.0		MSPS	3
pulse width high		Full		12.2	15	ns	3
pulse width low		Full	10.5	12.2		ns	3
pipeline delay		Full			1.0	clk cycle	3
output propagation delay		+25°C		15		ns	
POWER REQUIREMENTS							
+5V supply current	41MSPS	+25°C		54	70	mA	1
+5V supply current	41MSPS	Full			70	mA	3
-5V supply current	41MSPS	+25°C		78	100	mA	1
-5V supply current	41MSPS	Full			100	mA	3
nominal power dissipation	41MSPS	+25°C		660		mW	
V _{EE} power supply rejection ratio		+25°C		72		dB	
V _{CC} power supply rejection ratio		+25°C		60		dB	

Min/max ratings are based on product characterization and simulation. Individual parameters are tested as noted. Outgoing quality levels are determined from tested parameters.

Notes

- 1) These parameters are 100% tested at 25°C.
- 2) Typical specifications are the mean values of the distributions of deliverable converters tested to date.
- 3) Min/max data over temperature is based on the 5 sigma limit for deliverable converters tested to date.
- 4) Full temperature range is 0°C to +70°C for AC, -40°C to +85°C for AJ.

Absolute Maximum Ratings

positive supply voltage (V_{CC})	-0.5V to +6V
negative supply voltage (V_{EE})	+0.5V to -6V
differential voltage between any two grounds	<200mV
analog input voltage range	V_{EE} to V_{CC}
digital input voltage range	-0.5V to + V_{CC}
output short circuit duration (one-pin to ground)	infinite
junction temperature	175°C
storage temperature range	-65°C to 150°C
lead solder duration (+300°C)	10sec

Note: Absolute maximum ratings are limiting values, to be applied individually, and beyond which the serviceability of the circuit may be impaired. Functional operability under any of these conditions is not necessarily implied. Exposure to maximum ratings for extended periods may affect device reliability.

Recommended Operating Conditions

positive supply voltage (V_{CC})	+5V \pm 5%
negative supply voltage (V_{EE})	-5V \pm 5%
differential voltage between any two grounds	<10mV
analog input voltage range	\pm 0.5V
operating temperature range (AC)	0°C to +70°C
operating temperature range (AJ)	-40°C to +85°C

Package Thermal Resistance


Package	θ_{JA}	θ_{JC}
28-pin SSOP	80°C/W	32°C/W

Reliability Information

Transistor count	3000
------------------	------


Ordering Information

Model	Temperature Range	Description
CLC952ACMSA	0°C to +70°C	28-pin SSOP (commercial part)
CLC952AJMSA	-40°C to +85°C	28-pin SSOP (industrial part)
CLC952PCASM		Fully loaded evaluation board with CLC952 ... ready for test.

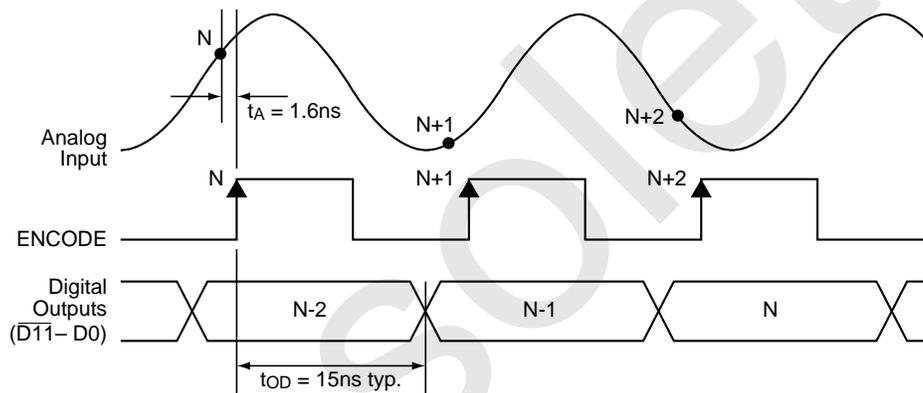


CLC952 Timing Diagram


Single Tone Output Spectrum

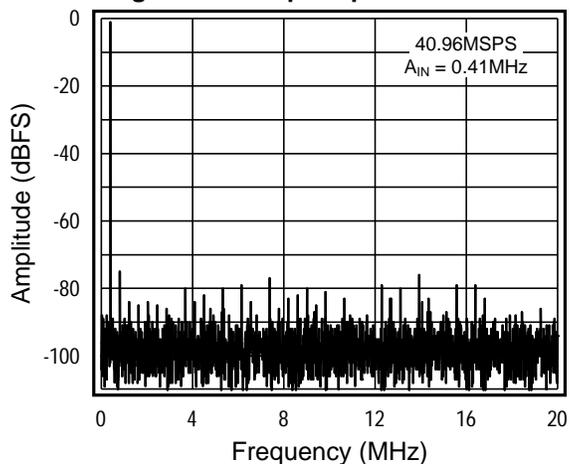


Single Tone Output Spectrum

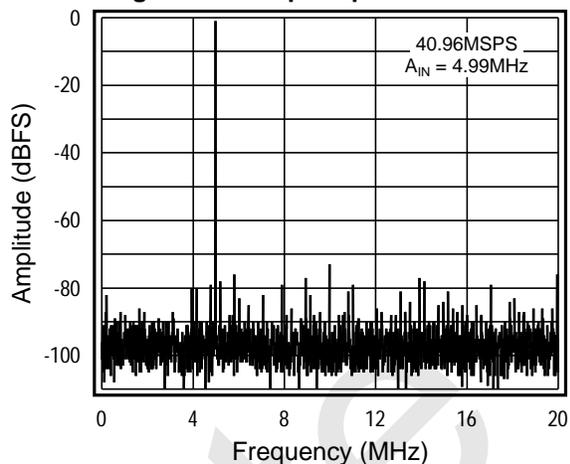


Single Tone Output Spectrum

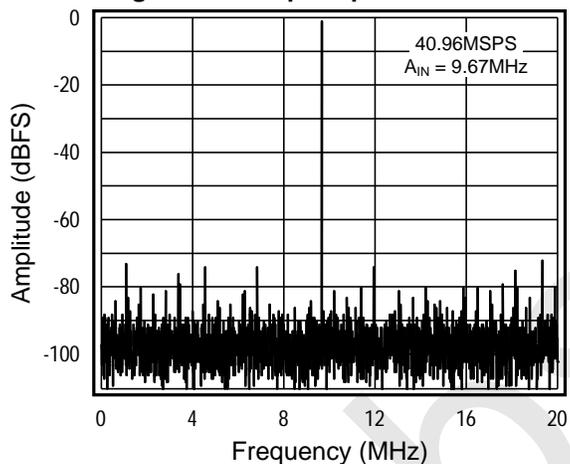


Single Tone Output Spectrum






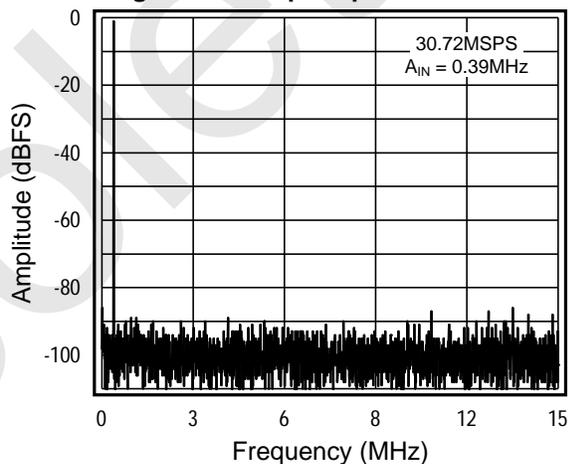


SFDR & SNR vs. Input Amplitude


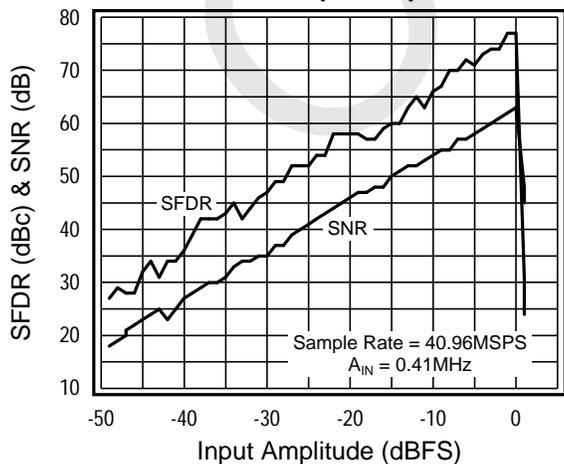


SFDR & SNR vs. Input Amplitude

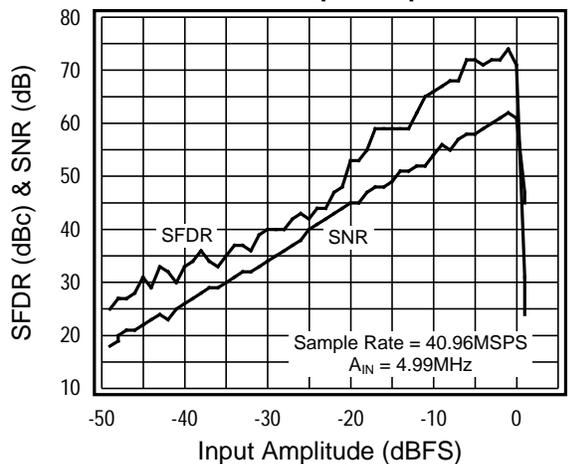


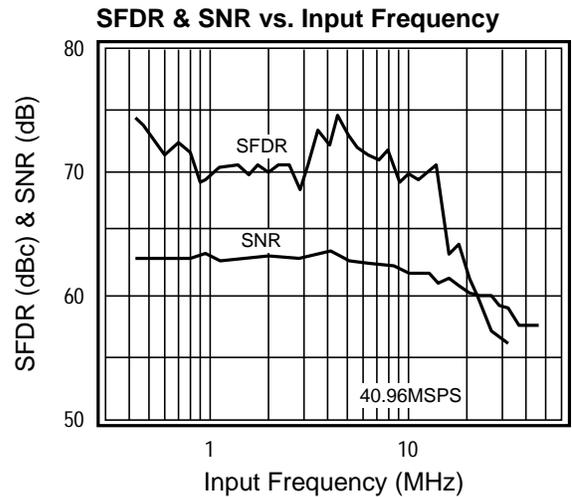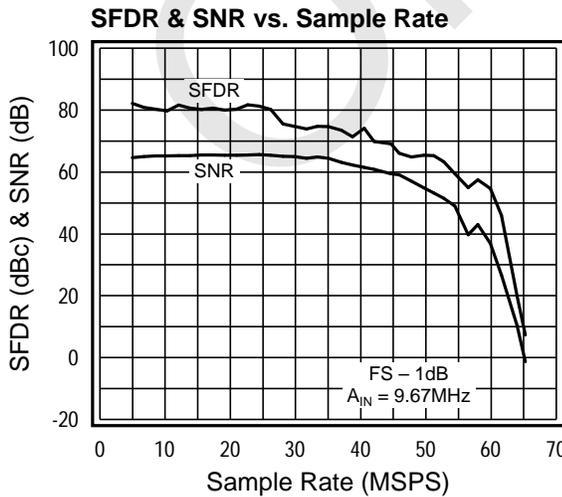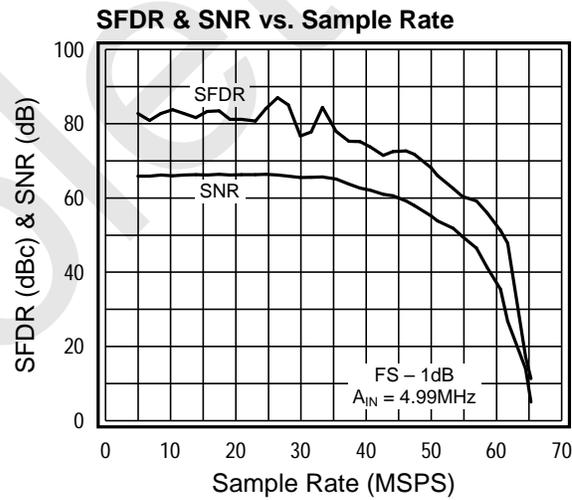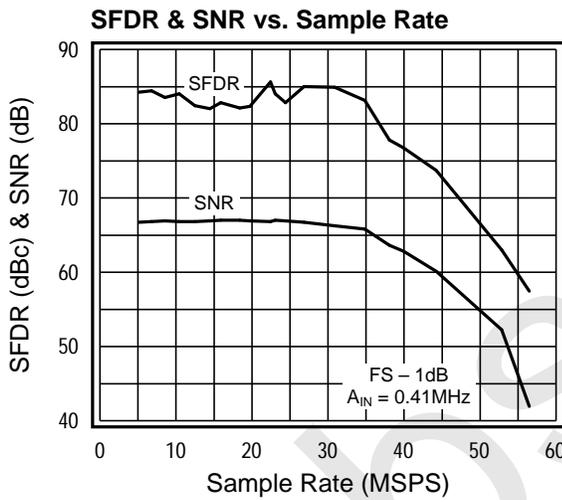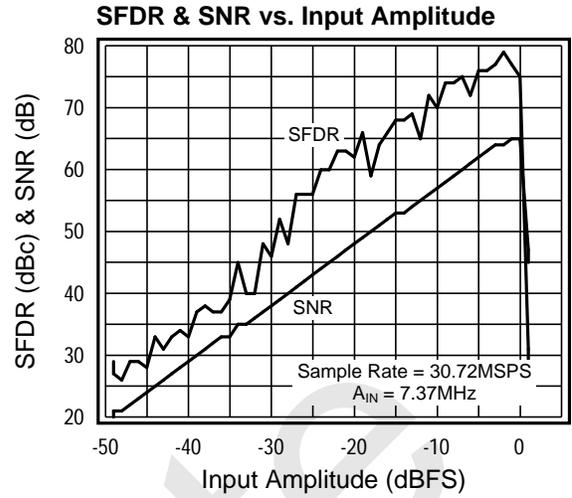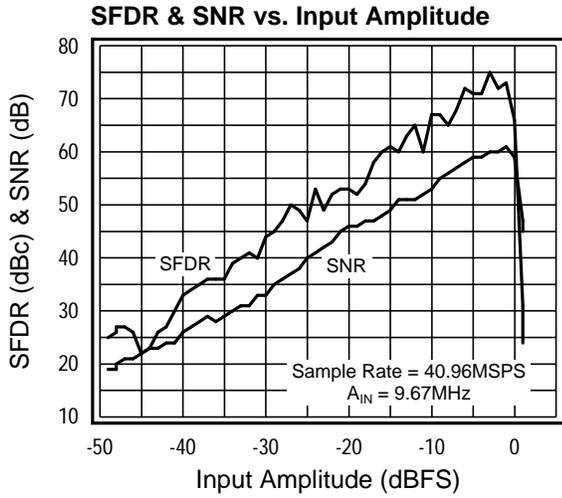

CLC952 Typical Performance Characteristics ($V_{CC} = +5V, V_{EE} = -5V$)

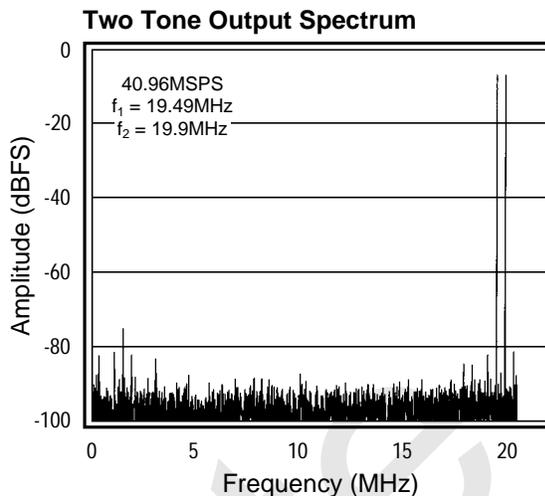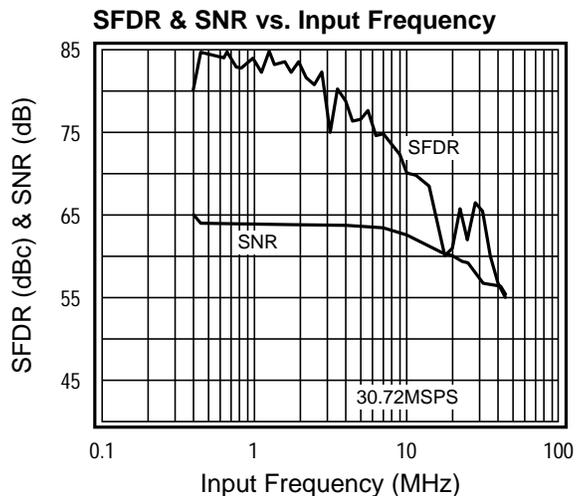

Physical Dimensions

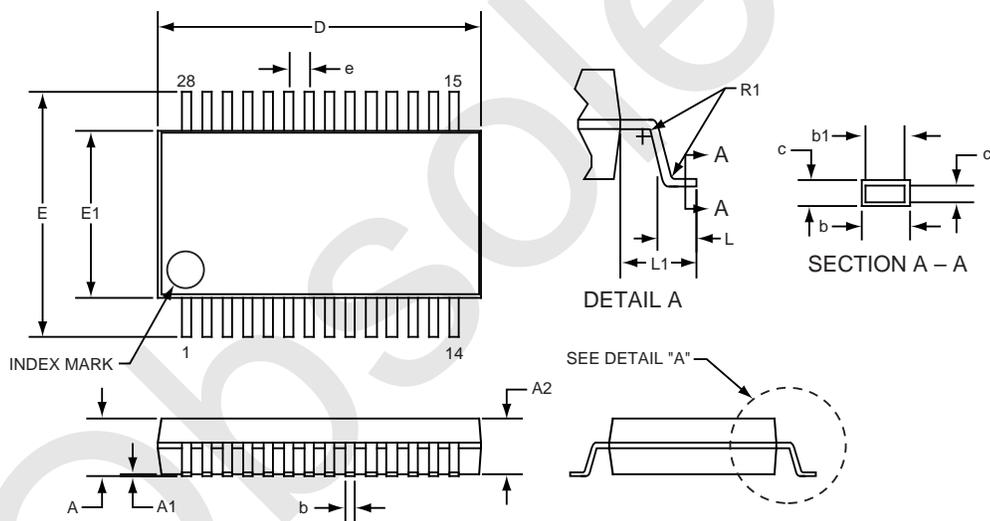


Symbol	Min	Max	Notes
A	1.73	2.00	
A1	0.00	0.21	
A2	1.65	1.85	
b	0.20	0.40	
b1	0.20	0.33	
c	0.10	0.22	
c1	0.10	0.18	
D	10.07	10.33	2
E	7.50	7.90	
E1	5.20	5.38	2
e	0.65 BSC		
L	0.52	0.95	
L1	1.25 REF		
R1	0.09		

Notes:

- All dimensions are in millimeters
- Dimensions D and E1 do not include mold protrusion. Allowable protrusion is 0.20mm per side.

CLC952 Pin Definitions

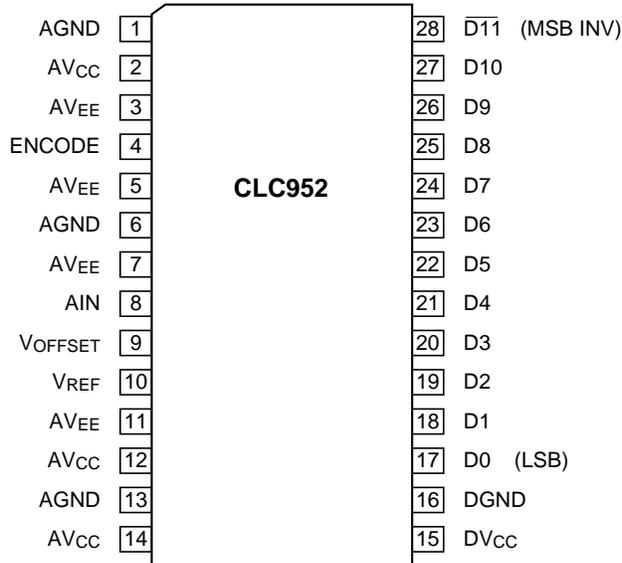

AGND (Pins 1, 6, 13) Analog circuit ground.

AV_{CC} (Pins 2, 12, 14) +5V power supply for the analog section. Bypass to analog ground with a 0.1μF capacitor.

AV_{EE} (Pins 3, 5, 7, 11) -5V power supply for the analog section. Bypass to analog ground with a 0.1μF capacitor.

ENCODE (Pin 4) ENCODE initiates a new data conversion cycle on each rising edge. Logic for this input is standard TTL. 50% duty cycle is recommended for full compliance with the guaranteed specifications.

AIN (Pin 8) Ground-centered, DC-coupled analog input with a 1V_{pp} maximum input range from -0.5V to +0.5V. Analog input impedance is approximately 500Ω.

V_{OFFSET} (Pin 9) Voltage offset control. Sets the midpoint of the analog input range. Normally left floating. Ratio of applied voltage to effective offset is 200:1. (1V applied to V_{OFFSET} produces 5mV midpoint offset.)

V_{REF} (Pin 10) Internal voltage reference. Nominally +2.4V. V_{REF} can be pulled up or down with a voltage source to program gain and input range. Bypass V_{REF} to ground with a 0.1μF capacitor.

DV_{CC} (Pin 15) +5V power supply for the digital section. Bypass to digital ground with a 0.1μF capacitor.

DGND (Pin 16) Digital ground.

D0-D11 (Pins 17-28) Digital data outputs are CMOS and TTL compatible. D0 is the LSB and D11 is the MSB. MSB is inverted. Output coding is two's complement.

Customer Design Applications Support

National Semiconductor is committed to design excellence. For sales, literature and technical support, call the National Semiconductor Customer Response Group at **1-800-272-9959** or fax **1-800-737-7018**.

Life Support Policy

National's products are not authorized for use as critical components in life support devices or systems without the express written approval of the president of National Semiconductor Corporation. As used herein:

1. Life support devices or systems are devices or systems which, a) are intended for surgical implant into the body, or b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation

1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe

Fax: (+49) 0-180-530 85 86
E-mail: europe.support.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Francais Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.

13th Floor, Straight Block
Ocean Centre, 5 Canton Road
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.

Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated