

DS7830

DS7830 Dual Differential Line Driver



Literature Number: SNLS360B

DS7830

Dual Differential Line Driver

General Description


The DS7830 is a dual differential line driver that also performs the dual four-input NAND or dual four-input AND function.

TTL (Transistor-Transistor-Logic) multiple emitter inputs allow this line driver to interface with standard TTL systems. The differential outputs are balanced and are designed to drive long lengths of coaxial cable, strip line, or twisted pair transmission lines with characteristic impedances of 50Ω to 500Ω . The differential feature of the output eliminates troublesome ground-loop errors normally associated with single-wire transmissions.

Features

- Single 5V power supply
- Diode protected outputs for termination of positive and negative voltage transients
- Diode protected inputs to prevent line ringing
- High speed
- Short circuit protection

Connection Diagram

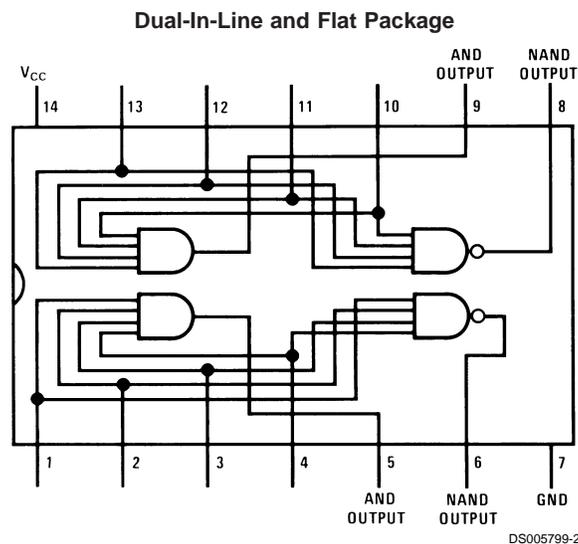

Top View

For Complete Military 883 Specifications, See RETS Data Sheet.
 Order Number DS7830J/883 or DS7830W/883
 See NS Package Number J14A

Absolute Maximum Ratings (Note 2)

Cavity Package

1308 mW

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Operating Conditions

| | |
|--|-----------------|
| V_{CC} | 7.0V |
| Input Voltage | 5.5V |
| Storage Temperature | -65°C to +150°C |
| Lead Temperature (Soldering, 4 sec.) | 260°C |
| Output Short Circuit Duration (125°C) | 1 second |
| Maximum Power Dissipation (Note 1) at 25°C | |

| | Min | Max | Units |
|-----------------------------|-----|------|-------|
| Supply Voltage (V_{CC}) | | | |
| DS7830 | 4.5 | 5.5 | V |
| Temperature (T_A) | | | |
| DS7830 | -55 | +125 | °C |

Note 1: Derate cavity package 8.7 mW/°C above 25°C; derate molded package 9.7 mW/°C above 25°C.

Electrical Characteristics (Notes 3, 4)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|----------|------------------------------|--|----------------------------|------|------|---------------|---|
| V_{IH} | Logical "1" Input Voltage | | 2.0 | | | V | |
| V_{IL} | Logical "0" Input Voltage | | | | 0.8 | V | |
| V_{OH} | Logical "1" Output Voltage | $V_{IN} = 0.8V$ | $I_{OUT} = -0.8\text{ mA}$ | 2.4 | | | V |
| | | | $I_{OUT} = 40\text{ mA}$ | 1.8 | 3.3 | | V |
| V_{OL} | Logical "0" Output Voltage | $V_{IN} = 2.0V$ | $I_{OUT} = 32\text{ mA}$ | | 0.2 | 0.4 | V |
| | | | $I_{OUT} = 40\text{ mA}$ | | 0.22 | 0.5 | V |
| I_{IH} | Logical "1" Input Current | $V_{IN} = 2.4V$ | | | 120 | μA | |
| | | $V_{IN} = 5.5V$ | | | 2 | mA | |
| I_{IL} | Logical "0" Input Current | $V_{IN} = 0.4V$ | | | -4.8 | mA | |
| I_{SC} | Output Short Circuit Current | $V_{CC} = 5.0V$, $T_A = 125^\circ\text{C}$, (Note 5) | -40 | -100 | -120 | mA | |
| I_{CC} | Supply Current | $V_{IN} = 5.0V$, (Each Driver) | | 11 | 18 | mA | |
| V_I | Input Clamp | $V_{CC} = \text{Min}$, $I_{IN} = -12\text{ mA}$ | | -1.0 | -1.5 | V | |

Switching Characteristics

$T_A = 25^\circ\text{C}$, $V_{CC} = 5V$, unless otherwise noted

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------|-----------------------------|--|-----|-----|-----|-------|
| t_{pd1} | Propagation Delay AND Gate | $R_L = 400\Omega$, $C_L = 15\text{ pF}$ (Figure 1) | | 8 | 12 | ns |
| t_{pd0} | | | | 11 | 18 | ns |
| t_{pd1} | Propagation Delay NAND Gate | $R_L = 400\Omega$, $C_L = 15\text{ pF}$ (Figure 1) | | 8 | 12 | ns |
| t_{pd0} | | | | 5 | 8 | ns |
| t_1 | Differential Delay | Load, 100 Ω and 5000 pF, (Figure 2) | | 12 | 16 | ns |
| t_2 | Differential Delay | Load, 100 Ω and 5000 pF, (Figure 2) | | 12 | 16 | ns |


Note 2: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 3: Unless otherwise specified min/max limits apply across the -55°C to +125°C temperature range for the DS7830. Typical values are for $T_A = 25^\circ\text{C}$ and $V_{CC} = 5.0V$.


Note 4: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Note 5: Only one output at a time should be shorted.

AC Test Circuit and Switching Time Waveforms

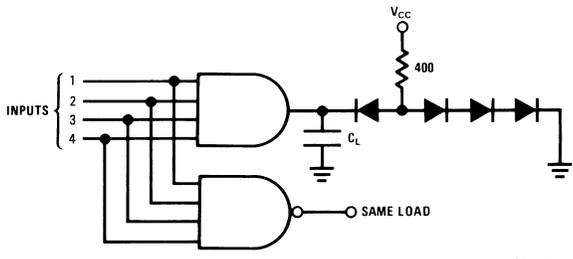


DS005799-4

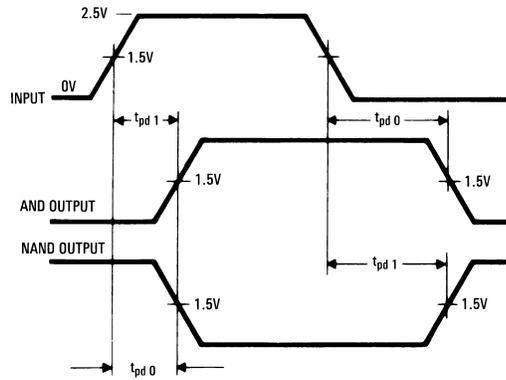


DS005799-9

f = 1 MHz
 $t_r = t_f \leq 10$ ns (10% to 90%)
 Duty cycle = 50%

FIGURE 1.

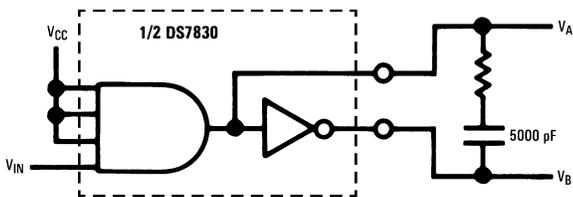

DS005799-8

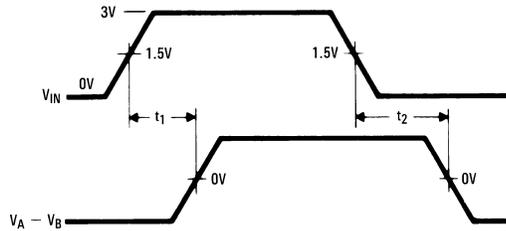


DS005799-10

FIGURE 2.


Typical Performance Characteristics

Output High Voltage (Logical "1") vs Output Current

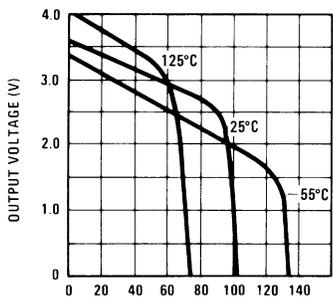


DS005799-7

Differential Delay vs Temperature

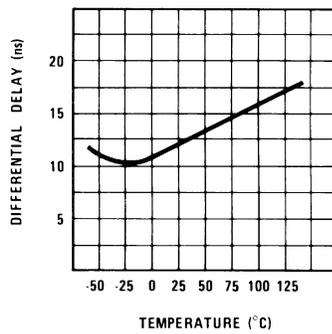

DS005799-11


Threshold Voltage vs Temperature

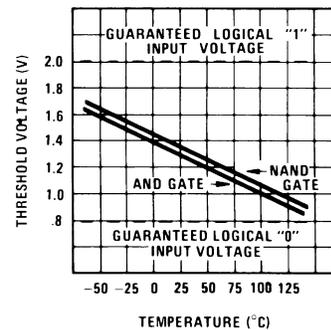


DS005799-12

Typical Performance Characteristics (Continued)


Differential Output Voltage ($|V_{AND} - V_{NAND}|$) vs Differential Output Current

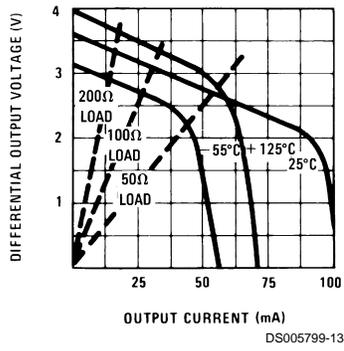

Power Dissipation (No Load) vs Data Input Frequency

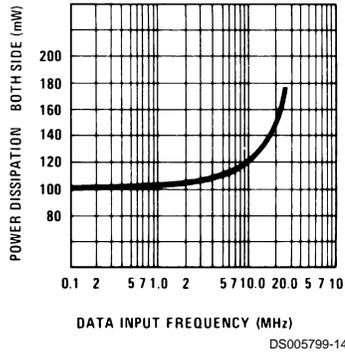


Output Low Voltage (Logical "0") vs Output Current

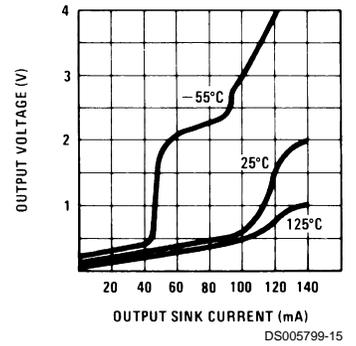


Typical Application

Digital Data Transmission

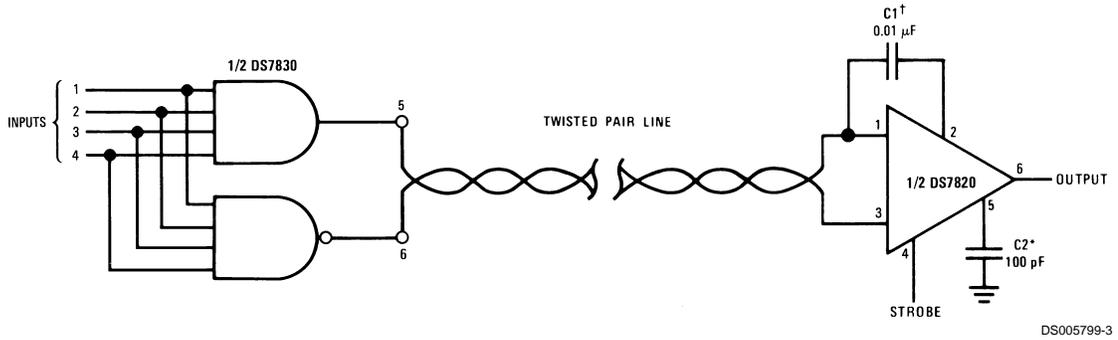

†Exact value depends on line length.
*Optional to control response time.

Schematic Diagram

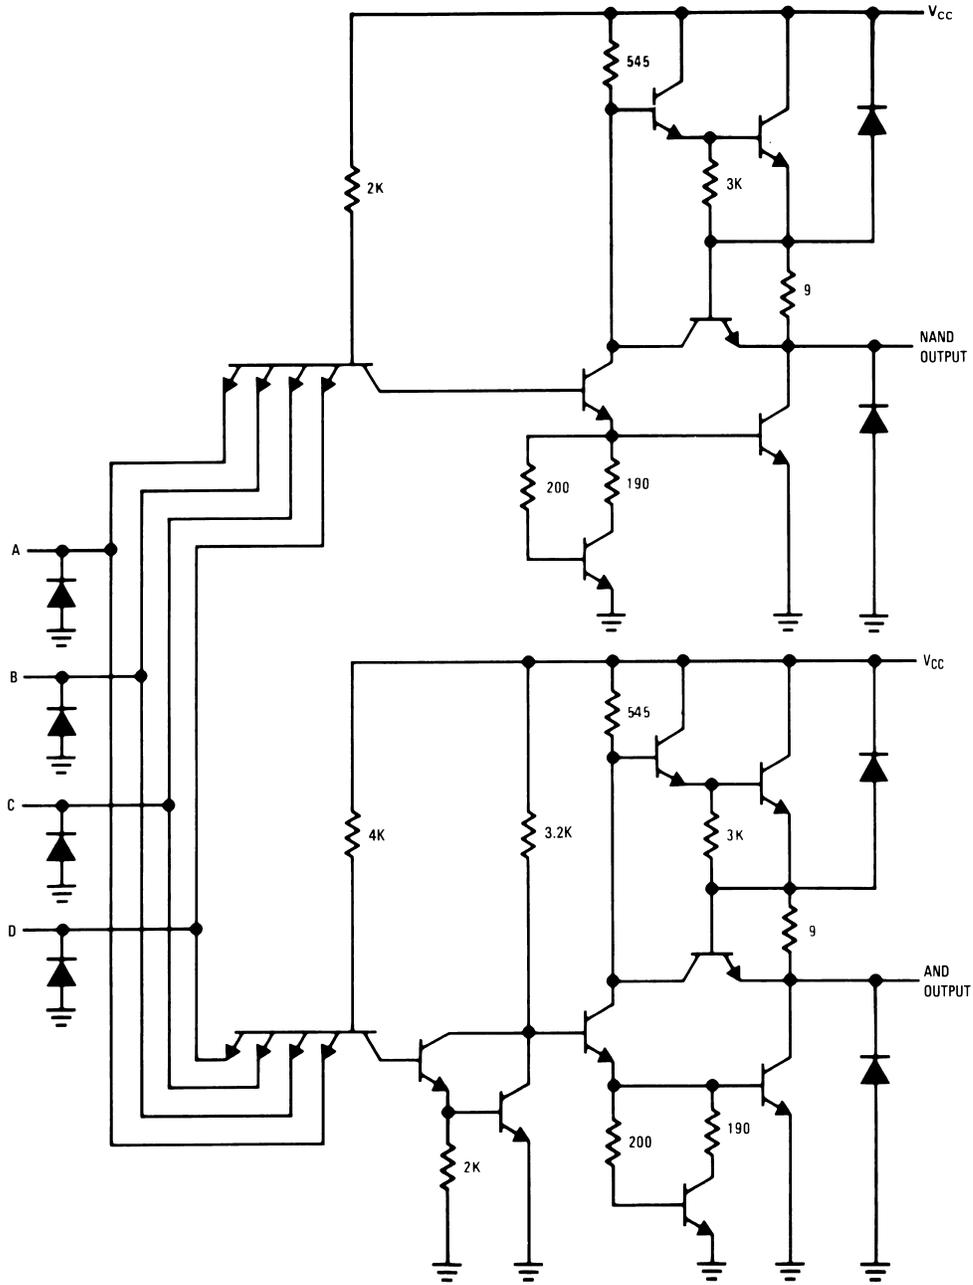

DS005799-1

*2 Per Package

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Mobile Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Transportation and Automotive | www.ti.com/automotive |
| Video and Imaging | www.ti.com/video |

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated