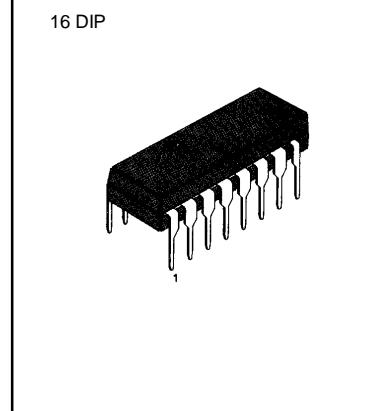


**ELECTRONIC BALLAST CONTROLLER**


The KA7521 is a electronic ballast controller for fluorescent inverter system. It contains soft start, no lamp protection and over temperature protection. With the zero voltage switching, it can also provide low noise and low power loss.

**FEATURES**

- Dimming Control
- 3 Step Soft start
- ZVS Driving
- DC feed-forward
- No Lamp Protection
- Over temperature protection with Variable Hysteresis
- Option Comparator
- Internal UVLO

**ORDERING INFORMATION**

Device	Package	Operating Temperature
KA7521	16 DIP	-25 ~ +100°C

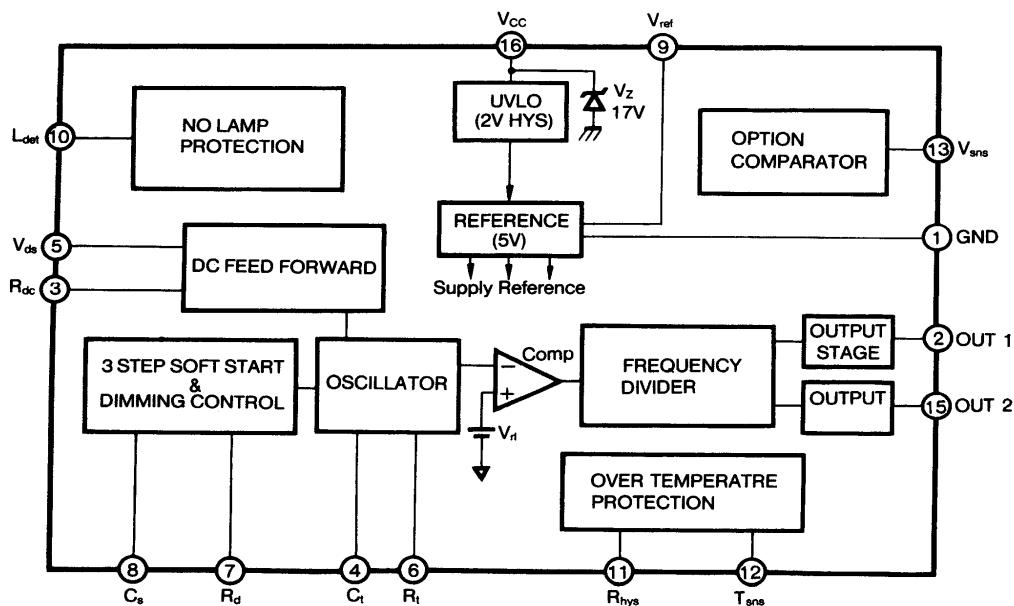**BLOCK DIAGRAM**

**ABLOLUTE MAXIMUM RATINGS**

Characteristic	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	17	V
Peak driver output current	I <sub>O(P)</sub>	500	mA
Zener diode current	I <sub>Z(D)</sub>	200	mA
Operating ambient temperature	T <sub>OPR</sub>	- 25 ~ +100	°C
Storage Temperature	T <sub>STG</sub>	- 65 ~ +150	°C

**ELECTRICAL CHARACTERISTICS**(V<sub>CC</sub> = 10V, T<sub>A</sub> = 25 °C, unless otherwise specified)

Characteristic	Symbol	Test conditions	Min	Typ	Max	Unit
<b>Under Voltage Lock Out Section</b>						
Start Threshold Voltage	V <sub>TH(ST)</sub>		9.1	9.7	10.3	V
UV Lockout Hysteresis	V <sub>THS</sub>		1.7	1.9	2.1	V
Start-up Supply Current	I <sub>ST</sub>	V <sub>CC</sub> = 7V		0.8	1.0	mA
Operating Supply Current	I <sub>CC</sub>	V <sub>CC</sub> = 12V, No Load	5		9	mA
<b>Reference Section</b>						
Reference Voltage	V <sub>REF</sub>		4.90	5	5.10	V
Load Regulation	Δ V <sub>REF</sub>	0 < I <sub>REF</sub> < 5mA		5		mV
<b>Preheating Section</b>						
Preheating Frequency	F <sub>D</sub>	V <sub>CS</sub> = 0V, R <sub>T</sub> = 33K, C <sub>T</sub> = 330pF	120		160	KHz
Preheating Time Current	I <sub>PT</sub>	V <sub>CS</sub> = 0V	7		27	uA
Preheating Dead Time	T <sub>PD</sub>		2		4	uS
<b>Oscillator Section</b>						
Amplitude	V <sub>OA</sub>		3		3.8	V
Normal Frequency	F <sub>NO</sub>	V <sub>CS</sub> = 2V, R <sub>T</sub> = 33K, C <sub>T</sub> = 330pF	80		120	KHz
Normal Dead Time	T <sub>ND</sub>		1.7		3.7	uS
<b>Output Section</b>						
Rising Time	T <sub>J</sub>	NO LOAD		80	120	nS
Falling Time	T <sub>F</sub>	NO LOAD		20	60	nS
High Voltage	V <sub>H</sub>	I <sub>O</sub> = 30mA	7.0	8.0		V
Low Voltage	V <sub>L</sub>	I <sub>O</sub> = - 30mA		0.1	0.4	V
<b>Dimming Control Section</b>						
Dimming 50% Frequency	F <sub>D</sub>	R <sub>D</sub> = 120K, R <sub>T</sub> = 33K, C <sub>T</sub> = 330pF	100		140	KHz
Dimming Current	I <sub>D</sub>	R <sub>D</sub> = 120K	20		46	uA



**ELECTRICAL CHARACTERISTICS(Continued)**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Over Temperature Protection</b>						
High temperature Voltage	$V_{HT}$		0.7		1.3	V
Reset Temperature Voltage	$V_{RT}$		2.0		2.8	V
Hysteresis max. current	$I_{HM}$	$R_{HYS} = 50K$	80		120	uA
<b>DC Feed forward</b>						
Lower Current	$I_{FL}$	$R_{DC} = 120K, V_{DS} = 1.25V$	2		6	uA
Middle Current	$I_{FM}$	$R_{DC} = 120K, V_{DS} = 1.75V$	5		9	uA
Upper Current	$I_{FU}$	$R_{DC} = 120K, V_{DS} = 2.23V$	7		11	uA
<b>No Lamp Protection</b>						
No Lamp Protection Voltage	$V_{NL}$		1.2		1.7	V
<b>Option Comparator</b>						
Option Comparator Voltage	$V_{OPT}$		2.7		3.6	V
<b>3 Step Frequency Section</b>						
Preheating Voltage Range	$V_{PR}$	$V_{DS} = 1.75V$	0.6		1.1	V
Soft Start Voltage Range	$V_{SR}$	$V_{DS} = 1.75V$	1.3		1.8	V
Full Power Voltage Range	$V_{FR}$	$V_{DS} = 1.75V$	2.6		3.1	V
Dimming Voltage Range	$V_{DR}$	$V_{DS} = 1.75V$	3.3		3.8	V
<b>Zener Voltage limit</b>						
Zener Voltage	$V_z$	$I_{VZ} = 20mA$	17	18	20	V



16-DIP-300A

### Dimensions in Millimeters/inches

