



ON Semiconductor®

<http://onsemi.com>

LA7784

Monolithic Linear IC Downconverter IC for Digital CATV

Overview

The LA7784 is a downconverter IC for digital CATV. It accepts RF input frequencies from 50 to 150MHz and supports the DOCSIS (USA) and Euro-DOCSIS (Europe) standards.

Features

- RF Mixer.
- Attenuation control for RF Mixer.
- Driver for SAW filter.
- IF AGC amplifier.
- IF Driver amplifier for ADC.

Specifications

Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CC} max	Pin 8, 14, 19, 20, 21, 22, 26, 27	6.0	V
Circuit voltages	V max	Pin 9	V _{CC}	V
Circuit current	I _{12, 13}	Pin 12, 13 sink current	2	V
Allowable power dissipation	Pd max	Ta ≤ 70°C	900*	mW
Operating temperature range	T _{opr}		-20 to +70	°C
Storage temperature range	T _{stg}		-55 to +150	°C

* On the board (114.3×76.1×1.6mm)

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V _{CC}	Pin 8, 14, 19, 20, 21, 22, 26, 27	5.0	V
Operating supply voltage range	V _{CC op}	Pin 8, 14, 19, 20, 21, 22, 26, 27	4.5 to 5.5	V

LA7784


AC Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 3.3\text{V}$

Parameter	Symbol	Pin No.	Conditions	Ratings			Unit
				min	typ	max	
Circuit current	I_{total}	8, 14, 19, 20, 21, 22, 26, 27	No Signal	80	105	130	mA
RF input frequency range	$f_{(\text{RF})}$	23, 24	$f_c: -3\text{dB}$	50		150	MHz
RF AGC range	GR1	26, 27	$V_9 = 2.5 \text{ to } 0\text{V}$	45	53		dB
Mixer conversion gain	CG1	26/23, 24 27/23, 24	$V_9 = 2.5\text{V}$	19	22	25	dB
Mixer inter modulation 1	IM3 1	26/23, 24 27/23, 24	Input = $75\text{dB}\mu$ $V_9 = 2.5\text{V}$	40	50		dB
IF input frequency range	$f_{(\text{IF})}$	4, 5	$f_c: -3\text{dB}$	30		100	MHz
IF amplifier gain	$G_{(\text{AGC})}$	12/4, 5 13/4, 5	$V_9 = 2.5\text{V}$	51	55	59	dB
IF inter modulation 2	IM3 2	12/4, 5 13/4, 5	Output = $110\text{dB}\mu$	40	50		dB
Range	GR2	12, 13	IF Output Level $< \pm 1\text{dB}$	3	5		dB
IF AGC output level	$V_{O(\text{IF}) 1}$	12	Single output		1.0		Vp-p
IF output level	$V_{O(\text{IF}) 2}$	13	Single output		1.0		Vp-p

Package Dimensions


unit: mm

3222A

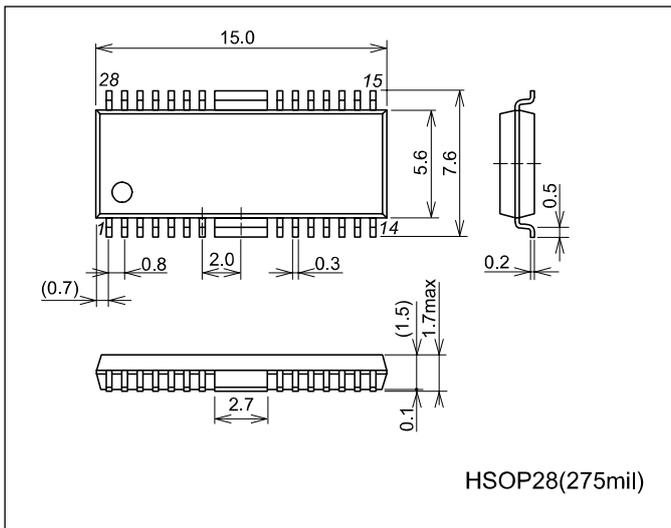


LA7784

Pin Assignment

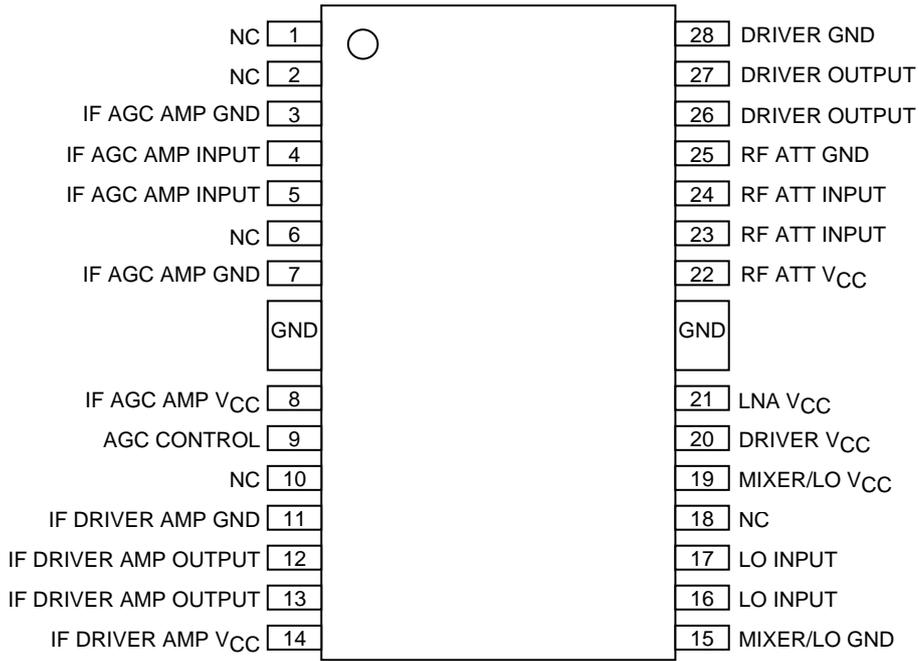

Block Diagram


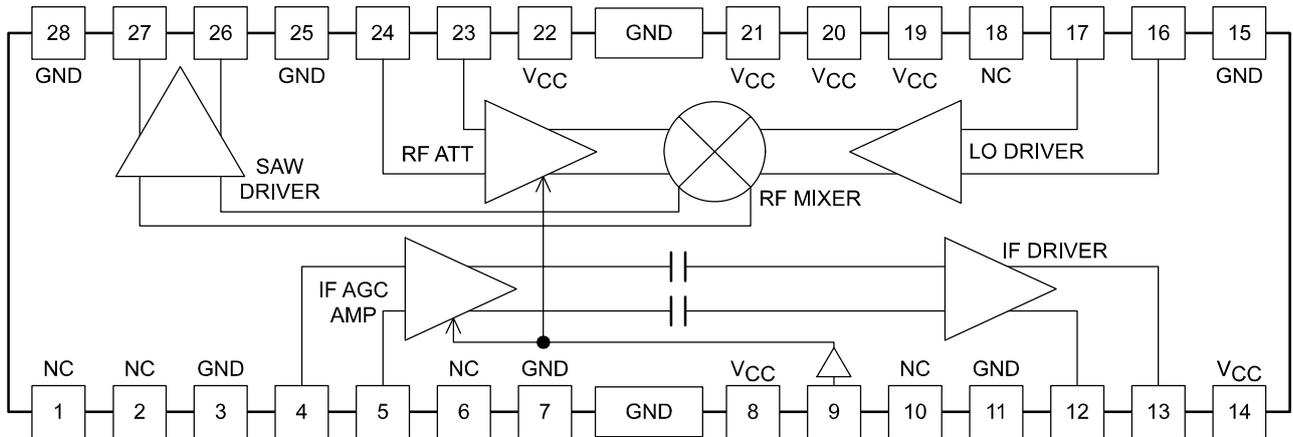


OMB05021

LA7784

Pin Description

(unit: Ω)

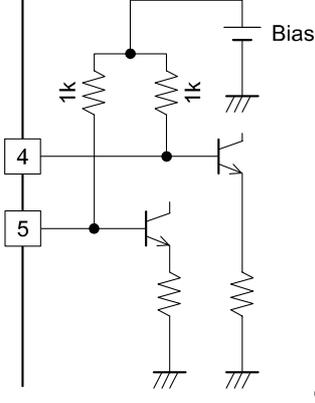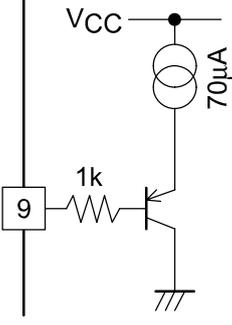Pin Number	Description	Equivalent circuit
1	No Connection	
2	No Connection	
3	AGC Amp GND	
4 5	AGC Amp Input	 <p style="text-align: right; font-size: small;">OMP05090</p>
6	No Connection	
7	AGC Amp GND	
8	AGC Amp V _{CC}	
9	AGC Control	 <p style="text-align: right; font-size: small;">OMP05091</p>
10	No Connection	
11	Post Amp GND	

Continued on next page.

LA7784

Continued from preceding page.

(unit: Ω)

Pin Number	Description	Equivalent circuit
12 13	Post Amp Outputs	<p style="text-align: right; font-size: small;">OMP05092</p>
14	Post Amp V_{CC}	
15	Mixer/LO GND	
16 17	LO Input	<p style="text-align: right; font-size: small;">OMP05093</p>
18	No Connection	
19	Mixer/LO V_{CC}	
20	Driver V_{CC}	

Continued on next page.


LA7784

Continued from preceding page.

(unit: Ω)

Pin Number	Description	Equivalent circuit
21 22	LNA V _{CC}	<p style="text-align: right; margin-right: 20px;">OMP05094</p>
23 24	LNA Inputs	
25	LNA GND	
26 27	Driver Outputs	<p style="text-align: right; margin-right: 20px;">OMP05095</p>
28	Driver Gnd	

Test Circuit

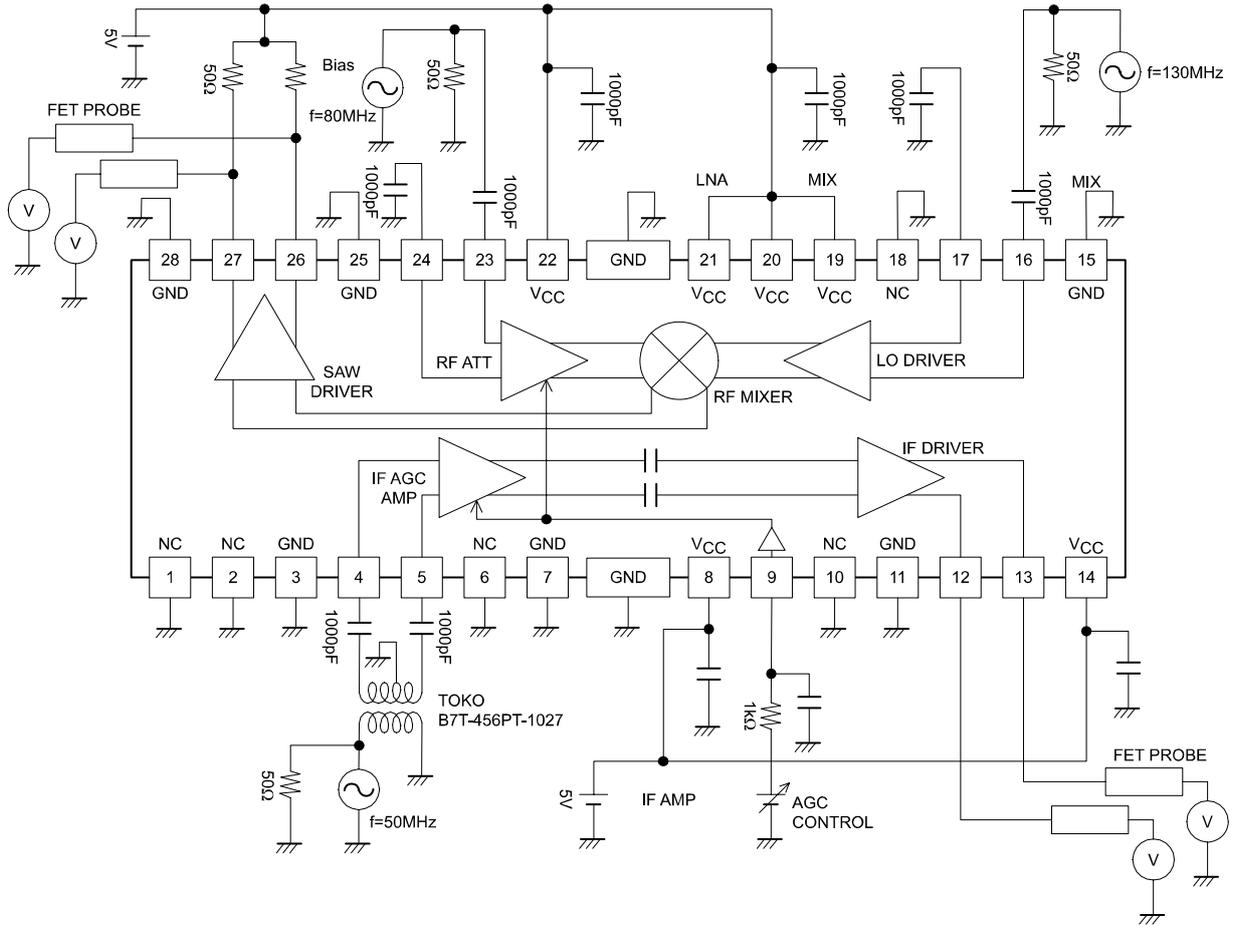

OMB05022

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.