

# LH0021,LH0021C,LH0041,LH0041C

*LH0021 LH0021C 1.0 Amp Power Operational Amplifier LH0041 LH0041C 0.2 Amp  
Power Operational Amplifier*



Literature Number: SNOSC15A

# LH0021/LH0021C 1.0 Amp Power Operational Amplifier LH0041/LH0041C 0.2 Amp Power Operational Amplifier

## General Description

The LH0021/LH0021C and LH0041/LH0041C are general purpose operational amplifiers capable of delivering large output currents not usually associated with conventional IC Op Amps. The LH0021 will provide output currents in excess of one ampere at voltage levels of  $\pm 12\text{V}$ ; the LH0041 delivers currents of 200 mA at voltage levels closely approaching the available power supplies. In addition, both the inputs and outputs are protected against overload, the devices are compensated with a single external capacitor and are free of any unusual oscillation or latch-up problems.

The excellent input characteristics and high output capability of the LH0021 make it an ideal choice for power applications such as DC servos, capstan drivers, deflection yoke drivers, and programmable power supplies.

The LH0041 is particularly suited for applications such as torque driver for inertial guidance systems, diddle yoke driver for alpha-numeric CRT displays, cable drivers, and programmable power supplies for automatic test equipment.

The LH0021 is supplied in a 8 pin TO-3 package rated at 20 watts with suitable heatsink. The LH0041 is supplied in both

12 pin TO-8 (2.5 watts with clip on heatsink) and a power 8 pin ceramic DIP (2 watts with suitable heatsink). The LH0021 and LH0041 are guaranteed over the temperature range of  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$  while the LH0021C and LH0041C are guaranteed from  $-25^\circ\text{C}$  to  $+85^\circ\text{C}$ .

## Features

- Output current
 

LH0021	1.0 Amp
LH0041	0.2 Amp
- Output voltage swing
 

LH0021	$\pm 12\text{V}$ into 10 $\Omega$
LH0041	$\pm 14\text{V}$ into 100 $\Omega$
- Wide full power bandwidth
 

	15 kHz
--	--------
- Low standby power
 


	100 mW at $\pm 15\text{V}$
--	----------------------------
- Low input offset voltage and current
 

	1 mV and 20 nA
--	----------------
- High slew rate
 

	3.0V/ $\mu\text{s}$
--	---------------------
- High open loop gain
 

	100 dB
--	--------

## Schematic Diagram

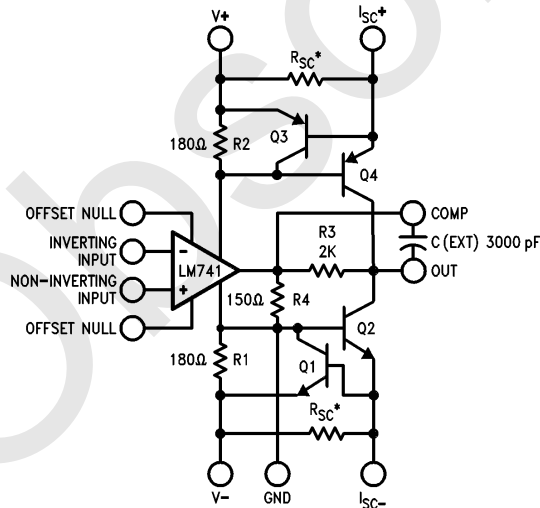

\*R<sub>SC</sub> external on "G" and "K" packages. R<sub>SC</sub> internal on "J" package. Offset Null connections available only on "G" package.

TL/H/9298-1

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	±18V
Power Dissipation	See Curves
Differential Input Voltage	±30V
Input Voltage (Note 1)	±15V
Peak Output Current (Note 2)	
LH0021/LH0021C	2.0 Amps
LH0041/LH0041C	0.5 Amps

Output Short Circuit Duration (Note 3)	Continuous
Operating Temperature Range	
LH0021/LH0041	−55°C to +125°C
LH0021C/LH0041C	−25°C to +85°C
Storage Temperature Range	−65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	300°C
ESD rating to be determined.	

## DC Electrical Characteristics for LH0021/LH0021C (Note 4)

Parameter	Conditions	Limits						Units
		LH0021			LH0021C			
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$R_S < 100\Omega$ , $T_C = 25^\circ\text{C}$ $R_S < 100\Omega$		1.0	3.0 5.0		3.0 7.5		mV mV
Voltage Drift with Temperature	$R_S < 100\Omega$		3	25		5	30	$\mu\text{V}/^\circ\text{C}$
Offset Voltage Drift with Time			5			5		$\mu\text{V}/\text{week}$
Offset Voltage Change with Output Power			5	15		5	20	$\mu\text{V}/\text{W}$
Input Offset Current	$T_C = 25^\circ\text{C}$		30	100 300		50	200 500	nA nA
Offset Current Drift with Temperature			0.1	1.0		0.2	1.0	nA/ $^\circ\text{C}$
Offset Current Drift with Time			2			2		nA/week
Input Bias Current	$T_C = 25^\circ\text{C}$		100	300 1.0		200	500 1.0	nA $\mu\text{A}$
Input Resistance	$T_C = 25^\circ\text{C}$	0.3	1.0		0.3	1.0		M $\Omega$
Input Capacitance			3			3		pF
Common Mode Rejection Ratio	$R_S 100\Omega$ , $\Delta V_{CM} = \pm 10\text{V}$	70	90		70	90		dB
Input Voltage Range	$V_S = \pm 15\text{V}$	$\pm 12$			$\pm 12$			V
Power Supply Rejection Ratio	$R_S \leq 100\Omega$ , $\Delta V_S = \pm 10\text{V}$	80	96		70	90		dB
Voltage Gain	$V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$ $R_L = 1\text{ k}\Omega$ , $T_C = 25^\circ\text{C}$	100	200		100	200		V/mV
	$V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$ $R_L = 100\Omega$	25			20			V/mV
Output Voltage Swing	$V_S = \pm 15\text{V}$ , $R_L = 100\Omega$ $V_S = \pm 15\text{V}$ , $T_C = 25^\circ\text{C}$ , $R_{SC} = 0.5\Omega$	$\pm 13.5$ $\pm 11.0$	14 $\pm 12$		$\pm 13$ $\pm 10$	$\pm 14$ $\pm 12$		V V
Output Short Circuit Current	$V_S = \pm 15\text{V}$ , $T_C = 25^\circ\text{C}$ , $R_{SC} = 0.5\Omega$	0.8	1.2	1.6	0.8	1.2	1.6	Amps
Power Supply Current	$V_S = \pm 15\text{V}$ , $V_{OUT} = 0$		2.5	3.5		3.0	4.0	mA
Power Consumption	$V_S = \pm 15\text{V}$ , $V_{OUT} = 0$		75	105		90	120	mW

## AC Electrical Characteristics for LH0021/LH0021C ( $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$ , $C_C = 3000\text{ pF}$ )

Parameter	Conditions	Limits						Units
		LH0021			LH0021C			
		Min	Typ	Max	Min	Typ	Max	
Slew Rate	$A_V = +1, R_L = 100\Omega$	0.8	3.0		1.0	3.0		V/ $\mu$ s
Power Bandwidth	$R_L = 100\Omega$		20			20		kHz
Small Signal Transient Response			0.3	1.0		0.3	1.5	$\mu$ s
Small Signal Overshoot			5	20		10	30	%
Settling Time (0.1%)	$\Delta V_{IN} = 10V, A_V = +1$		4			4		$\mu$ s
Overload Recovery Time			3			3		$\mu$ s
Harmonic Distortion	$f = 1\text{ kHz}, P_O = 0.5W$		0.2			0.2		%
Input Noise Voltage	$R_s = 50\Omega, \text{B.W.} = 10\text{ Hz to } 10\text{ kHz}$		5			5		$\mu$ V/rms
Input Noise Current	$\text{B.W.} = 10\text{ Hz to } 10\text{ kHz}$		0.05			0.05		nA/rms

## DC Electrical Characteristics for LH0041/LH0041C (Note 4)

Parameter	Conditions	Limits						Units
		LH0041			LH0041C			
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$R_S < 100\Omega$ , $T_A = 25^{\circ}\text{C}$ $R_S < 100\Omega$		1.0	3.0 5.0		3.0	6.0 7.5	mV mV
Voltage Drift with Temperature	$R_S < 100\Omega$		3			5		$\mu\text{V}/^{\circ}\text{C}$
Offset Voltage Drift with Time			5			5		$\mu\text{V}/\text{week}$
Offset Voltage Change with Output Power			15			15		$\mu\text{V}/\text{W}$
Offset Voltage Adjustment Range	(Note 5)		20			20		mV
Input Offset Current	$T_A = 25^{\circ}\text{C}$		30	100 300		50	200 500	nA nA
Offset Current Drift with Temperature			0.1	1.0		0.2	1.0	nA/ $^{\circ}\text{C}$
Offset Current Drift with Time			2			2		nA/week
Input Bias Current	$T_A = 25^{\circ}\text{C}$		100	300 1.0		200	500 1.0	nA $\mu\text{A}$
Input Resistance	$T_A = 25^{\circ}\text{C}$	0.3	1.0		0.3	1.0		M $\Omega$
Input Capacitance			3			3		pF
Common Mode Rejection Ratio	$R_S 100\Omega$ , $\Delta V_{CM} = \pm 10\text{V}$	70	90		70	90		dB
Input Voltage Range	$V_S = \pm 15\text{V}$	+12			+12			V
Power Supply Rejection Ratio	$R_S \leq 100\Omega$ , $\Delta V_S = \pm 10\text{V}$	80	96		70	90		dB
Voltage Gain	$V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$ $R_L = 1\text{ k}\Omega$ , $T_A = 25^{\circ}\text{C}$ $V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$ $R_L = 100\Omega$	100	200		100	200		V/mV
		25			20			V/mV
Output Voltage Swing	$V_S = \pm 15\text{V}$ , $R_L = 100\Omega$	$\pm 13$	14		$\pm 13$	$\pm 14$		V
Output Short Circuit Current	$V_S = \pm 15\text{V}$ , $T_A = 25^{\circ}\text{C}$ (Note 6)		200	300		200	300	mA
Power Supply Current	$V_S = \pm 15\text{V}$ , $V_{OUT} = 0$		2.5	3.5		3.0	4.0	mA
Power Consumption	$V_S = \pm 15\text{V}$ , $V_{OUT} = 0$		75	105		90	120	mW

## AC Electrical Characteristics for LH0041/LH0041C ( $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$ , $C_C = 3000\text{ pF}$ )

Parameter	Conditions	Limits						Units
		LH0041			LH0041C			
		Min	Typ	Max	Min	Typ	Max	
Slew Rate	$A_V = +1, R_L = 100\Omega$	1.5	3.0		1.0	3.0		V/ $\mu$ s
Power Bandwidth	$R_L = 100\Omega$		20			20		kHz
Small Signal Transient Response			0.3	1.0		0.3	1.5	$\mu$ s
Small Signal Overshoot			5	20		10	30	%
Settling Time (0.1%)	$\Delta V_{IN} = 10V, A_V = +1$		4			4		$\mu$ s
Overload Recovery Time			3			3		$\mu$ s
Harmonic Distortion	$f = 1\text{ kHz}, P_O = 0.5W$		0.2			0.2		%
Input Noise Voltage	$R_s = 50\Omega, B.W. = 10\text{ Hz to }10\text{ kHz}$		5			5		$\mu V/rms$
Input Noise Current	$B.W. = 10\text{ Hz to }10\text{ kHz}$		0.05			0.05		nA/rms

**Note 1:** Rating applies for supply voltages above  $\pm 15\text{V}$ . For supplies less than  $\pm 15\text{V}$ , rating is equal to supply voltage.

**Note 2:** Rating applies for LH0041G and LH0021K with  $R_{SC} = 0\Omega$ .

**Note 3:** Rating applies as long as package power rating is not exceeded.













**Note 4:** Specifications apply for  $\pm 5\text{V} \leq V_S \leq 18\text{V}$ , and  $-55^\circ\text{C} \leq T_C \leq 125^\circ\text{C}$  for LH0021K and LH0041G, and  $-25^\circ\text{C} \leq T_C \leq +85^\circ\text{C}$  for LH0021CK, LH0041CG and LH0041CJ unless otherwise specified. Typical values are for  $25^\circ\text{C}$  only.

**Note 5:** TO-8 "G" packages only.

**Note 6:** Rating applies for "J" DIP package and for TO-8 "G" package with  $R_{SC} = 3.3\text{ ohms}$ .






**Note 7:** See Typical Performance Characteristics.

## Typical Performance Characteristics




TL/H/9298-6

## Typical Performance Characteristics (Continued)



TL/H/9298-7


## Connections Diagrams

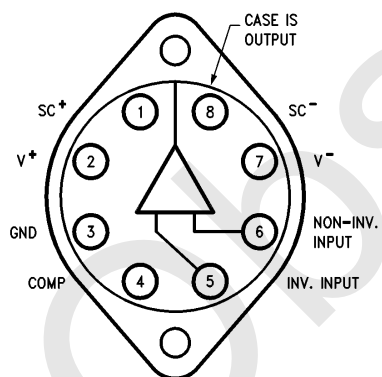

TL/H/9298-2

**Top View**


Order Number LH0021K or LH0021CK  
 See NS Package Number K08A

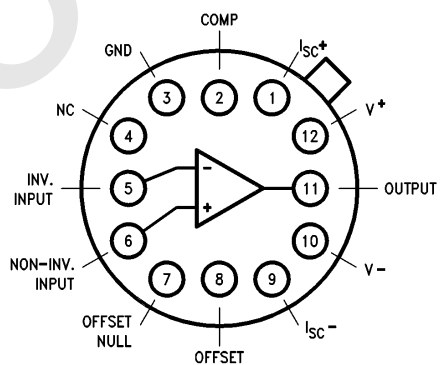

TL/H/9298-3

Order Number LH0041G or LH0041CG  
 See NS Package Number H12B


## Connection Diagrams (Continued)



Top View

Order Number LH0041CJ  
See NS Package Number HY08A


TL/H/9298-4

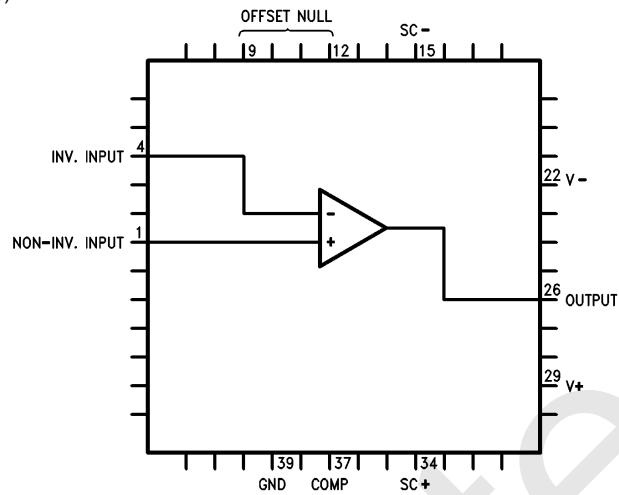

Order Number LH0041E  
See NS Package Number E48A

TL/H/9298-5


## Typical Applications

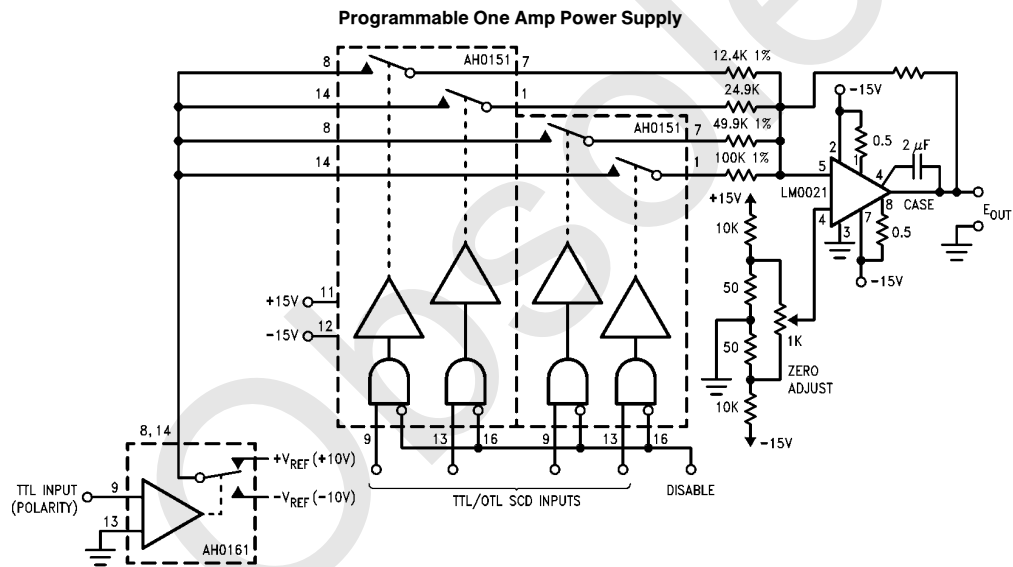

TL/H/9298-8


## Typical Applications (Continued)

### 10W (rms) Audio Amplifier

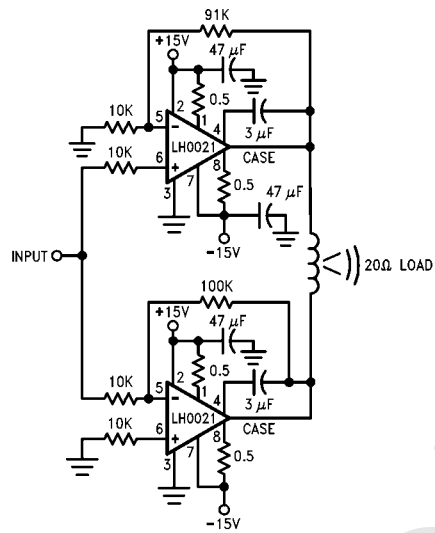

TL/H/9298-9


### Dual Tracking One Amp Power Supply

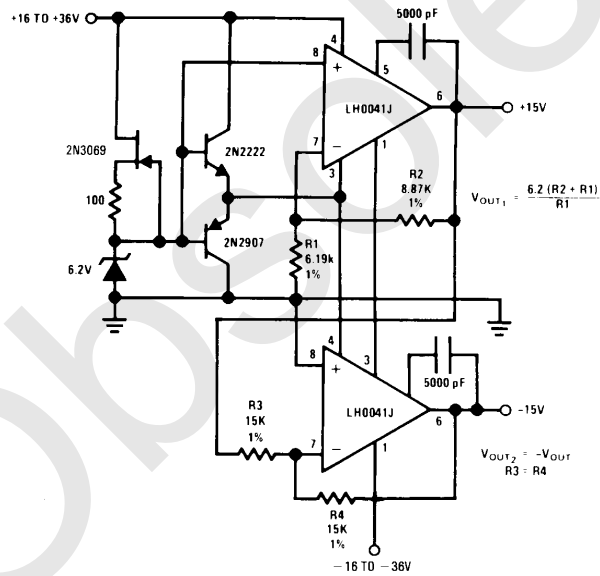

TL/H/9298-10


## Typical Applications (Continued)

### CRT Deflection Yoke Driver

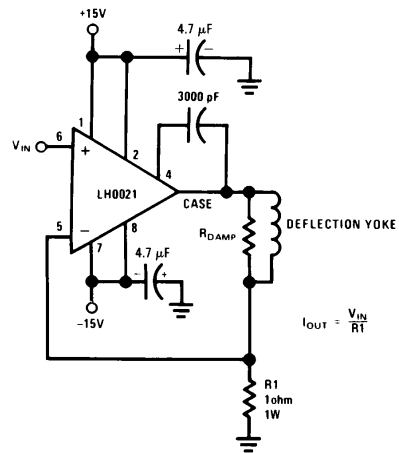


TL/H/9298-11

### Two Way Intercom

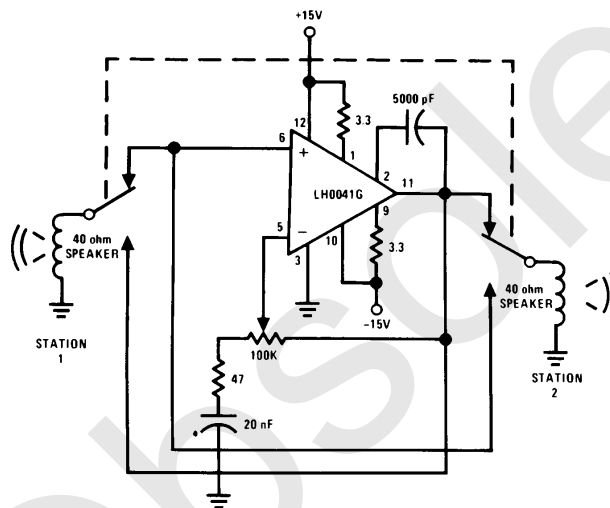

TL/H/9298-12


### Programmable High Current Source/Sink

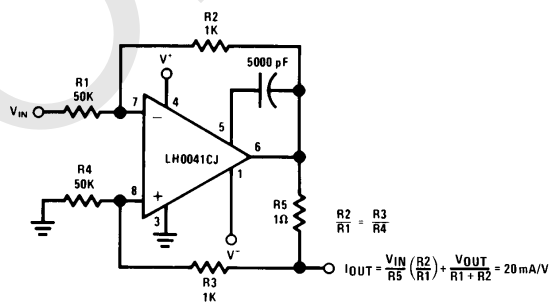


TL/H/9298-13

## Typical Applications (Continued)

Power Comparator

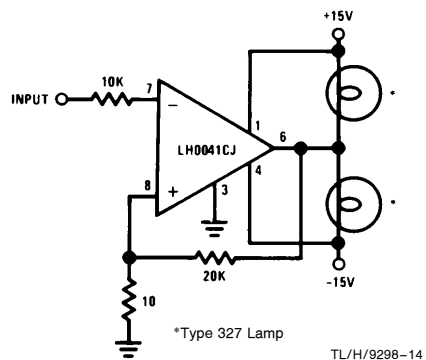


DC Servo Amplifier

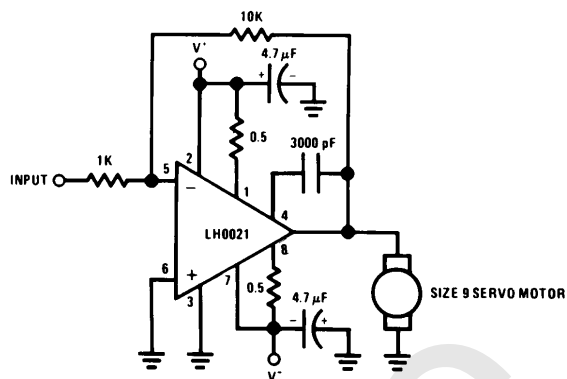


## Auxiliary Circuits


LH0021 Unity Gain Circuit with Short Circuit Limiting

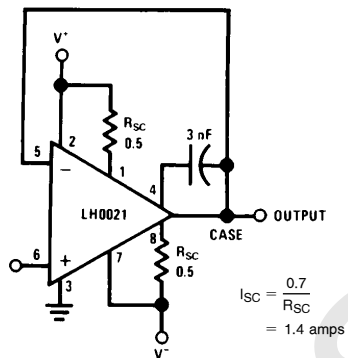


LH0041G Unity Gain with Short Circuit Limiting

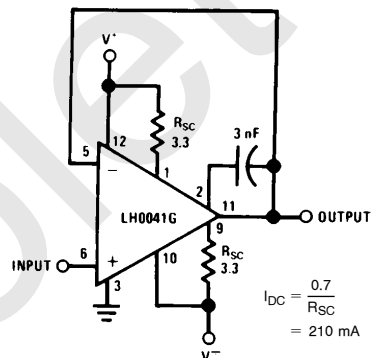

LH0041/LH0021 Offset Voltage Null Circuit\*  
(LH0041CJ Pin Connections Shown)\*

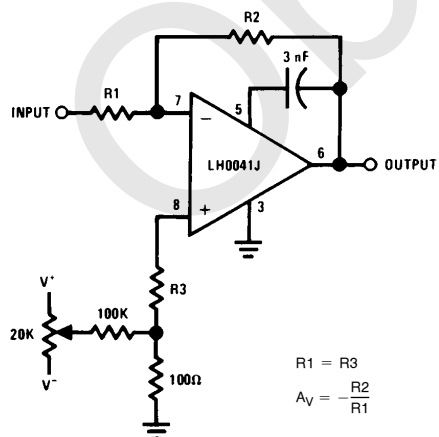


LH0041G Offset Voltage Null Circuit\*

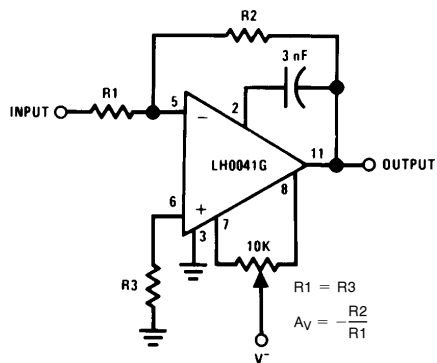

## Auxiliary Circuits (Continued)


### Operation from Single Supplies

POSITIVE

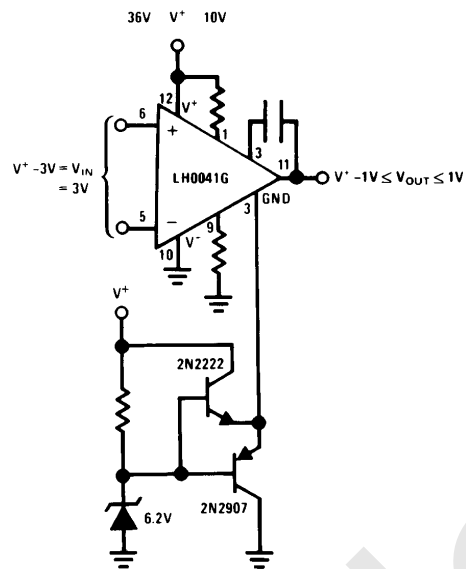

TL/H/9298-20


NEGATIVE

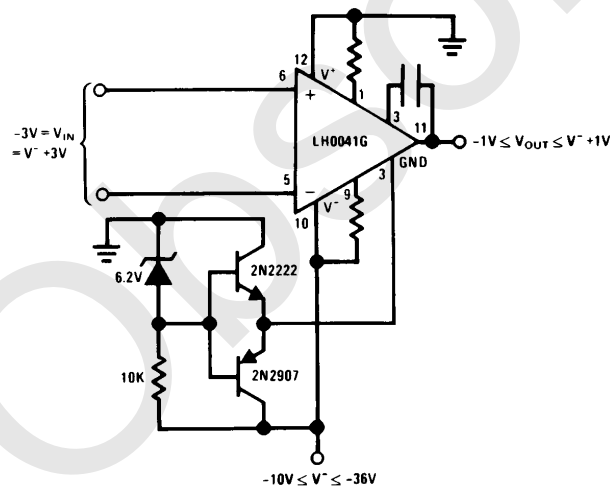


TL/H/9298-21

## Auxiliary Circuits (Continued)

### Operation from Non-Symmetrical Supplies

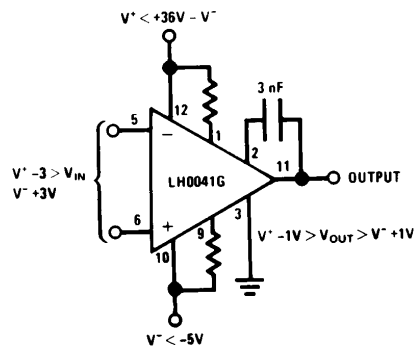


TL/H/9298-22

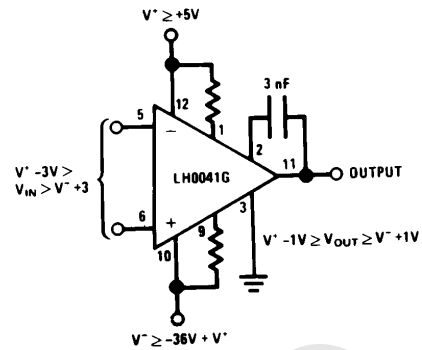

TL/H/9298-23

\*For additional offset null circuit techniques see National Linear Applications Handbook.

## Physical Dimensions inches (millimeters)

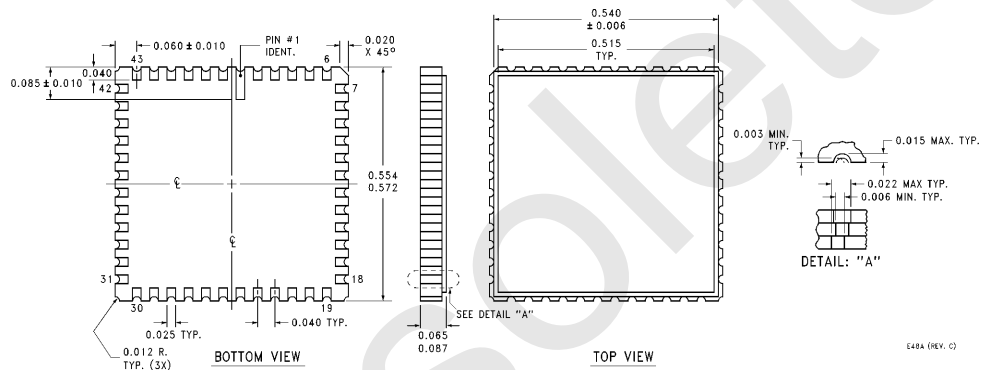


Leadless Chip Carrier (E)  
 Order Number LH0041E  
 NS Package Number E48A



E48A (REV. C)



**Physical Dimensions** inches (millimeters) (Continued)

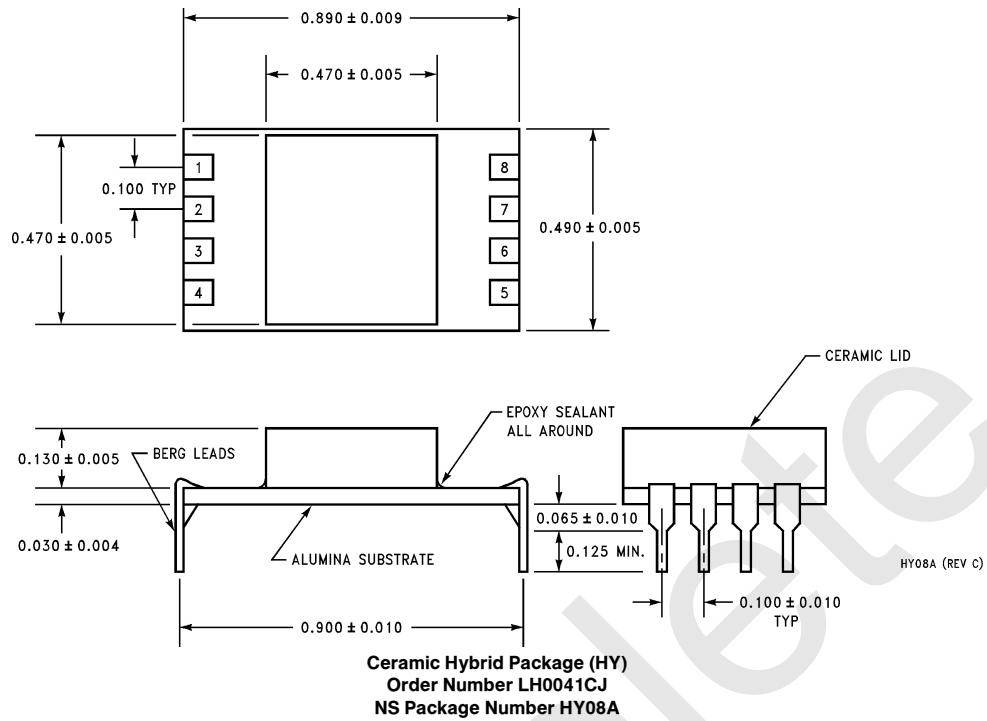

# Physical Dimensions inches (millimeters) (Continued)

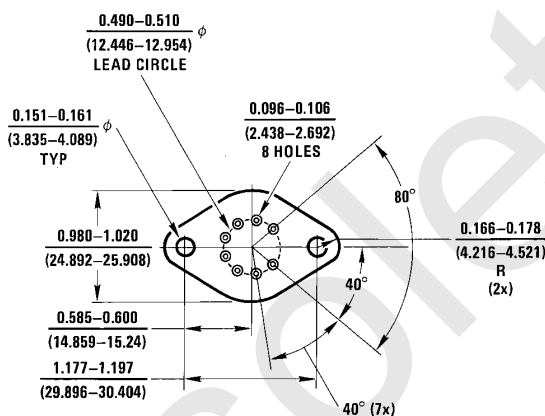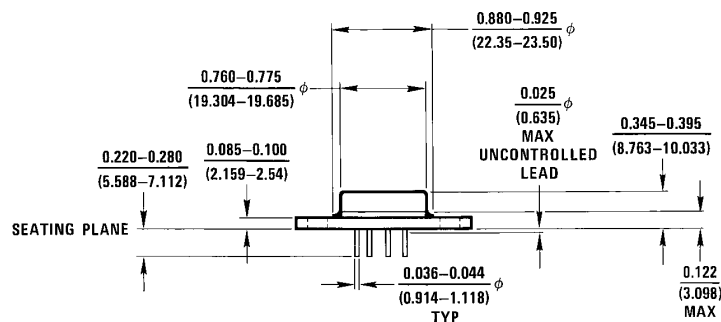

K08A (REV C)

**Metal Can Package (K)**  
**Order Number LH0021K or LH0021CK**  
**NS Package Number K08A**

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

**National Semiconductor Europe**  
Fax: (+49) 0-180-530 85 86  
Email: cnjwge@tevm2.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Français Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
19th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
Tel: 81-043-299-2309  
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated