

DUAL 4-LINE TO 1-LINE DATA SELECTOR/MULTIPLEXER N.7.41.53

S54153-B,F,W • N74153-B,F

DIGITAL 54/74 TTL SERIES |

DESCRIPTION

Each of these monolithic, data selectors/multiplexers contains inverters and drivers to supply fully complementary, on-chip, binary decoding data selection to the AND-OR-invert gates. Separate strobe inputs are provided for each of the two four-line sections.

These data selectors/multiplexers are fully compatible for use with most TTL and DTL circuits. Each diode-clamped input represents only one normalized Series 54/74 load, and full fan-out to 10 normalized Series 54/74 loads is available from each of the outputs in the low-level state. A fan-out to 20 normalized Series 54/74 loads is provided in the high-level state to facilitate connection of unused inputs to used inputs. Typical power dissipation is 180 milliwatts.


Resistor values in the OR function have been reduced to values used with Series 54H. This minimizes the capacitive effects of paralleling the phase-splitter transistors and reduces the propagation delay times. The S54153 is characterized for operation over the full mllitary temperature range of -55°C to 125° C; the N74153 is characterized for operation from 0°C to 70°C.

TRUTH TABLE


| ADDRESS INPUTS | | 1 | DATA INPUTS | | | STROBE | ОИТРИТ | |
|-------------------|---|----|-------------|----|----|--------|--------|--|
| В | Α | CO | C1 | C2 | СЗ | G | Y | |
| Х | х | х | х | х | х | Н | L | |
| L | L | L | × | × | x | L | L | |
| L | L | H | × | × | x | L | н | |
| L | Н | х | L | × | x | L | L | |
| L | н | × | н | х | x | L | н | |
| Н | L | х | × | L | × | L | L | |
| н | L | Х | × | н | x | L | н | |
| Н | н | Х | × | × | L | L | L | |
| Н | н | × | × | × | Н | L | н | |

Address inputs A and B are common to both sections. H = high level, L = low level, X = irrelevent.


LOGIC DIAGRAM



PIN CONFIGURATIONS



SCHEMATIC DIAGRAM

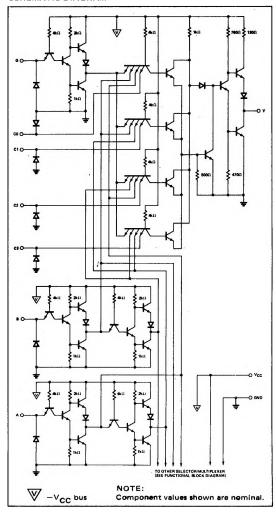

RECOMMENDED OPERATING CONDITIONS

| | | \$54153 | | | N74153 | | |
|---|-----|---------|----------|------|--------|----------|------|
| | MIN | NOM | MAX | MIN | NOM | MAX | UNIT |
| Supply Voltage V _{CC} Normalized Fan-Out from each Output, N | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | v |
| High Logic Level Low Logic Level | | | 20 10 | | | 20 10 | |
| Operating Free-Air Temperature Range, TA | -55 | 25 | 125 | 0 | 25 | 70 | °c |

ELECTRICAL CHARACTERISTICS(over recommended operating free-air temperature range unless otherwise noted)

| PARAMETER | | TEST CONDITIONS* | | MIN | TYP** | MAX. | UNIT |
|------------|---|---|---|------------|----------|------------|----------|
| VIH VIL | High-level input voltage | | | 2 | | 0.8 | V V |
| Voн | High-level output voltage | V _{CC} = MIN, V _{IL} = 0.8V, | V _{IH} = 2V, I _{OH} = -800μA | 2.4 | 3.1 | | V |
| VOL | Low-level output voltage | V _{CC} = MIN, V _{IL} = 0.8V, | V _{IH} = 2V, I _{OL} = 16mA | | 0.2 | 0.4 | V |
| ΉΗ | High-level input current (each input) | V _{CC} = MAX, V _{CC} = MAX, | V _I = 2.4V V _I = 5.5V | | | 40 1 | μA mA |
| IIL. | Low-level input current (each input) | VCC = MAX, | V ₁ = 0.4V | | | -1.6 | mA |
| los | Short-circuit output current [†] | V _{CC} = MAX, | S54153 N74153 | -20 -18 | | -55 -57 | mA |
| CCL | Supply current, low-level output | V _{CC} = MAX, | S54153 N74153 | | 36 36 | 52 60 | m.A |

SWITCHING CHARACTERISTICS, V_{CC} = 5V, T_A = 25°C, N = 10

| PARAMETER | FROM (INPUT) | TO (OUTPUT) | TEST | CONDITIONS | MIN | ТҮР | MAX | UNIT |
|--|---|---|------------------------|-----------------------|-----|----------------------------------|----------------------------------|----------------------------|
| tPLH tPHL tPLH tPHL tPLH tPHL | Data Data Address Address Strobe Strobe | * | C _L = 30pF, | R _L = 400Ω | | 12 15 22 22 19 15 | 18 23 34 34 30 23 | ns ns ns ns ns |

^{*} For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

^{**} All typical values are at V_{CC} = 5V, T_A = 25°C.
† Not more than one output should be shorted at a time.