

DS3245

DS3245 Quad MOS Clock Driver



Literature Number: SNOSBO2A

DS3245 Quad MOS Clock Driver

General Description

The DS3245 is a quad bipolar-to-MOS clock driver with TTL compatible inputs. It is designed to provide high output current and voltage capabilities necessary for optimum driving of high capacitance N-channel MOS memory systems.


Only 2 supplies, $5 V_{DC}$ and $12 V_{DC}$, are required without compromising the usual high V_{OH} specification obtained by circuits using a third supply.

The device features 2 common enable inputs, a refresh input, and a clock control input for simplified system designs. The circuit was designed for driving highly capacitive loads at high speeds and uses Schottky-clamped transistors. PNP transistors are used on all inputs, thereby minimizing input loading.


Features

- TTL compatible inputs
- Operates from 2 standard supplies: $5 V_{DC}$, $12 V_{DC}$
- Internal bootstrap circuit eliminates need for external PNP's
- PNP inputs minimize loading
- High voltage/current outputs
- Input and output clamping diodes
- Control logic optimized for use with MOS memory systems
- Pin and function equivalent to Intel 3245

Logic and Connection Diagrams

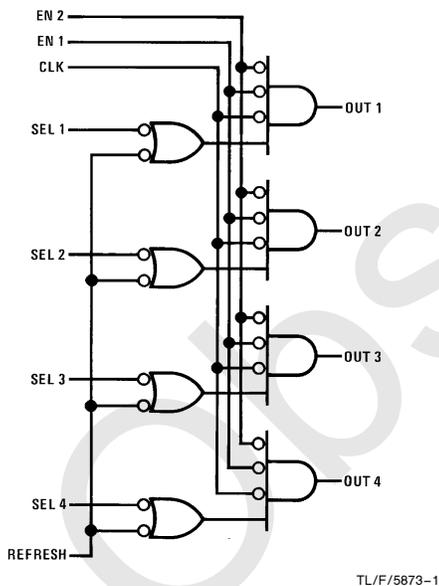

Dual-In-Line Package

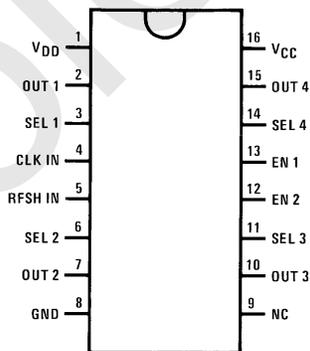

TL/F/5873-2

Top View

Order Number DS3245J or DS3245N
See NS Package Number J16A or N16A

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Temperature Under Bias	-10°C to +85°C
Storage Temperature	-65°C to +150°C
Supply Voltage, V_{CC}	-0.5V to +7V
Supply Voltage, V_{DD}	-0.5V to +14V
All Input Voltages	-1.0V to V_{DD}
Outputs for Clock Driver	-1.0V to $V_{DD} + 1V$
Maximum Power Dissipation* at 25°C	
Cavity Package	1509 mW
Molded Package	1476 mW

*Derate cavity package 10.1 mW/°C above 25°C; derate molded package 11.8 mW/°C above 25°C.

Operating Conditions

	Min	Max	Units
Supply Voltage, V_{CC}	4.75	5.25	V
Supply Voltage, V_{DD}	11.4	12.6	V
Operating Temperature θT_A	0	75	°C

Electrical Characteristics (Notes 2 and 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
I_{FD}	Select Input Load Current	$V_F = 0.45V$			-0.25	mA
I_{FE}	Enable Input Load Current	$V_F = 0.45V$			-1.0	mA
I_{RD}	Select Input Leakage Current	$V_R = 5V$			10	μA
I_{RE}	Enable Input Leakage Current	$V_R = 5V$			40	μA
V_{OL}	Output Low Voltage	$I_{OL} = 5\text{ mA}, V_{IH} = 2V$			0.45	V
		$I_{OL} = -5\text{ mA}$	-1.0			V
V_{OH}	Output High Voltage	$I_{OH} = -1\text{ mA}, V_{IL} = 0.8V$	$V_{DD} - 0.50$			V
		$I_{OH} = 5\text{ mA}$			$V_{DD} + 1.0$	V
V_{IL}	Input Low Voltage, All Inputs				0.8	V
V_{IH}	Input High Voltage, All Inputs		2			V
V_{CLAMP}	Input Clamp Voltage	$V_{CC} = \text{Min}, I_{IN} = -12\text{ mA}$		-1.0	-1.5	V

Power Supply Current Drain

Symbol	Parameter	Conditions	Min	Typ	Max	Units
I_{CC}	Current from V_{CC} Output in High State	$V_{CC} = 5.25V,$ $V_{DD} = 12.6V$		26	34	mA
I_{DD}	Current from V_{DD} Output in High State	$V_{CC} = 5.25V,$ $V_{DD} = 12.6V$		23	30	mA
I_{CC}	Current from V_{CC} Output in Low State	$V_{CC} = 5.25V,$ $V_{DD} = 12.6V$		29	39	mA
I_{DD}	Current from V_{DD} Output in Low State	$V_{CC} = 5.25V,$ $V_{DD} = 12.6V$		13	19	mA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: Unless otherwise specified min/max limits apply across the 0°C to +°C range. All typical values are for $T_A = 25^\circ C$ and $V_{CC} = 5V$ and $V_{DD} = 12V$.

Note 3: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Switching Characteristics $T_A = 0^\circ\text{C}$ to $+75^\circ\text{C}$, $V_{CC} = 5\text{V} \pm 5\%$, $V_{DD} = 12\text{V} \pm 5\%$

Symbol	Parameter	Conditions	Min ⁽¹⁾	Typ ^(2,4)	Max ⁽³⁾	Units
t_{-+}	Input to Output Delay	$R_{\text{SERIES}} = 0$	5	11		ns
t_{DR}	Delay Plus Rise Time	$R_{\text{SERIES}} = 0$		20	32	ns
$t_{+ -}$	Input to Output Delay	$R_{\text{SERIES}} = 0$	3	7		ns
t_{DF}	Delay Plus Fall Time	$R_{\text{SERIES}} = 0$		18	32	ns
t_{T}	Output Transition Time	$R_{\text{SERIES}} = 20\Omega$	10	17	25	ns
t_{DR}	Delay Plus Rise Time	$R_{\text{SERIES}} = 20\Omega$		27	38	ns
t_{DF}	Delay Plus Fall Time	$R_{\text{SERIES}} = 20\Omega$		25	38	ns

Capacitance $T_A = 25^\circ\text{C}$ ⁽⁵⁾

Symbol	Parameter	Conditions	Min	Typ	Max	Units
C_{IN}	Input Capacitance, $\bar{I}_1, \bar{I}_2, \bar{I}_3, \bar{I}_4$			5	8	pF
C_{IN}	Input Capacitance, $\bar{R}, \bar{C}, \bar{E}1, \bar{E}2$			8	12	pF

Note 1: $C_L = 150\text{ pF}$

Note 2: $C_L = 200\text{ pF}$



Note 3: $C_L = 250\text{ pF}$

} These values represent a range of total stray plus clock capacitance for nine 4k RAMs.

Note 4: Typical values are measured at 25°C .


Note 5: This parameter is periodically sampled and is not 100% tested. Condition of measurement is $f = 1\text{ MHz}$, $V_{\text{BIAS}} = 2\text{V}$, $V_{\text{CC}} = 0\text{V}$, and $T_A = 25^\circ\text{C}$.

AC Test Circuit and Switching Time Waveforms

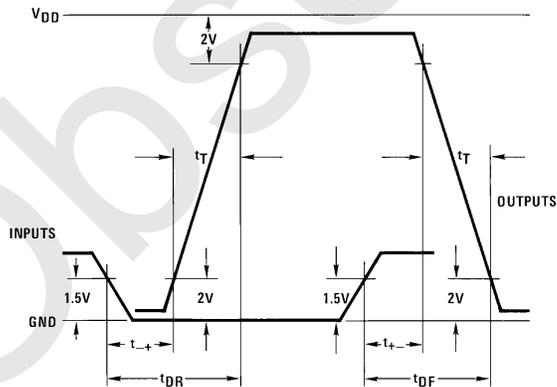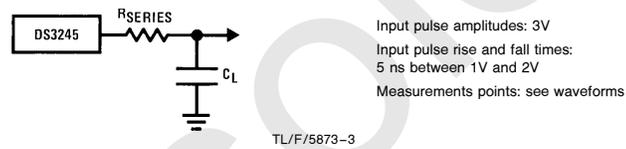


TL/F/5873-4

Physical Dimensions inches (millimeters)

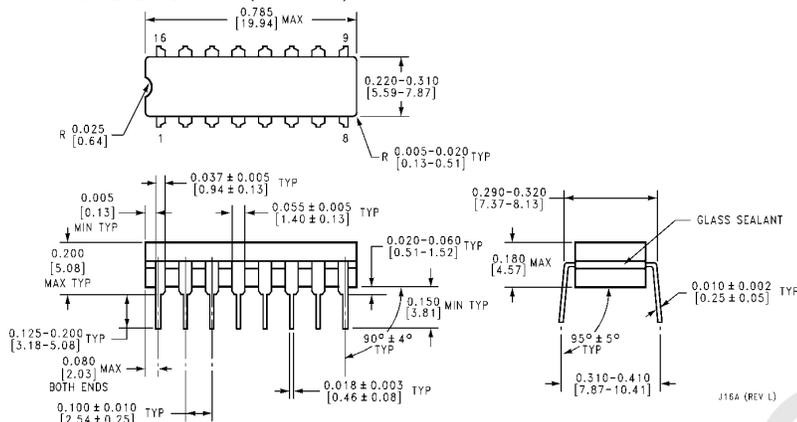

Ceramic Dual-in-Line Package (J)
Order Number DS3245J
NS Package Number J16A

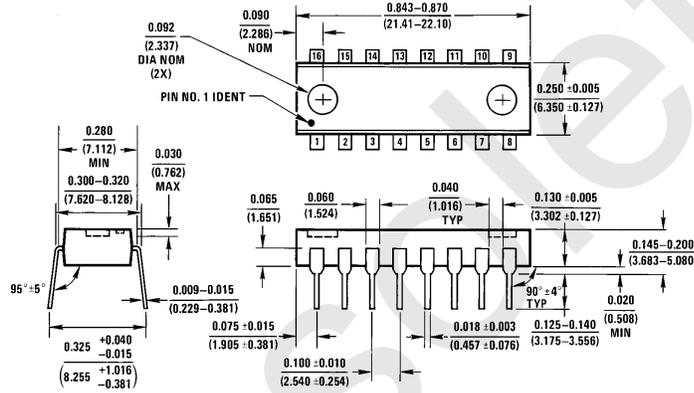

Molded Dual-in-Line Package (N)
Order Number DS3245N
NS Package Number N16A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: cnjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 19th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated