

## DS3647A Quad TRI-STATE<sup>®</sup> MOS Memory I/O Register

### General Description

The DS3647A is a 4-bit I/O buffer register intended for use in MOS memory systems. This circuit employs a fall-through latch for data storage. This method of latching captures the data in parallel with the output, thus eliminating the delays encountered in other designs. This circuit uses Schottky-clamped transistor logic for minimum propagation delay and employs PNP input transistors so that input currents are low, allowing a large fan-out for this circuit which is needed in a memory system.


Two pins per bit are provided, and data transfer is bi-directional so that the register can handle both input and output data. The direction of data flow is controlled through the input enables. The latch control, when taken low, will cause the register to hold the data present at that time and display it at the outputs. Data can be latched into the register independent of the output disables or EXPANSION input. Either or both of the outputs may be taken to the high-impedance state with the output disables. The EXPANSION pin disables both outputs to facilitate multiplexing with other I/O registers on the same data lines.

The DS3647A features TRI-STATE outputs. The "B" port outputs are designed for use in bus organized data transmission systems and can sink 80 mA and source -5.2 mA. Data going from port "A" to port "B" and from "B" to port "A" is inverted in the DS3647A.


### Features

- PNP inputs minimize loading
- Fall-through latch design
- Propagation delay of only 15 ns
- TRI-STATE outputs
- EXPANSION control
- Bi-directional data flow
- TTL compatible
- Transmission line driver output

### Logic and Connection Diagrams

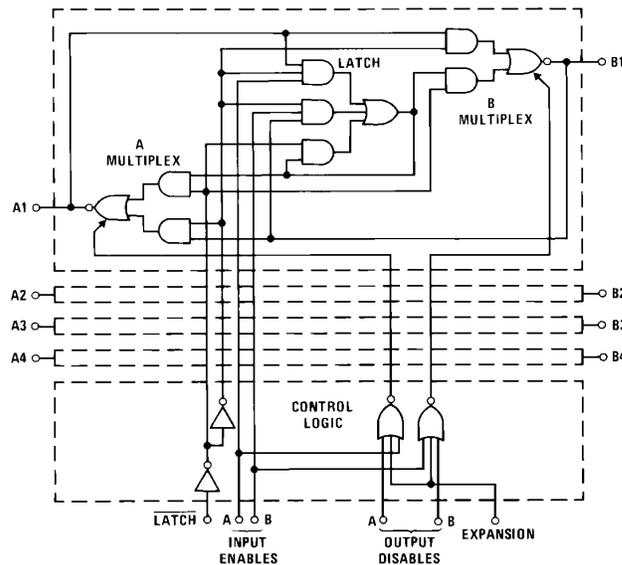

TL/F/8354-1

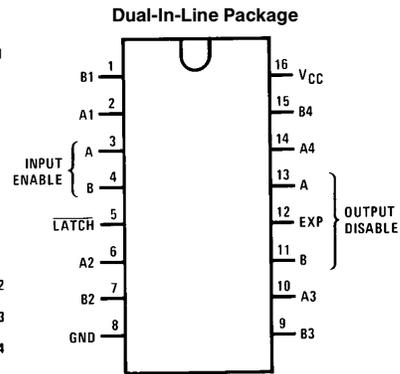

TL/F/8354-2

Top View

Order Number DS3647AD or DS3647AN  
See NS Package Number D16C or N16A

TRI-STATE<sup>®</sup> is a registered trademark of National Semiconductor Corp.

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	-1.5V to +7V
Storage Temperature Range	-65° to +150°C
Maximum Power Dissipation* at 25°C	
Molded Package	1476 mW
Lead Temperature (Soldering, 10 seconds)	300°C

\*Derate molded package 10.0 mW/°C above 25°C.

## Operating Conditions

	Min	Max	Units
Supply Voltage ( $V_{CC}$ )	4.5	5.5	V
Temperature ( $T_A$ )			
DS3647A	0	+70	°C

## Electrical Characteristics (Notes 2 and 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
$V_{IN(1)}$	Logic "1" Input Voltage		2.0			V	
$V_{IN(0)}$	Logic "0" Input Voltage				0.8	V	
$I_{IN(1)}$	Logic "1" Input Current	$V_{CC} = 5.5V, V_{IN} = 5.5V$	Latch, Disable Inputs		0.1	40	$\mu A$
			Expansion		0.2	80	$\mu A$
			A Ports, B Ports		0.2	100	$\mu A$
			Enable Inputs		0.4	200	$\mu A$
$I_{IN(0)}$	Logic "0" Input Current	$V_{CC} = 5.5V, V_{IN} = 0.5V$	Latch, Disable Inputs		-25	-250	$\mu A$
			Expansion		-50	-500	$\mu A$
			A Ports, B Ports		-50	-500	$\mu A$
			Enable, Inputs		-0.1	-1.25	mA
$V_{CLAMP}$	Input Clamp Voltage	$V_{CC} = 4.5V, I_{IN} = -18 mA$		-0.6	-1.2	V	
$V_{OL(A)}$	Logic "0" Output Voltage A Ports	$V_{CC} = 4.5V, I_{OL} = 20 mA$		0.4	0.5	V	
$V_{OL(B)}$	Logic "0" Output Voltage B Ports	$V_{CC} = 4.5V$	$I_{OL} = 30 mA$		0.3	0.4	V
			$I_{OL} = 50 mA$		0.4	0.5	V
$V_{OH(A)}$	Logic "1" Output Voltage A Ports	$I_{OH} = -1 mA$	$V_{CC} = 5V$	3.0	3.4		V
			$V_{CC} = 4.5V$	2.5	3.4		V
$V_{OH(B)}$	Logic "1" Output Voltage B Ports	$I_{OH} = -5.2 mA, (Note 4)$	$V_{CC} = 5V$	2.9	3.3		V
			$V_{CC} = 4.5V$	2.4	3.3		V
$I_{OS(A)}$	Output Short-Circuit Current A Port	$V_{CC} = 4.5V \text{ to } 5.5V, V_{OUT} = 0V, (Note 4)$	-50	-80	-120	mA	
$I_{OS(B)}$	Output Short-Circuit Current B Port	$V_{CC} = 4.5V \text{ to } 5.5V, V_{OUT} = 0V, (Note 4)$	-70	-120	-180	mA	
$I_{CC}$	Power Supply Current	Exp = 3V, A Ports = 0V, B Ports Open, All Other Pins = 0V	DS3647A		100	140	mA
		Enable A, Latch = 3V, A Ports = 0V, B Ports Open, All Other Pins = 0V	DS3647A		70	105	mA

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** Unless otherwise specified min/max limits apply across the 0°C to +70°C range. All typicals are given for  $V_{CC} = 5V$  and  $T_A = 25°C$ .

**Note 3:** All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted.

**Note 4:** Only one output at a time should be shorted.

## Switching Characteristics ( $V_{CC}=5V, T_A=25^{\circ}C$ )

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>DATA TRANSFER B PORT TO A PORT</b>						
$t_{pd0}$	Propagation Delay to a Logic "0"	$C_L = 50 \text{ pF}, R_L = 280\Omega$ , (Figures 1 and 4)		7.5	15	ns
$t_{pd1}$	Propagation Delay to a Logic "1"	$C_L = 50 \text{ pF}, R_L = 280\Omega$ , (Figures 1 and 4)		6.0	12	ns
<b>A PORT CONTROL FROM OUTPUT DISABLE A INPUT</b>						
$t_{LZ}$	Delay to High Impedance from Logic "0"	(Figures 1 and 5)		13	20	ns
$t_{HZ}$	Delay to High Impedance from Logic "1"	(Figures 1 and 6)		14	20	ns
$t_{ZL}$	Delay to Logic "0" from High Impedance	(Figures 1 and 7)		10	15	ns
$t_{ZH}$	Delay to Logic "1" from High Impedance	(Figures 1 and 8)		25	35	ns
<b>DATA TRANSFER A PORT TO B PORT, DS3647A</b>						
$t_{pd0}$	Propagation Delay to a Logic "0"	$C_L = 50 \text{ pF}, R_L = 100 \Omega$ , (Figures 2 and 4)		6.5	12	ns
$t_{pd1}$	Propagation Delay to a Logic "1"	$C_L = 50 \text{ pF}, R_L = 100 \Omega$ , (Figures 2 and 4)		8.0	15	ns
<b>B PORT CONTROL FROM OUTPUT DISABLE B INPUT, DS3647A</b>						
$t_{LZ}$	Delay to High Impedance from Logic "0"	(Figures 2 and 5)		15	25	ns
$t_{HZ}$	Delay to High Impedance from Logic "1"	(Figures 2 and 6)		14	20	ns
$t_{ZL}$	Delay to Logic "0" from High Impedance	(Figures 2 and 7)		10	16	ns
$t_{ZH}$	Delay to Logic "1" from High Impedance	(Figures 2 and 8)		25	35	ns
<b>LATCH SET-UP AND HOLD TIMES, ALL DEVICES</b>						
$t_{SET-UP}$	Set-Up Time of Data Input Before Latch Goes Low		5	0		ns
$t_{HOLD}$	Hold Time of Data Input After Latch Goes Low		10	5		ns

## Product Description

Device Number	B Port To A Port Function	A Port To B Port Function	A Port Outputs	B Port Outputs
DS3647A	Inverting	Inverting	TRI-STATE	TRI-STATE

## Truth Table

Input Enables		$\overline{\text{Latch}}$	Output Disables		Expansion	A Ports A1-A4	B Ports B1-B4	Comments
A	B		A	B				
1	0	1	0	0	0	Hi-Z	$\overline{\text{A}}$	Data in on A, output to B
0	1	1	0	0	0	$\overline{\text{B}}$	Hi-Z	Data in on B, output to A
1	0	0	0	0	0	Hi-Z	$\overline{\text{A}}$	Data stored which is present when latch goes low
0	1	0	0	0	0	$\overline{\text{B}}$	Hi-Z	Data stored which is present when $\overline{\text{latch}}$ goes low
1	0	x	0	1	0	Hi-Z	Hi-Z	Both A and B in Hi-Z state, Data in on A, may be latched
0	1	x	1	0	0	Hi-Z	Hi-Z	Both A and B in Hi-Z state, Data in on B, may be latched
x	x	x	x	x	1	Hi-Z	Hi-Z	Both A and B in Hi-Z state

## AC Test Circuits

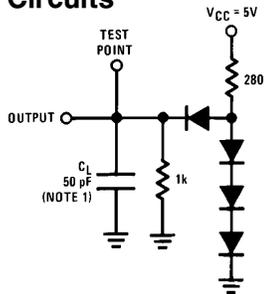


FIGURE 1. A Port Load

TL/F/8354-3


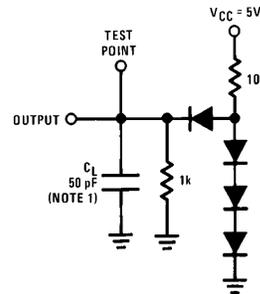


FIGURE 2. B Port Load


TL/F/8354-4

Note 1:  $C_L$  includes probe and jig capacitance.

## Operating Waveforms

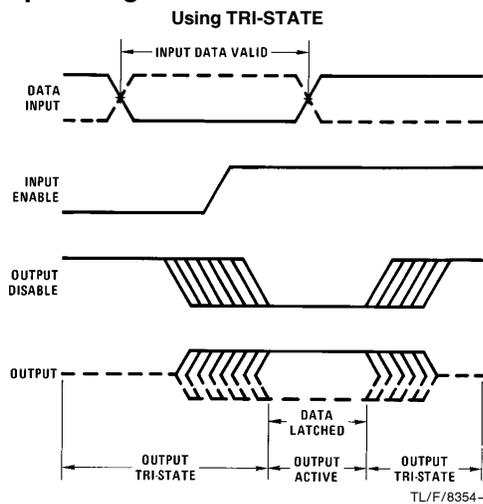


TL/F/8354-5

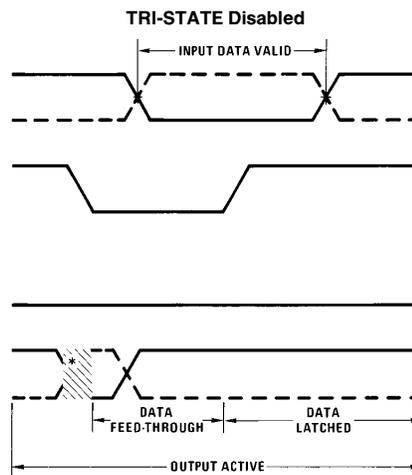

TL/F/8354-6

\*When the Input Enable makes a negative transition, the output will be indeterminate for a short duration. The negative transition of the Input Enable normally occurs during a don't-care timing state at the output.

## Switching Time Waveforms

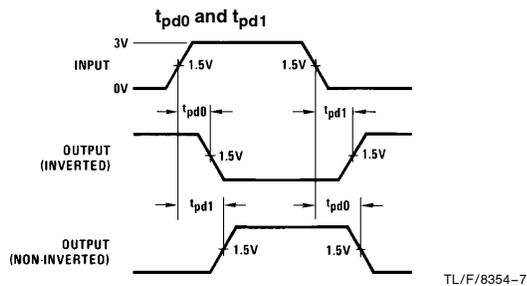

Input Characteristics:  $f = 1 \text{ MHz}$ ,  $t_R = t_F \leq 5 \text{ ns}$  (10% to 90% points), duty cycle = 50%,  $Z_{OUT} = 50 \Omega$

FIGURE 4

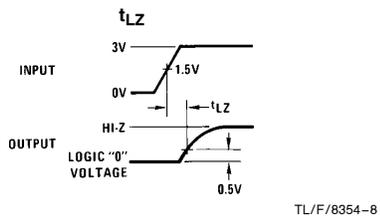


FIGURE 5

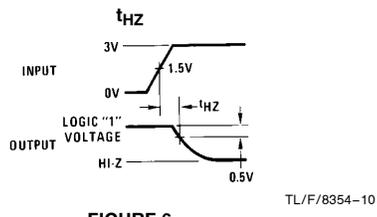


FIGURE 6

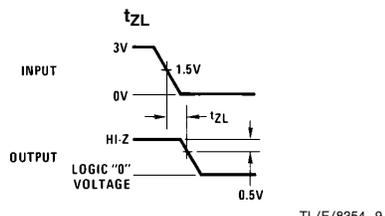


FIGURE 7


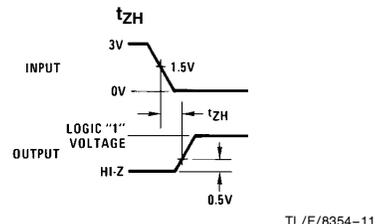


FIGURE 8


## Schematic Diagram

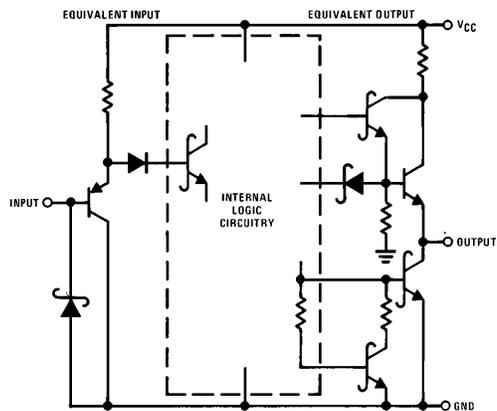

**Note.** Data pins A1-A4 and B1-B4 consist of an input and an output tied together.

# Typical Application


The diagram below shows how the DS3647A can be used as a register capable of multiplexing data lines.

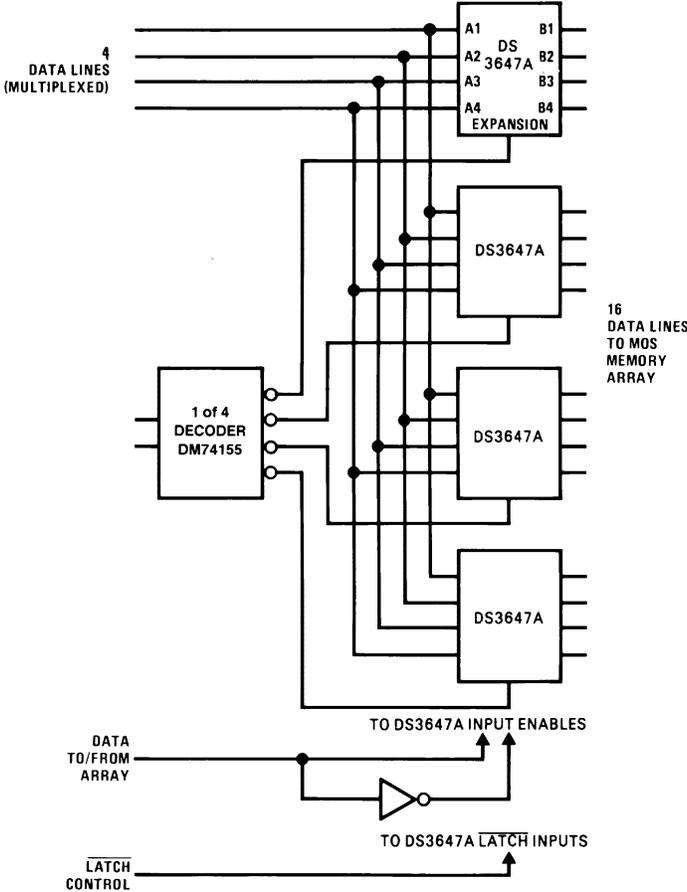

TL/F/8354-13



**Physical Dimensions** inches (millimeters) (Continued)

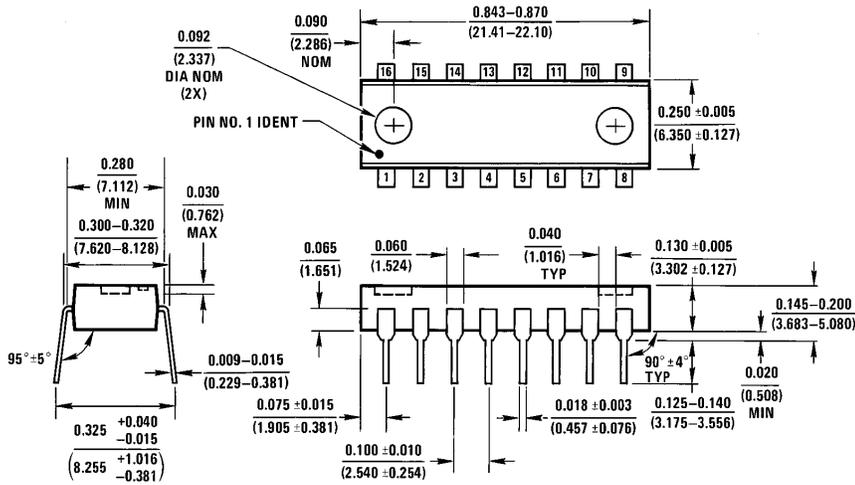

**Molded Dual-In-Line Package (N)**  
**Order Number DS3647AN**  
**NS Package N16A**

N16A (REV E)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.