

SN75439 QUADRUPLE PERIPHERAL DRIVER

SLRS013A – MAY 1988 – REVISED NOVEMBER 1989


- 1.3-A Current Capability Each Channel
- Saturating Outputs With Low On-State Resistance
- Two Inverting and Two Noninverting Driver Channels With Common Active-Low Enable Input
- Key Application Is as a Complete Full-Step 4-Phase DC Stepper Motor Driver Using Only Three Directly Connected Logic Control Signal Lines From Standard Microprocessors
- High-Impedance Inputs Compatible With TTL or CMOS Levels
- Very Low Standby Power . . . 10 mW Typ
- 50-V Noninductive Switching Voltage Capability
- 40-V Inductive Switching Voltage Capability
- Output Clamp Diodes for Inductive Transient Protection
- 2-W Power Package

description


The SN75439 quadruple peripheral driver is designed for use in systems requiring high current, high voltage, and high load power. The device features two inverting and two noninverting open-collector outputs with a common-enable input that, when taken high, disables all four outputs. By pairing each inverting channel with a corresponding noninverting channel (such as channel 1 paired with channel 2 and channel 3 paired with channel 4), the device may be used as a complete full-step 4-phase dc stepper-motor driver using only two input logic control signals plus the enable signal, as shown in Figure 3. Other applications include driving relays, lamps, solenoids, motors, LEDs, transmission lines, hammers, and other high-power-demand loads.

The SN75439 is characterized for operation from 0°C to 70°C.

NE PACKAGE
(TOP VIEW)

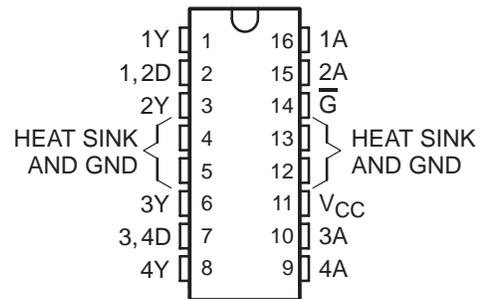

logic symbol†

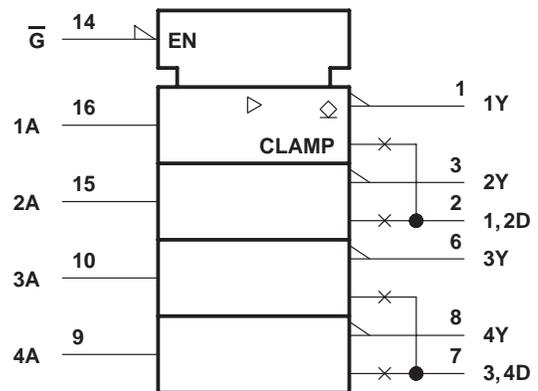

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC publication 617-12.

Function Tables

EACH CHANNEL 1 OR CHANNEL 4 DRIVER

INPUTS		OUTPUT
A	G-bar	Y
H	L	L
L	X	H
X	H	H

EACH CHANNEL 2 OR CHANNEL 3 DRIVER


INPUTS		OUTPUT
A	G-bar	Y
L	L	L
H	X	H
X	H	H

H = high level, L = low level X = irrelevant


SN75439 QUADRUPLE PERIPHERAL DRIVER

SLRS013A – MAY 1988 – REVISED NOVEMBER 1989

logic diagram (positive logic)

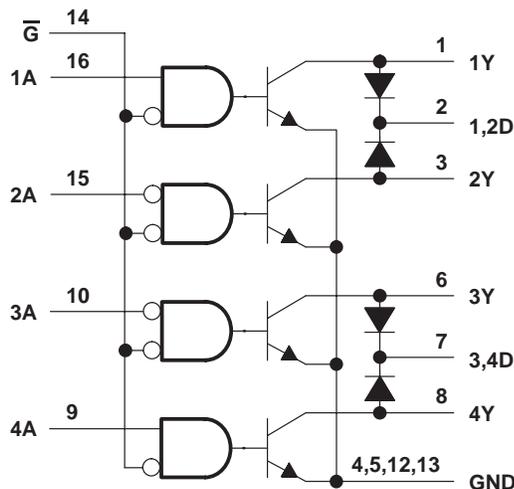

schematics of inputs and outputs

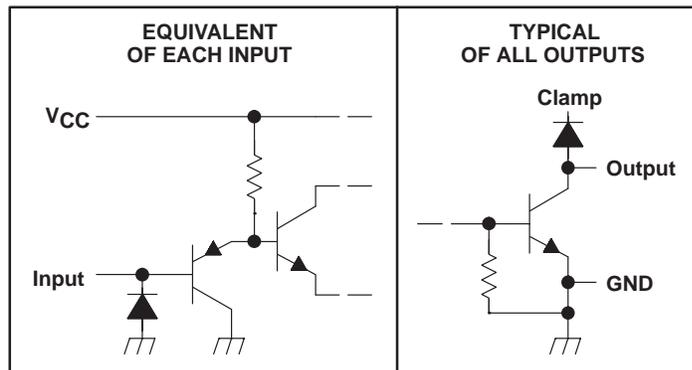

absolute maximum ratings over operating temperature range (unless otherwise noted)

Supply voltage range, V_{CC} (see Note 1)	–0.3 V to 7 V
Input voltage, V_I	7 V
Output voltage range, V_O	–0.3 V to 52 V
Output voltage, V_O (inductive load)	43 V
Output clamp-diode terminal voltage range, V_{OK}	–0.3 V to 52 V
Input current, I_I	–15 mA
Peak sink output current, I_{OM} (nonrepetitive, $t_w \leq 0.1$ ms) (see Note 2)	1.5 A
(repetitive, $t_w \leq 10$ ms, duty cycle $\leq 50\%$)	1.4 A
Continuous sink output current, I_O (see Note 2)	1.3 A
Peak output clamp diode current, I_{OKM} (nonrepetitive, $t_w \leq 0.1$ ms) (see Note 2)	1.5 A
(repetitive, $t_w \leq 10$ ms, duty cycle $\leq 50\%$)	1.3 A
Continuous total dissipation at (or below) 25°C free-air temperature (see Note 3)	2075 mW
Continuous total dissipation at (or below) 65°C case temperature (see Note 3)	5000 mW
Operating case or virtual junction temperature range	–55°C to 150°C
Storage temperature range	–65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

- NOTES:
- All voltage values are with respect to the network GND (unless otherwise specified).
 - All four channels of this device may conduct rated current simultaneously; however, power dissipation average over a short time interval must fall within the continuous dissipation range.
 - For operation above 25°C free-air temperature, derate linearly at the rate of 16.6 mW/°C. For operation above 65°C case temperature, derate linearly at the rate of 59 mW/°C. To avoid exceeding the design maximum virtual junction temperature, these ratings should not be exceeded.

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC}	4.75	5	5.25	V
Output supply voltage in inductive switching circuit, V_S (see Figure 2)			40	V
High-level input voltage, V_{IH}	2		5.25	V
Low-level input voltage, V_{IL}	-0.3†		0.8	V
Low-level output current, I_{OL}			1.3	A
Operating free-air temperature, T_A	0	25	70	°C

† The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for logic voltage levels.

electrical characteristics over recommended ranges of operating free-air temperature and supply voltages (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP†	MAX	UNIT
V_{IK}	Input clamp voltage	$I_I = -12$ mA		-0.9	-1.5		V
V_{OL}	Low-level output voltage		See Note 4	$I_{OL} = 0.5$ A	0.2	0.35	V
				$I_{OL} = 1$ A	0.4	0.7	
				$I_{OL} = 1.3$ A	0.5	0.9	
$V_{F(K)}$	Output clamp-diode forward voltage		See Note 4	$I_F = 0.5$ A	1.1	1.9	V
				$I_F = 1$ A	1.3	2.2	
				$I_F = 1.3$ A	1.4	2.4	
I_{OH}	High-level output current	$V_{OH} = 50$ V,	$V_{OK} = 50$ V			100	μA
I_{IH}	High-level input current	$V_I = V_{IH}$				10	μA
I_{IL}	Low-level input current	$V_I = 0$ to 0.8 V				-10	μA
$I_{R(K)}$	Output clamp-diode reverse current (at Y output)	$V_R = 50$ V,	$V_O = 0$			100	μA
I_{CC}	Supply current			All outputs at high level (off)	2	8	mA
				All outputs at low level (on)	140	200	
				Two outputs at high level (off) and two outputs at low level (on)	70	110	

† All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

NOTE 4: These parameters must be measured using pulse techniques, $t_w = 1$ ms, duty cycle $\leq 10\%$.



switching characteristics, $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low-to-high-level output	$I_{OL} \approx 1$ A, $R_L = 30 \Omega$,	$C_L = 30$ pF, See Figure 1		1500		ns
t_{PHL}	Propagation delay time, high-to-low-level output				100		ns
t_{TLH}	Transition time, low-to-high-level output				170		ns
t_{THL}	Transition time, high-to-low-level output				50		ns
V_{OH}	High-level output voltage (after switching inductive load)	$V_S = 40$ V, $R_L = 31 \Omega$,	$I_O \approx 1.3$ A, See Figure 2	$V_S - 100$			mV

SN75439 QUADRUPLE PERIPHERAL DRIVER

SLRS013A – MAY 1988 – REVISED NOVEMBER 1989

PARAMETER MEASUREMENT INFORMATION

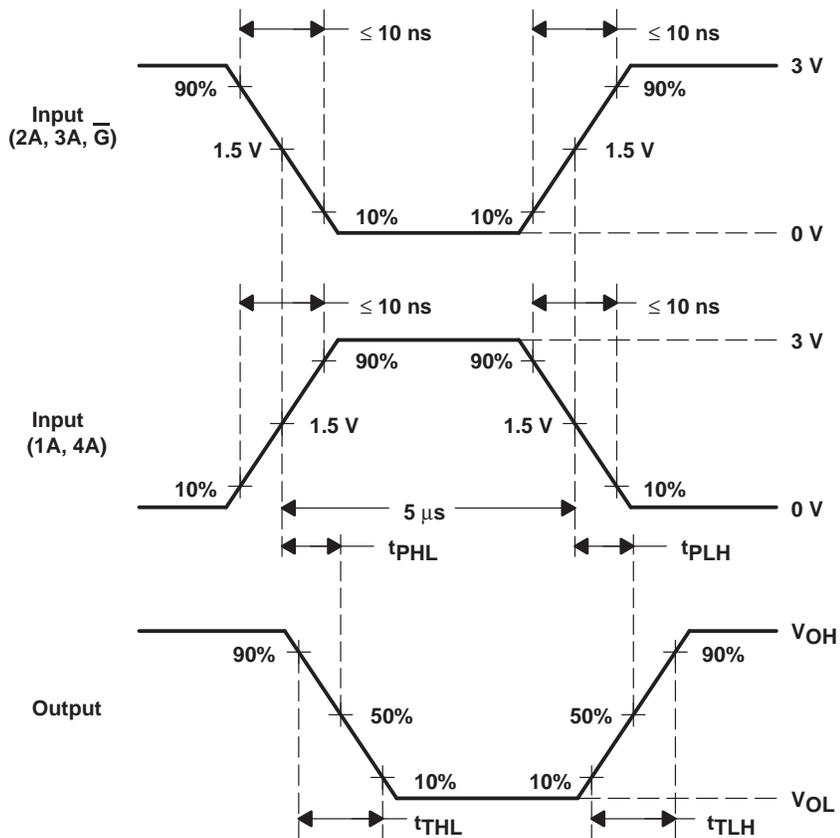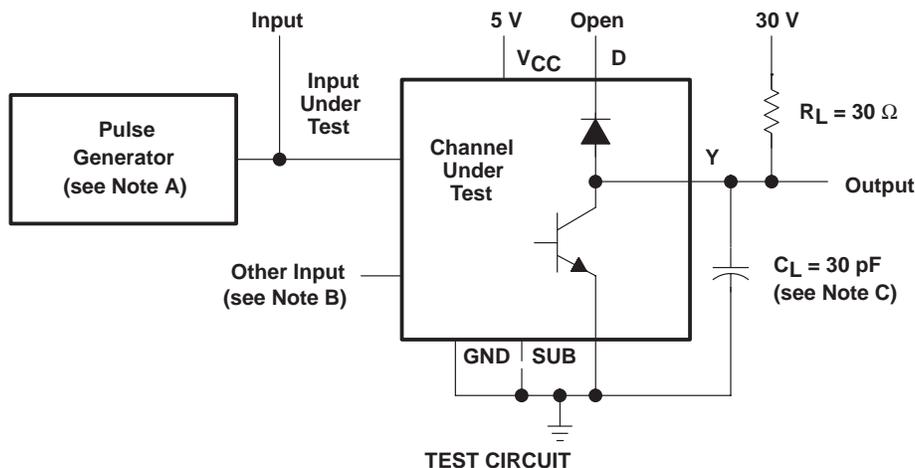



VOLTAGE WAVEFORMS

- NOTES: A. The pulse generator has the following characteristics: duty cycle $\leq 1\%$, $Z_O = 50\ \Omega$.
 B. Enable input \bar{G} is at 0 V if input A is used as the switching input. When \bar{G} is used as the switching input, the corresponding A input is at 0 V if testing channel 2 or channel 3 or at 3 V if testing channel 1 or channel 4.
 C. C_L includes probe and jig capacitance.

Figure 1. Test Circuit and Voltage Waveforms, Switching Characteristics



PARAMETER MEASUREMENT INFORMATION

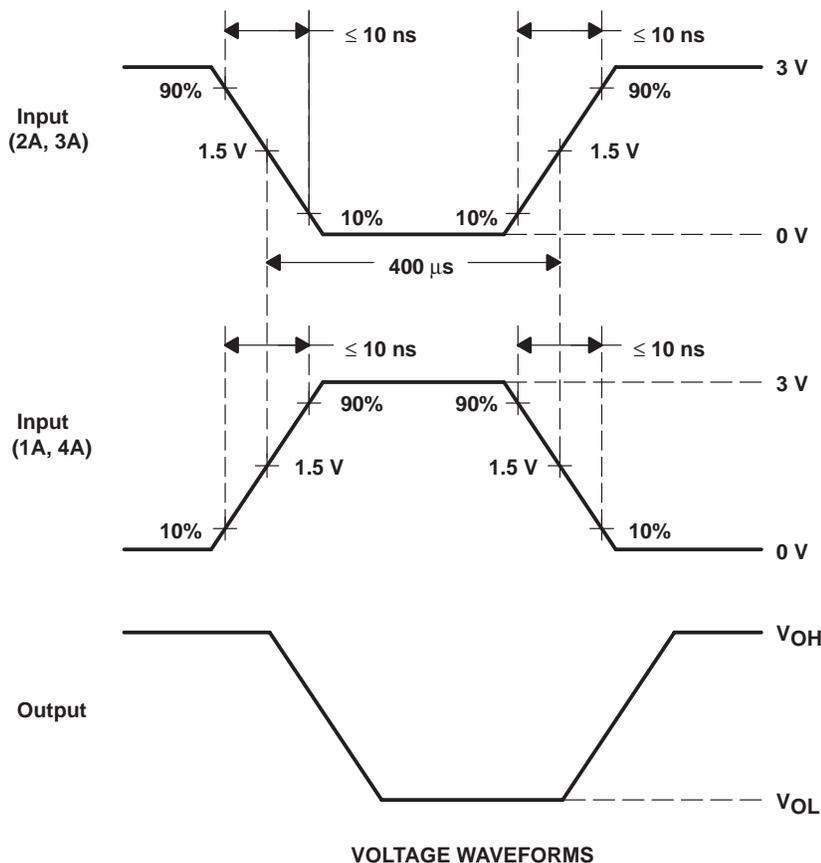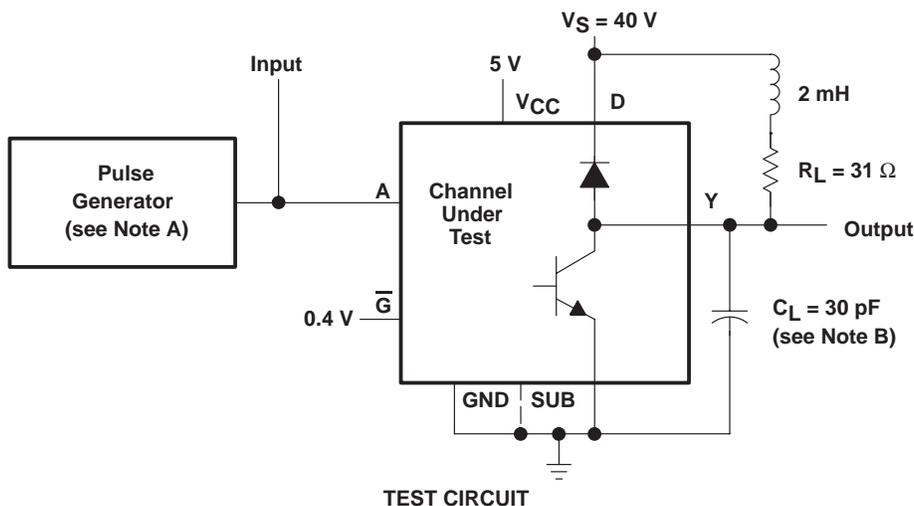

NOTES: A. The pulse generator has the following characteristics: duty cycle ≤ 1 %, $Z_0 = 50 \Omega$.
 B. C_L includes probe and jig capacitance.

Figure 2. Output Latch-Up Test Circuit and Voltage Waveforms

SN75439 QUADRUPLE PERIPHERAL DRIVER

SLRS013A – MAY 1988 – REVISED NOVEMBER 1989

APPLICATION INFORMATION

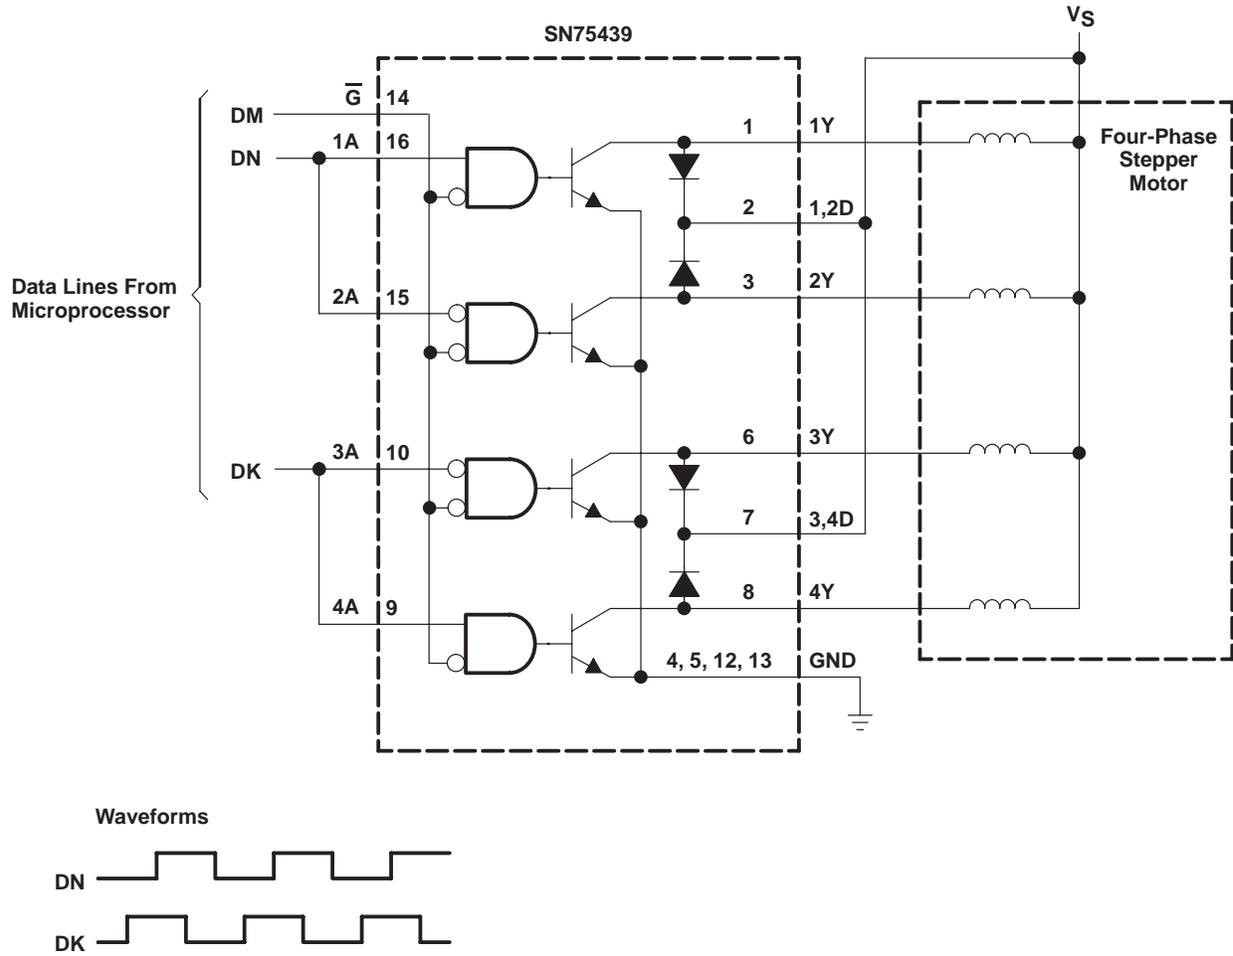


Figure 3. Full-Step Four-Phase Stepper-Motor Driver

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
SN75439NE	OBSOLETE	PDIP	NE	16		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

NE (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

20 PIN SHOWN

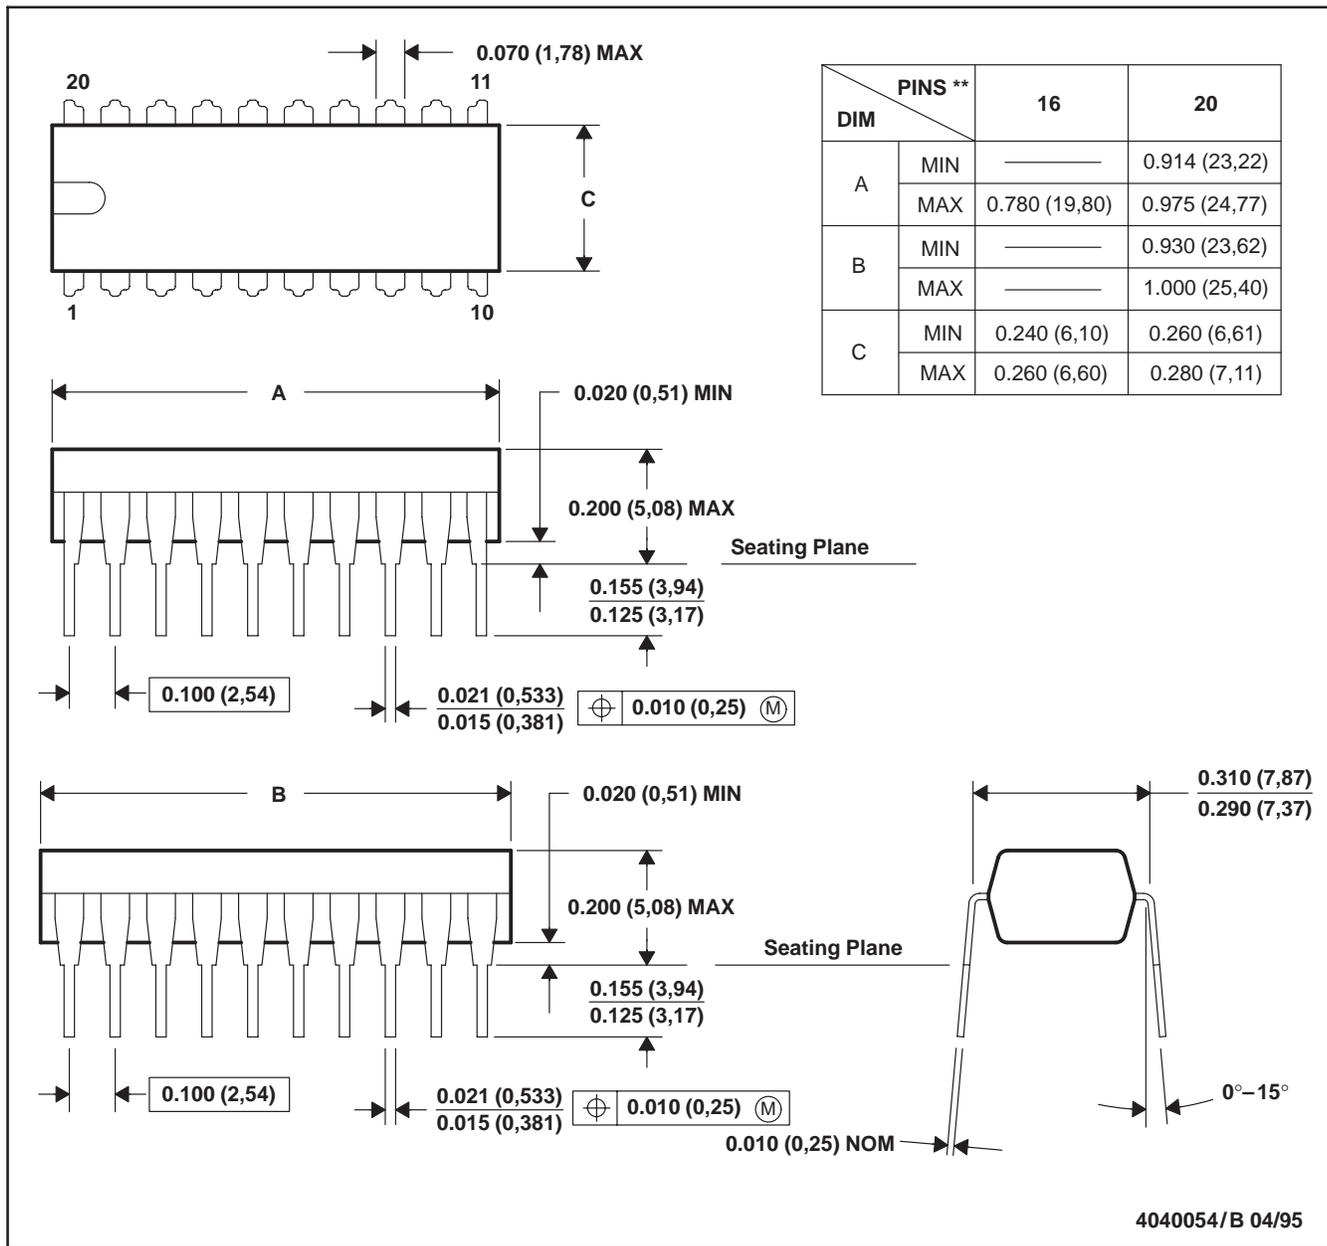

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Falls within JEDEC MS-001 (16 pin only)

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated