

CLC5644

CLC5644 Low Power, Low Cost, Quad Operational Amplifier



Literature Number: SNOS911C

CLC5644

Low Power, Low Cost, Quad Operational Amplifier

General Description

The CLC5644 is a quad, current feedback operational amplifier that is perfect for many cost sensitive applications that require high performance, especially when power dissipation is critical. Not only does the CLC5644 offer excellent economy in board space, but has an excellent performance vs power tradeoff which yields a 170MHz Small Signal Bandwidth while dissipating only 25mW. Applications requiring significant density of high speed devices such as video routers, matrix switches and high order active filters will benefit from the configuration of the CLC5644 and the low channel-to-channel crosstalk of 76dB at 1MHz.

The CLC5644 provides excellent performance for video applications. Differential gain and phase of 0.04% and 0.07° makes this device well suited for many professional composite video systems, but consumer applications will also be able to take advantage of these features due to the device's low cost. The CLC5644 offers superior dynamic performance with a small signal bandwidth of 170MHz and slew rate of 1000V/μs. These attributes are well suited for many component video applications such as driving RGB signals down significant lengths of cable. These and many other applications can also take advantage of the 0.1dB flatness to 25MHz.


Combining wide bandwidth with low cost makes the CLC5644 an attractive option for active filters. SAW filters are often used in IF filters in the 10's of MHz range, but higher order filters designed around a quad operational amplifier may offer an economical alternative to the typical SAW approach and offer greater freedom in the selection of filter parameters. National Semiconductor's Comlinear Products Group has published a wide array of literature on active filters and a list of these publications can be found on the last page of this datasheet.

- 1000 V/us slew rate
- 2.5mA/channel supply current
- -72/-79dBc HD2/HD3 (5MHz)
- 0.04%, 0.07° differential gain, phase
- 70mA output current
- 16ns settling to 0.1%

Applications

- Portable equipment
- Video switchers & routers
- Video line driver
- Active filters
- IF amplifier
- Twisted pair driver/receiver


Non-Inverting Frequency Response

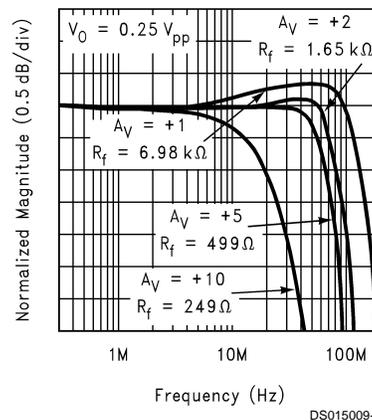

Features


- 170MHz small signal bandwidth

Connection Diagram

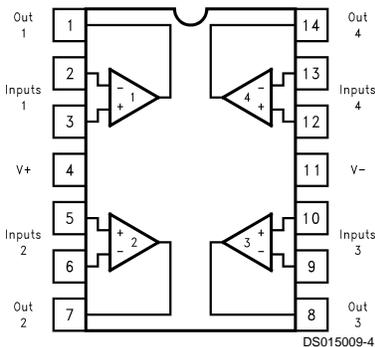


Pinout
DIP & SOIC

Typical Configurations

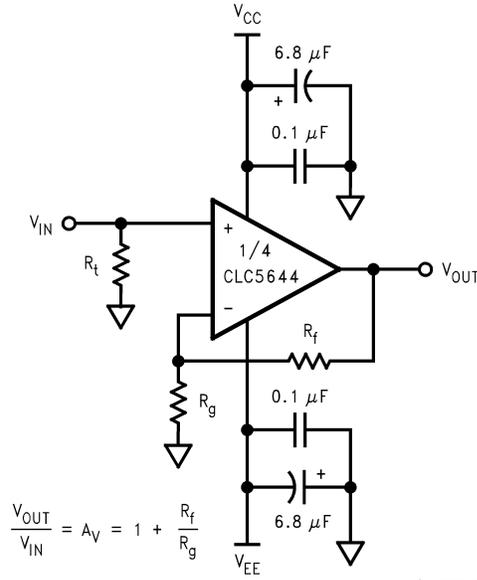

Non-Inverting Gain

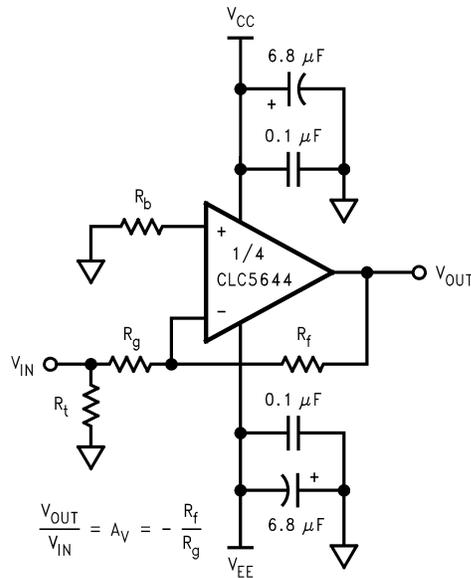

Note: R_b provides DC bias for the non-inverting input. Select R_t to yield desired $R_{in} = R_t \parallel R_g$.

Inverting Gain

Ordering Information

Package	Temperature Range Industrial	Part Number	Package Marking	NSC Drawing
14-pin plastic DIP	-40°C to +85°C	CLC5644IN	CLC5644IN	N14A
14-pin plastic SOIC	-40°C to +85°C	CLC5644IM	CLC5644IM	M14A
		CLC5644IMX	CLC5644IM	

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage ($V_{CC}-V_{EE}$)	+14V
Output Current	95mA
Common-Mode Input Voltage	V_{EE} to V_{CC}
Maximum Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C

Lead Temperature (soldering 10 sec)

+300°C

Operating Ratings

Thermal Resistance		
Package	(θ_{JC})	(θ_{JA})
MDIP	60°C/W	110°C/W
SOIC	55°C/W	125°C/W

Electrical Characteristics

($A_V = +2$, $R_f = 1.65k\Omega$, $R_L = 100\Omega$, $V_S = \pm 5V$, unless specified)

Parameter	Conditions	Typ	Min/Max Ratings (Note 2)		Units
Ambient Temperature	CLC5644IN/IM	+25°C	+25°C	-40 to 85°C	
Frequency Domain Response					
-3dB Bandwidth	$A_V = 1$	170	-	-	MHz
	$V_O < 0.5V_{PP}$	125	-	-	MHz
	$V_O < 5V_{PP}$	50	-	-	MHz
-0.1dB Bandwidth		25	-	-	MHz
Differential Gain	NTSC, $R_L = 150\Omega$	0.04			dB
Differential Phase	NTSC, $R_L = 150\Omega$	0.07			dB
Time Domain Response					
Rise and Fall Time	0.5V Step	2.7	-	-	ns
	5V Step	7	-	-	ns
Settling Time to 0.01%	1V Step	16	-	-	ns
Overshoot	0.5V Step	4	-	-	%
Slew Rate		1000	-	-	V/ μ s
Distortion And Noise Response					
2nd Harmonic Distortion	$2V_{PP}, 1MHz$	-72	-	-	dBc
3rd Harmonic Distortion	$2V_{PP}, 1MHz$	-79	-	-	dBc
Equivalent Input Noise					
Voltage (e_{ni})	>1MHz	4.5	-	-	nV/ \sqrt{Hz}
Non-Inverting Current (i_{bn})	>1MHz	1.5	-	-	pA/ \sqrt{Hz}
Inverting Current (i_{bi})	>1MHz	10	-	-	pA/ \sqrt{Hz}
Crosstalk (Input Referred)	10MHz	76	-	-	dB
Static, DC Performance					
Input Offset Voltage (Note 3)		2.5	7	15	mV
Average Drift		25	-	90	μ V/°C
Input Bias Current (Non-Inverting)(Note 3)		2	6	10	μ A
Average Drift		15	-	80	nA/°C
Input Bias Current (Inverting)(Note 3)		2.5	7.5	22	μ A
Average Drift		24	-	150	nA/°C
Power Supply Rejection Ratio	DC	50	46	44	dB
Common Mode Rejection Ratio	DC	50	45	43	dB
Supply Current (per amplifier)(Note 3)	$R_L = \infty$	2.5	3	3	mA

Electrical Characteristics (Continued)

($A_V = +2$, $R_f = 1.65k\Omega$, $R_L = 100\Omega$, $V_S = \pm 5V$, unless specified)

Parameter	Conditions	Typ	Min/Max Ratings (Note 2)		Units
Miscellaneous Performance					
Input Resistance (Non-Inverting)		2	1	0.5	M Ω
Input Capacitance (Non-Inverting)		1	2	2	pF
Common-Mode Input Range		± 2.2	± 2.0	± 1.4	V
Output Voltage Range	$R_L = 150\Omega$	± 2.8	± 2.6	± 2.5	V
Output Current		70	50	30	mA
Output Resistance, Closed Loop	DC	0.2	0.3	0.6	m Ω


Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" specifies conditions of device operation.

Note 2: Min/max ratings are based on product characterization and simulation. Individual parameters are tested as noted. Outgoing quality levels are determined from tested parameters.

Note 3: AJ-level: spec. is 100% tested at +25°C.


Typical Performance Characteristics ($A_V = +2$, $R_f = 1.65k\Omega$, $R_L = 100\Omega$, $V_S = +5V$)

Non-Inverting Frequency Response

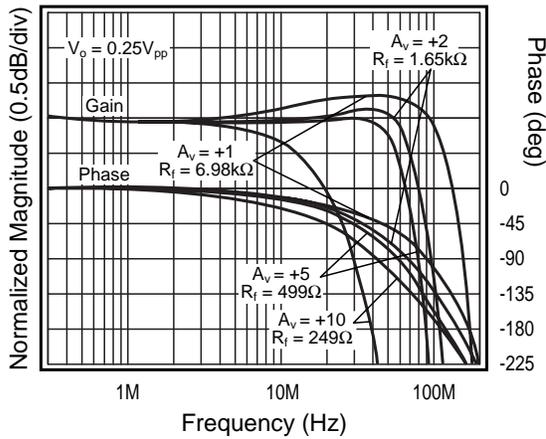


DS015009-5

Inverting Frequency Response

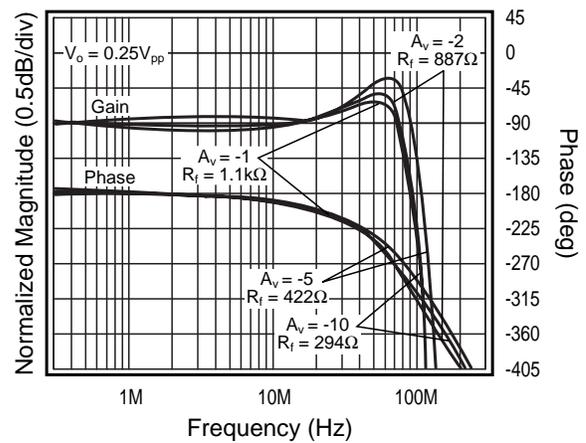


DS015009-6

Frequency Response vs. R_L

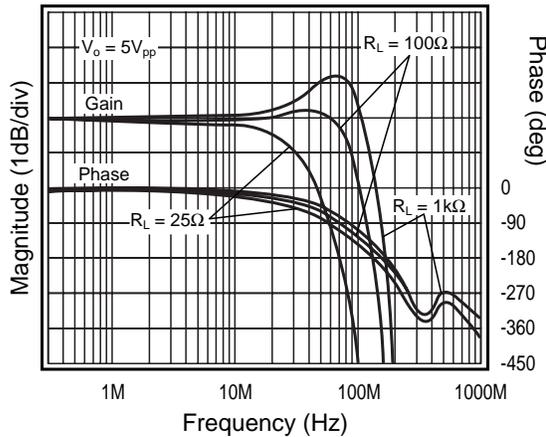

DS015009-7


Frequency Response vs. V_o

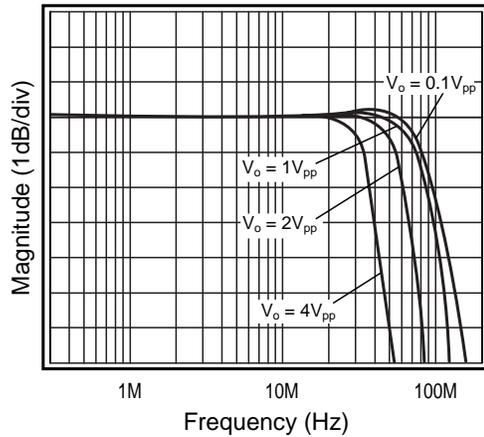

DS015009-8


Typical Performance Characteristics ($A_V = +2$, $R_f = 1.65k\Omega$, $R_L = 100\Omega$, $V_S = +5V$) (Continued)

2nd & 3rd Harmonic Distortion

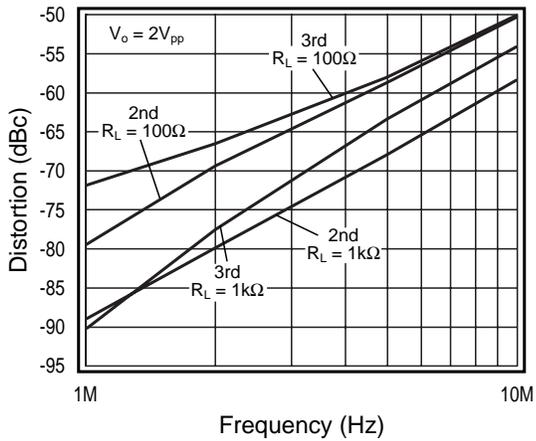


DS015009-9

2nd & 3rd Harmonic Distortion, $R_L = 25\Omega$

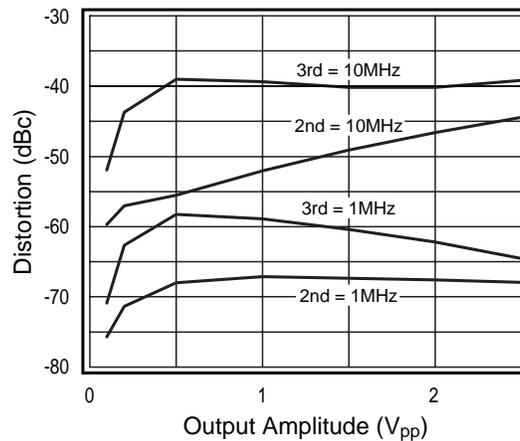


DS015009-10

2nd & 3rd Harmonic Distortion, $R_L = 100\Omega$

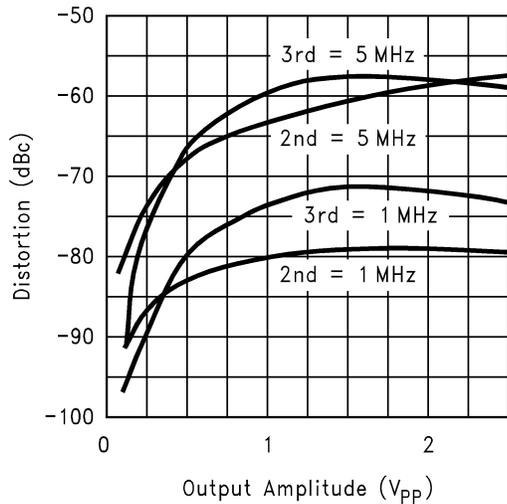


DS015009-11

2nd & 3rd Harmonic Distortion, $R_L = 1k\Omega$

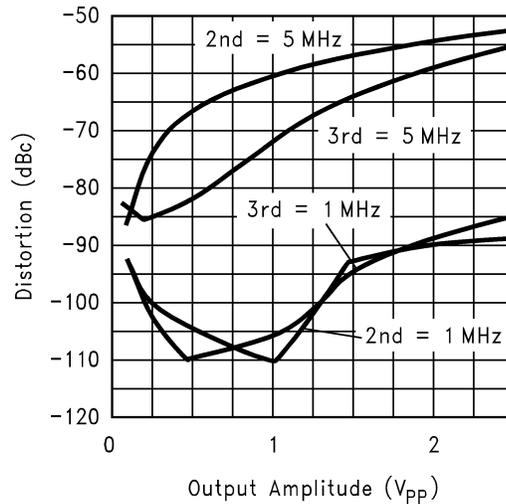


DS015009-12

Small Signal Pulse Response

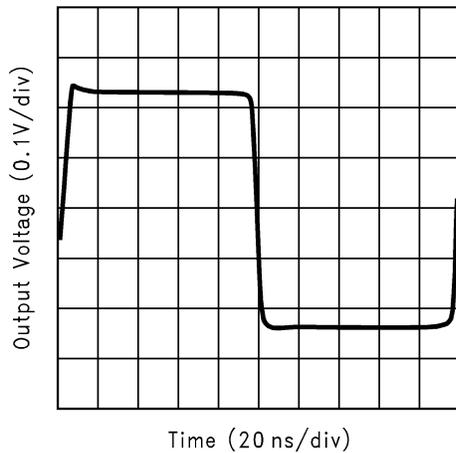

DS015009-13


Large Signal Pulse Response

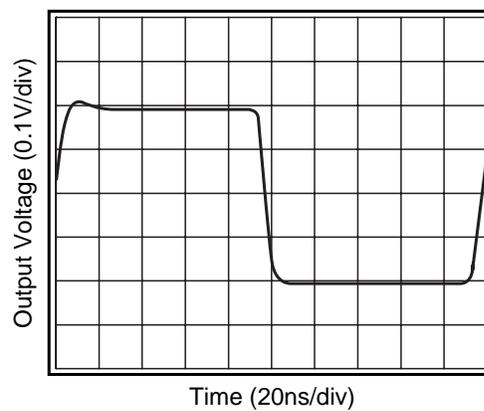

DS015009-14


Typical Performance Characteristics ($A_V = +2$, $R_f = 1.65k\Omega$, $R_L = 100\Omega$, $V_S = +5V$) (Continued)

Most Susceptible Channel Pulse Coupling

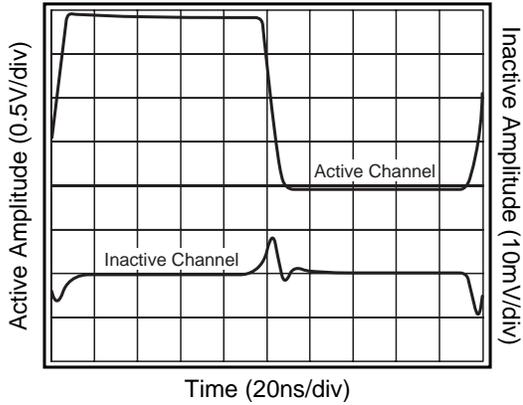


DS015009-15

Channel to Channel Gain Matching

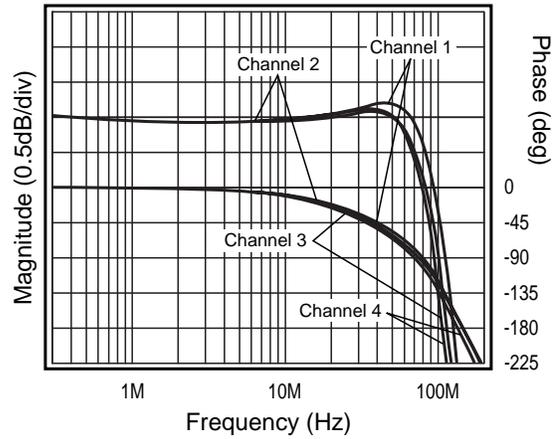


DS015009-16

Equivalent Input Noise

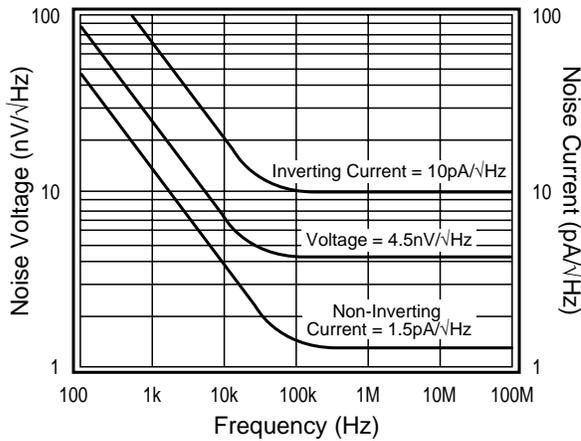


DS015009-17

Open-Loop Transimpedance Gain, Z(s)

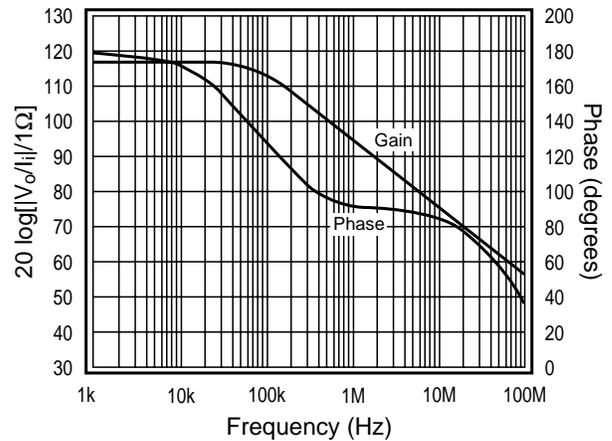

DS015009-18

PSRR and CMRR

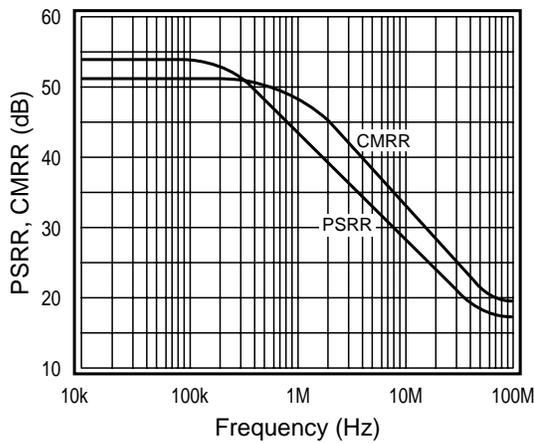

DS015009-19

Application Division

Current Feedback Amplifiers

Some of the key features of current feedback technology are:

- Independence of AC bandwidth and voltage gain
- Inherently stable at unity gain
- Adjustable frequency response with R_f
- High slew rate
- Fast settling

Current feedback operation can be described using a simple equation. The voltage gain for a non-inverting or inverting current feedback amplifier is approximated by Equation 1.

$$\frac{V_o}{V_i} = \frac{A_v}{1 + \frac{R_f}{Z(j\omega)}} \quad (1)$$

where:

A_v is the closed loop DC voltage gain

R_f is the feedback resistor

$Z(j\omega)$ is the open loop transimpedance gain

The denominator of Equation 1 is approximately equal to 1 at low frequencies. Near the -3dB corner frequency, the interaction between R_f and $Z(j\omega)$ dominates the circuit performance. The value of the feedback resistor has a large affect on the circuits performance. Increasing R_f has the following affects:

- Decreases loop gain
- Decreases bandwidth
- Reduces gain peaking
- Lowers pulse response overshoot

- Affects frequency response phase linearity

Layout Considerations

A proper printed circuit layout is essential for achieving high frequency performance. National provides evaluation boards for the CLC5644 (CLC730024-DIP, CLC730031-SOIC) and suggests their use as a guide for high frequency layout and as an aid for device testing and characterization. General layout and supply bypassing play major roles in high frequency performance. Follow these steps below as a basis for high frequency layout:

- Include 6.8 μF tantalum and 0.1 μF ceramic capacitors on both supplies.
- Place the 6.8 μF capacitors within 0.75 inches of the power pins.
- Place the 0.1 μF capacitors less than 0.1 inches from the power pins.
- Remove the ground plane under and around the part, especially near the input and output pins to reduce parasitic capacitance.
- Minimize all trace lengths to reduce series inductances.
- Use flush-mount printed circuit board pins for prototyping, never use high profile DIP sockets.

Active Filter Application Notes

OA-21 Simplified Component Pre-Distortion for High Speed Active Filters





OA-26 Designing High-Speed Active Filters

OA-27 Low-Sensitivity, Lowpass Filter Design

OA-28 Low-Sensitivity, Bandpass Filter Design with Tuning Method




OA-29 Low-Sensitivity, Highpass Filter Design with Parasitic Compensation

Physical Dimensions inches (millimeters) unless otherwise noted

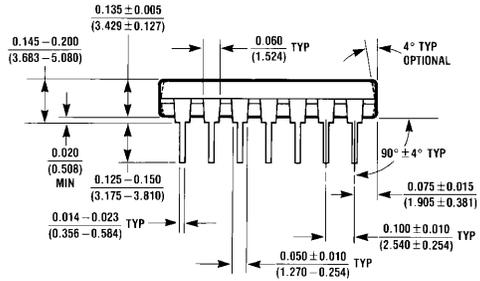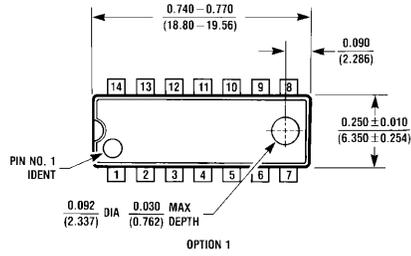

N14A (REV F)

**14-Pin MDIP
NS Package Number N14A**

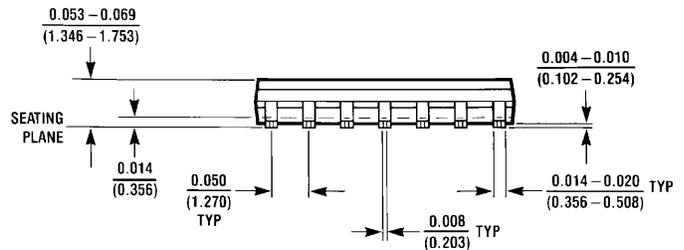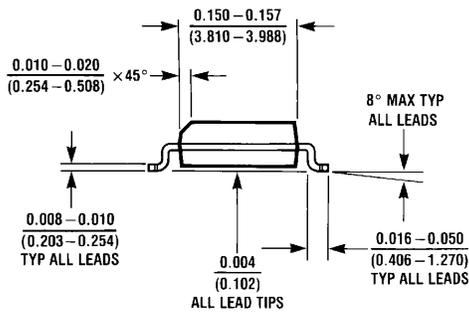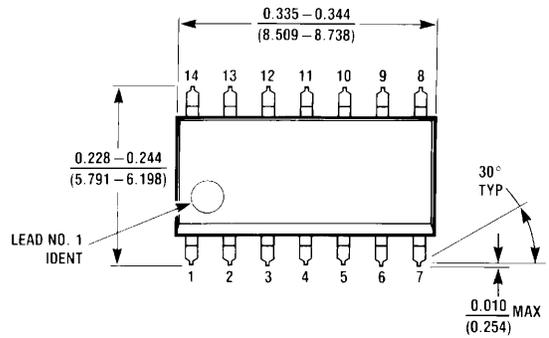

M14A (REV H)

**14-Pin SOIC
NS Package Number M14A**

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Email: support@nsc.com

www.national.com

National Semiconductor Europe

Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group

Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.

Tel: 81-3-5639-7560
Fax: 81-3-5639-7507

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated