




DUAL DIFFERENTIAL COMPARATOR

The KA293 series consists of two independent voltage comparators designed to operate from a single power supply over a wide voltage range.

FEATURES

- Single Supply Operation: 2V to 36V
- Dual Supply Operation:  $\pm 1V$  to  $\pm 18V$
- Allow Comparison of Voltages Near Ground Potential
- Low Current Drain 800  $\mu A$  Typ
- Compatible with all Forms of Logic
- Low Input Bias Current 25nA Typ
- Low Input Offset Current  $\pm 5nA$  WP
- Low Offset Voltage  $\pm 1mV$  Typ


BLOCK DIAGRAM

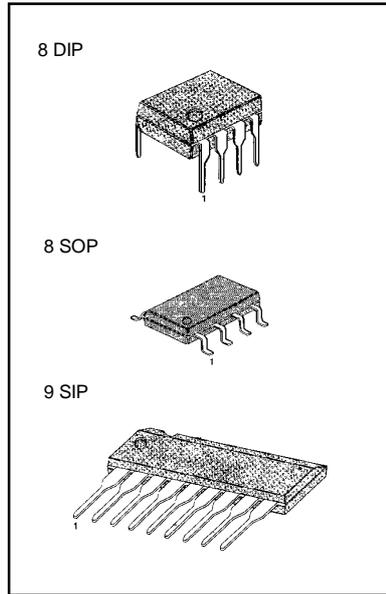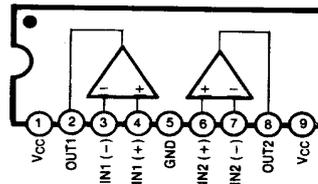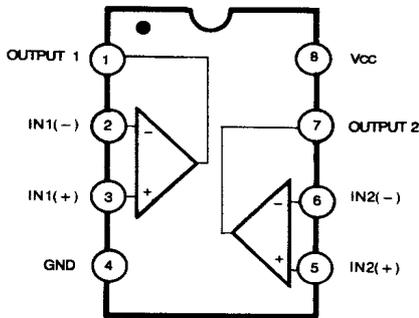

ORDERING INFORMATION

Device	Package	Operating Temperature
KA393 KA393A	8 DIP	0 ~ + 75°C
KA393S KA393AS	9 SIP	
KA393D KA393AD	8 SOP	
KA293 KA293A	8 DIP	
KA293S KA293AS	9 DIP	
KA293D KA293AD	8 SOP	
KA2903 KA2903D KA2903S	8 DIP 8 SOP 9 SIP	-40 ~ + 85°C

**SCHEMATIC DIAGRAM**

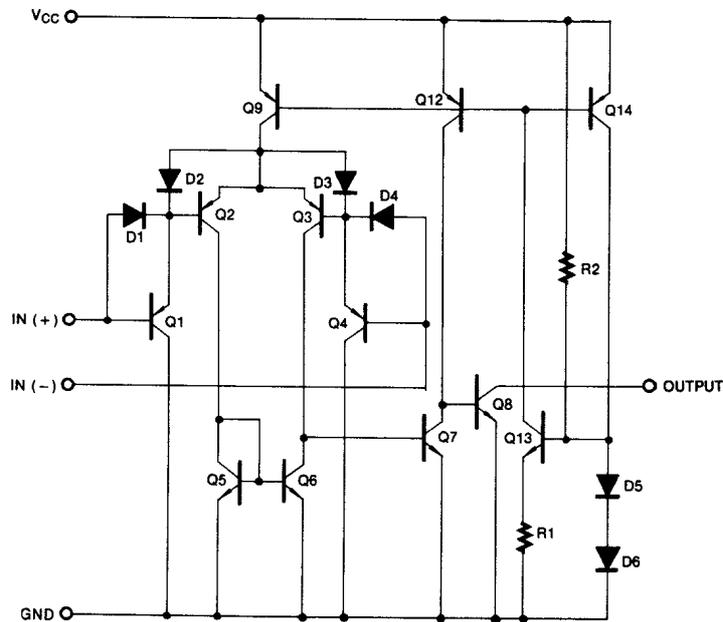

**ABSOLUTE MAXIMUM RATINGS**

Characteristic	Symbol	Value	Unit
Power Supply Voltage	$V_{CC}$	$\pm 18$ or 36	V
Differential Input Voltage	$V_{I(DIFF)}$	36	V
Input Voltage	$V_I$	- 0.3 to +36	V
Output Short Circuit to GND		Continuous	
Power Dissipation	$P_D$	570	mW
Operating Temperature	$T_{OPR}$	0 ~ + 70	°C
KA393/KA393A		- 25 ~ + 85	
KA293/KA293A KA2903		- 40 ~ + 85	
Storage Temperature	$T_{STG}$	- 65 ~ + 150	°C

**ELECTRICAL CHARACTERISTICS** ( $V_{CC}=5V$ ,  $T_A=25^\circ C$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA293A/KA393A			KA293/KA393			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$V_{IO}$	$V_{CM}=0V$ to $V_{CC}=1.5V$ $V_{O(P)}=1.4V$ , $R_S=0\Omega$		$\pm 1$	$\pm 2$		$\pm 1$	$\pm 5$	mV
			NOTE 1		$\pm 4.0$		$\pm 9.0$		
Input Offset Current	$I_{IO}$			$\pm 5$	$\pm 50$		$\pm 5$	$\pm 50$	nA
			NOTE 1		$\pm 150$		$\pm 150$		
Input Bias Current	$I_{BIAS}$			65	250		65	250	nA
			NOTE 1		400		400		
Input Common Mode Voltage Range	$V_{I(R)}$		0		$V_{CC}-1.5$	0		$V_{CC}-1.5$	V
			NOTE 1	0		$V_{CC}-2$	0		
Supply Current	$I_{CC}$	$R_L = \infty$		0.6	1		0.6	1	mA
		$R_L = \infty$ , $V_{CC} = 30V$		0.8	2.5		0.8	2.5	
Voltage Gain	$G_V$	$V_{CC}=15V$ , $R_L \geq 15K\Omega$ (for large $V_{O(P)swing}$ )	50	200		50	200	V/mV	
Large Signal Response Time	$t_{RES}$	$V_I = \text{TTL Logic Swing}$ $V_{REF}=1.4V$ , $V_{RL}=5V$ , $R_L=5.1K\Omega$		350		350		nS	
Response Time	$t_{RES}$	$V_{RL}=5V$ , $R_L=5.1K\Omega$		1.4		1.4		$\mu S$	
Output Sink Current	$I_{SINK}$	$V_{I(-)} \geq 1V$ , $V_{I(+)} = 0V$ , $V_{O(P)} \leq 1.5V$	6	18		6	18	mA	
Output Saturation Voltage	$V_{SAT}$	$V_{I(-)} \geq 1V$ , $V_{I(+)} = 0V$ $I_{SINK} = 4mA$		160	400		160	400	mV
		NOTE 1			700		700		
Output Leakage Current	$I_{O(LKG)}$	$V_{I(-)} = 0V$ ,		0.1		0.1		nA	
		$V_{I(+)} = 1V$	$V_{O(P)} = 5V$ $V_{O(P)} = 30V$		1.0		1.0	$\mu A$	

## NOTE 1

KA393/A:  $0 \leq T_A \leq +70^\circ C$ KA293/A:  $-25 \leq T_A \leq +85^\circ C$ KA2903:  $-40 \leq T_A \leq +85^\circ C$

**ELECTRICAL CHARACTERISTICS** ( $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA2903			Unit
			Min	Typ	Max	
Input Offset Voltage	$V_{IO}$	$V_{CM} = 0V$ to $V_{CC} = 1.5V$		$\pm 1$	$\pm 7$	mV
		$V_{O(P)} = 1.4V$ , $R_S = 0\Omega$	NOTE 1	$\pm 9$	$\pm 15$	
Input Offset Current	$I_{IO}$			$\pm 5$	$\pm 50$	nA
			NOTE 1	$\pm 50$	$\pm 200$	
Input Bias Current	$I_{BIAS}$			65	250	nA
Input Common Mode Voltage Range	$V_{I(R)}$		0		$V_{CC} - 1.5$	V
			0		$V_{CC} - 2$	
Supply Current	$I_{CC}$	$R_L = \infty$		0.6	1	mA
		$R_L = \infty$ , $V_{CC} = 30V$		1	2.5	
Voltage Gain	$G_V$	$V_{CC} = 15V$ , $R_L \geq 15K\Omega$ (for large $V_{O(P,P)swing}$ )	25	100		V/mV
Large Signal Response Time	$t_{RES}$	$V_I = TTL$ Logic Swing $V_{REF} = 1.4V$ , $V_{RL} = 5V$ , $R_L = 5.1K\Omega$		350		nS
Response Time	$t_{RES}$	$V_{RL} = 5V$ , $R_L = 5.1K\Omega$		1.5		$\mu S$
Output Sink Current	$I_{SINK}$	$V_{I(-)} \geq 1V$ , $V_{I(+)} = 0V$ , $V_{O(P)} \leq 1.5V$	6	16		mA
Output Saturation Voltage	$V_{SAT}$	$V_{I(-)} \geq 1V$ , $V_{I(+)} = 0V$		160	400	mV
		$I_{SINK} = 4mA$	NOTE 1		700	
Output Leakage Current	$I_{O(LKG)}$	$V_{I(-)} = 0V$ ,	$V_{O(P)} = 5V$	0.1		nA
		$V_{I(+)} = 1V$	$V_{O(P)} = 30V$		1.0	$\mu A$

## NOTE 1

KA393/A:  $0 \leq T_A \leq +70^\circ C$ KA293/A:  $-25 \leq T_A \leq +85^\circ C$ KA2903:  $-40 \leq T_A \leq +85^\circ C$

TYPICAL PERFORMANCE CHARACTERISTICS

Fig. 1 SUPPLY CURRENT

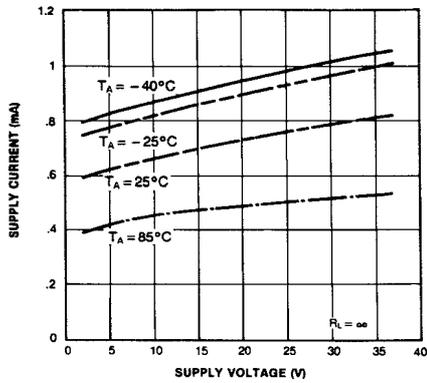


Fig. 2 INPUT CURRENT

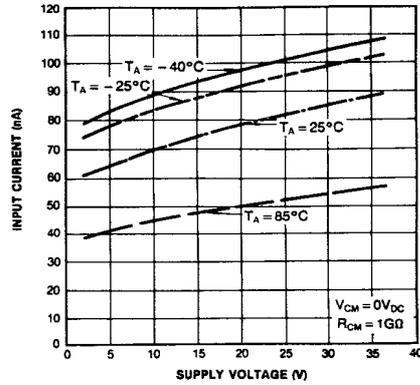


Fig. 3 OUTPUT SATURATION VOLTAGE

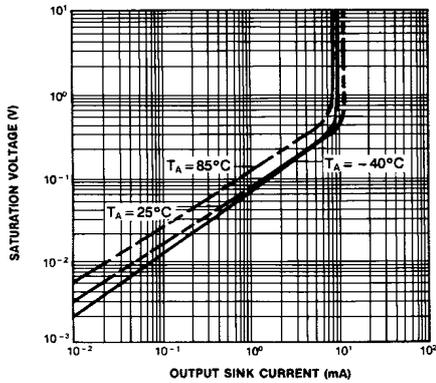


Fig. 4 RESPONSE TIME FOR VARIOUS INPUT OVERDRIVE-NEGATIVE TRANSITION


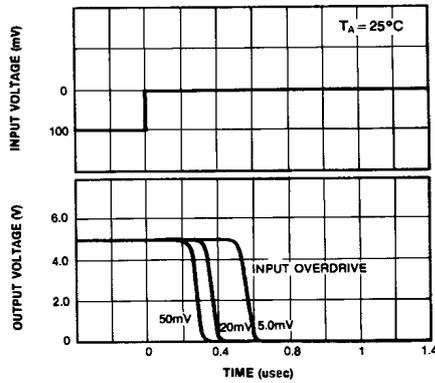



Fig. 5 RESPONSE TIME FOR VARIOUS INPUT OVERDRIVE-POSITIVE TRANSITION



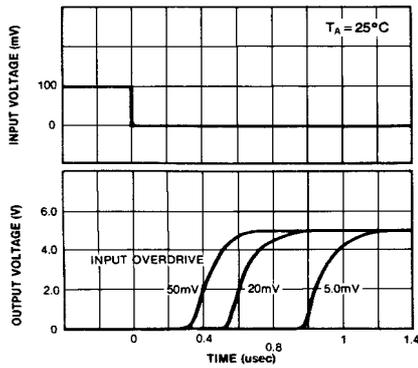

# 8-SOP-225


Dimensions in Millimeters/inches

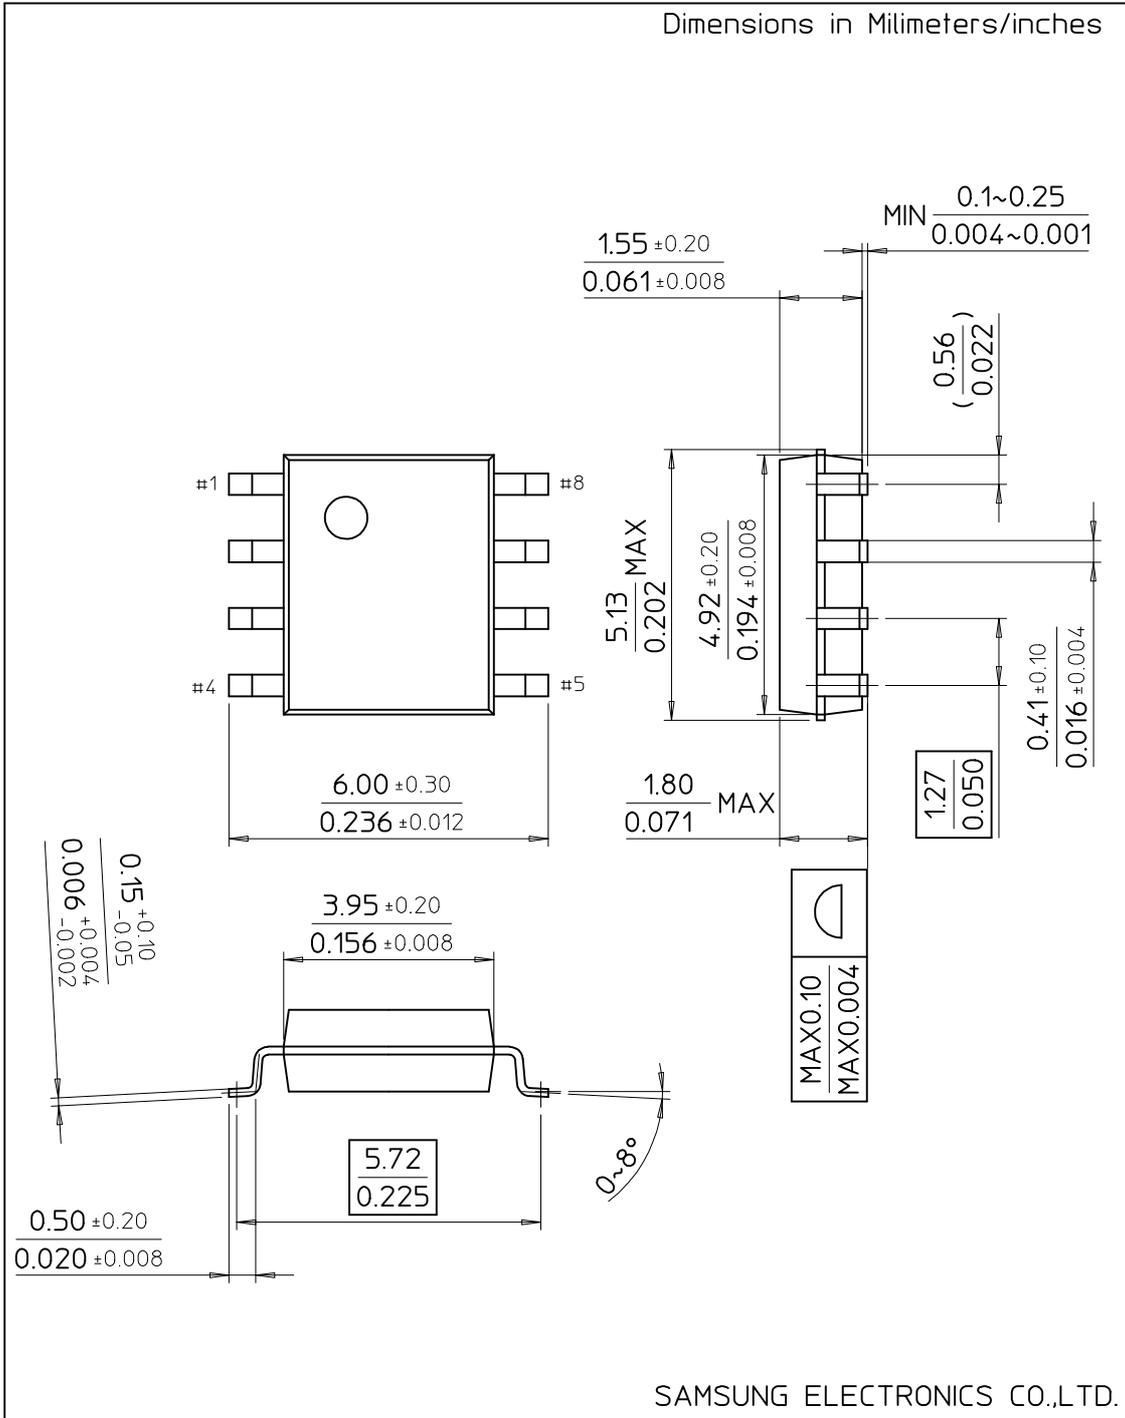

SAMSUNG ELECTRONICS CO.,LTD.

# 9-SIP

Dimensions in Milimeters/Inches

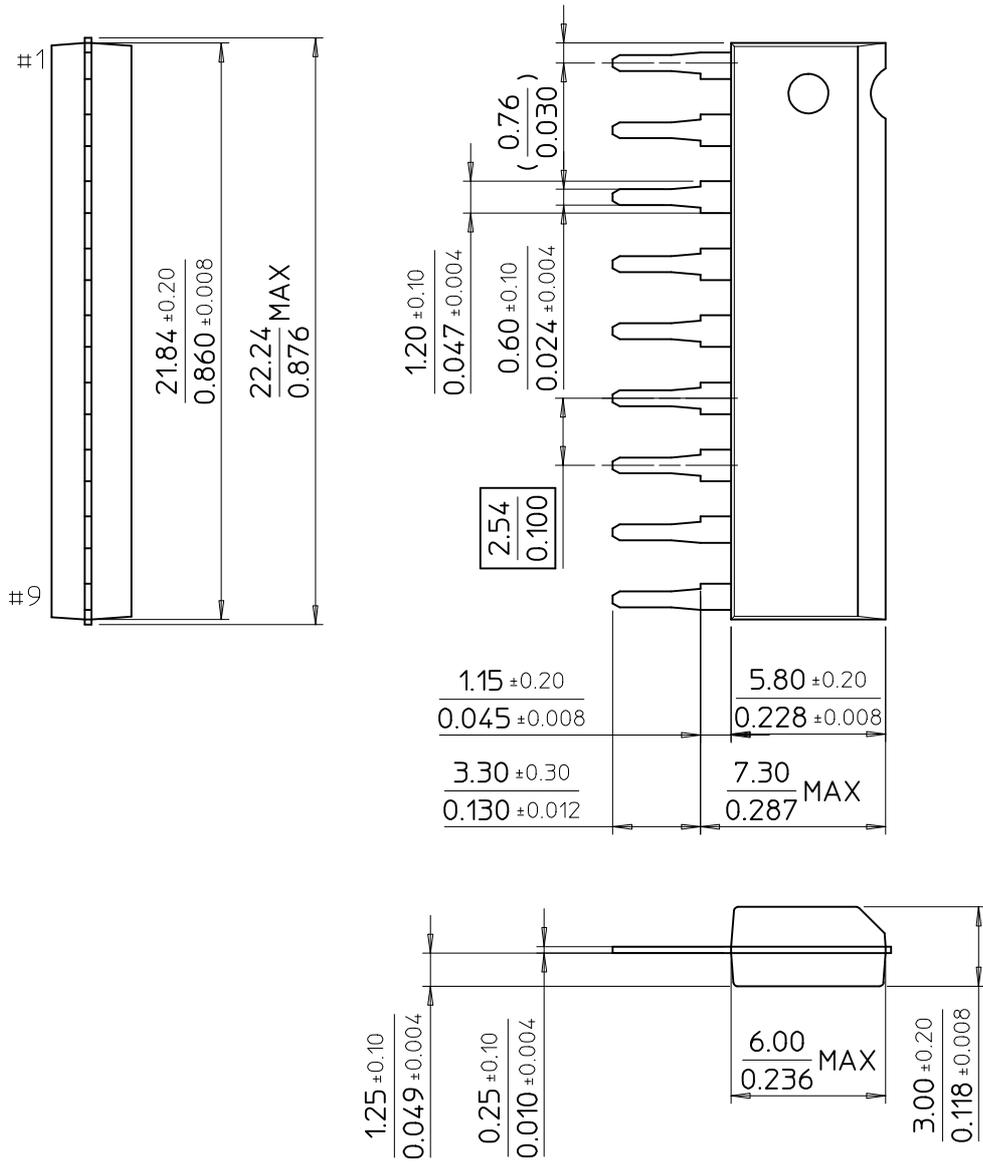

SAMSUNG ELECTRONICS CO.,LTD.