

## LH0094 Multifunction Converter

### General Description

The LH0094 multifunction converter generates an output voltage per the transfer function:

$$E_O = V_y \left( \frac{V_z}{V_x} \right)^m, 0.1 \leq m \leq 10, m \text{ continuously adjustable}$$

m is set by 2 resistors.

### Features


- Low cost
- Versatile
- High accuracy—0.05%
- Wide supply range—±5V to ±22V

- Minimum component count
- Internal matched resistor pair for setting  $m=2$  and  $m=0.5$


### Applications

- Precision divider, multiplier
- Square root
- Square
- Trigonometric function generator
- Companding
- Linearization
- Control systems
- Log amp


### Block and Connection Diagrams

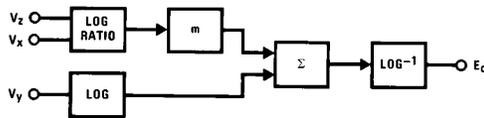

Order Number LH0094CD  
See NS Package Number D16D

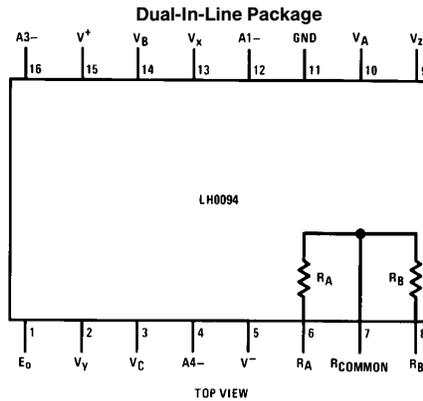

### Simplified Schematic

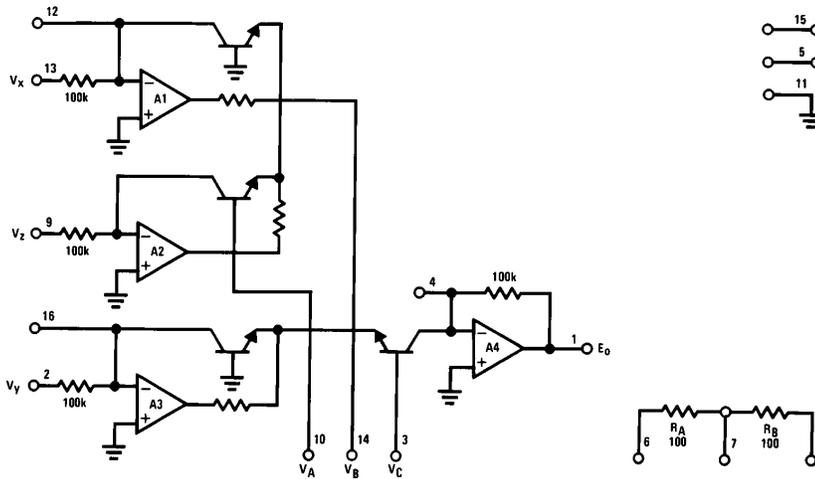

TL/H/5695-1

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                               |            |
|-------------------------------|------------|
| Supply Voltage                | ±22V       |
| Input Voltage                 | ±22V       |
| Output Short-Circuit Duration | Continuous |

|   |                 |
|---|-----------------|
| Operating Temperature Range<br>LH0094CD     | -25°C to +85°C  |
| Storage Temperature Range<br>LH0094CD       | -55°C to +125°C |
| Lead Temperature<br>(Soldering, 10 seconds) | 260°C           |

## Electrical Characteristics

$V_S = \pm 15V$ ,  $T_A = 25^\circ C$  unless otherwise specified. Transfer function:  $E_O = V_Y \frac{V_Z^m}{V_X}$ ;  $0.1 \leq m \leq 10$ ;  $OV \leq V_X, V_Y, V_Z \leq 10V$

| Parameter                     | Conditions   | LH0094C       |              |     | Units                      |
|-------------------------------|--|---------------|--------------|-----|----------------------------|
|                               |  | Min           | Typ          | Max |                            |
| <b>ACCURACY</b>               |  |               |              |     |                            |
| Multiply<br>Untrimmed         | $E_O = V_Z V_Y$ ( $0.03 \leq V_Y \leq 10V$ ; $0.01 \leq V_Z \leq 10V$ )<br>(Figure 2)  |               | 0.45         | 0.9 | % F.S.<br>(10V)            |
| External Trim                 | (Figure 3)<br>vs. Temperature  |               | 0.1<br>0.2   |     | % F.S.<br>mV/°C            |
| Divide<br>Untrimmed           | $E_O = 10V_Z/V_X$<br>(Figure 4), ( $0.5 \leq V_X \leq 10$ ; $0.01 \leq V_Z \leq 10$ )  |               | 0.45         | 0.9 | % F.S.                     |
| External Trim                 | (Figure 5), ( $0.1 \leq V_X \leq 10$ ; $0.01 \leq V_Z \leq 10$ )<br>vs. Temperature  |               | 0.1<br>0.2   |     | % F.S.<br>mV/°C            |
| Square Root<br>Untrimmed      | $E_O = 10\sqrt{V_Z/10}$<br>(Figure 8), ( $0.03 \leq V_Z \leq 10$ )   |               | 0.45         | 0.9 | % F.S.                     |
| External Trim                 | (Figure 9), ( $0.01 \leq V_Z \leq 10$ )  |               | 0.15         |     | % F.S.                     |
| Square<br>Untrimmed           | $E_O = 10(V_Z/10)^2$ ( $0.1 \leq V_Z \leq 10$ )<br>(Figure 6)  | 1.0           | 2.0          |     | % F.S.                     |
| External Trim                 | (Figure 7)   | 0.15          |              |     | % F.S.                     |
| Low Level<br>Square Root      | $E_O = \sqrt{10V_Z}$ ; $5.0mV \leq V_Z \leq 10V$ , (Figure 10)   |               | 0.05         |     | % F.S.                     |
| Exponential<br>Circuits       | $m = 0.2$ , $E_O = 10(V_Z/10)^2$ (Figure 11), ( $0.1 \leq V_Z \leq 10$ )<br>$m = 5.0$ , $E_O = 10(V_Z/10)^5$ (Figure 11), ( $1.0 \leq V_Z \leq 10$ ) |               | 0.08<br>0.08 |     | % F.S.<br>% F.S.           |
| <b>OUTPUT OFFSET</b>          |  |               |              |     |                            |
|                               | $V_X = 10V$ , $V_Y = V_Z = 0$  |               | 5.0          | 10  | mV                         |
| <b>AC CHARACTERISTICS</b>     |  |               |              |     |                            |
| 3 dB Bandwidth                | $m = 1.0$ , $V_X = 10V$ , $V_Y = 0.1 V_{rms}$<br>10 Hz to 1.0 kHz, $m = 1.0$ , $V_Y = V_Z = OV$  |               | 10           |     | kHz                        |
| Noise                         | $V_X = 10V$<br>$V_X = 0.1V$  |               | 100<br>300   |     | $\mu V/rms$<br>$\mu V/rms$ |
| <b>EXPONENT</b>               |  |               |              |     |                            |
| m                             |  | 0.2 to<br>5.0 | 0.1 to<br>10 |     |                            |
| <b>INPUT CHARACTERISTICS</b>  |  |               |              |     |                            |
| Input Voltage                 | (For Rated Performance)  | 0             |              | 10  | V                          |
| Input Impedance               | (All Inputs)   | 98            | 100          |     | k $\Omega$                 |
| <b>OUTPUT CHARACTERISTICS</b> |  |               |              |     |                            |
| Output Swing                  | ( $R_L \leq 10k$ )   | 10            | 12           |     | V                          |
| Output Impedance              |  |               | 1.0          |     | $\Omega$                   |
| Supply Current                | ( $V_S = \pm 15V$ ) (Note 1)   |               | 3.0          | 5.0 | mA                         |

**Note 1:** Refer to RETS0094D drawing for specifications of the military LH00940 version.

## Applications Information

### GENERAL INFORMATION

Power supply bypass capacitors (0.1  $\mu\text{F}$ ) are recommended for all applications.

The LH0094 series is designed for positive input signals only. However, negative input up to the supply voltage will not damage the device.

A clamp diode (*Figure 1*) is recommended for those applications in which the inputs may be subjected to open circuit or negative input signals.

For basic applications (multiply, divide, square, square root) it is possible to use the device without any external adjustments or components. Two matched resistors are provided internally to set  $m$  for square or square root.


When using external resistors to set  $m$ , such resistors should be as close to the device as possible.

### SELECTION OF RESISTORS TO SET $m$


#### Internal Matched Resistors

$R_A$  and  $R_B$  are matched internal resistors. They are  $100\Omega \pm 10\%$ , but matched to 0.1%.

(a)  $m = 2^*$

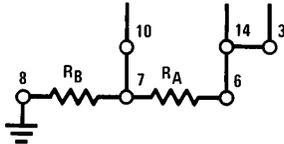

(b)  $m = 0.5^*$

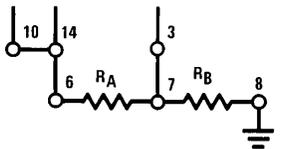


TL/H/5695-2

\*No external resistors required, strap as indicated

#### External Resistors


The exponent is set by 2 external resistors or it may be continuously varied by a single trim pot. ( $R_1 + R_2 \leq 500\Omega$ ).

(a)  $m = 1$




TL/H/5695-3

(b)  $m < 1$



$$m = \frac{R_2}{R_1 + R_2} \quad R_1 + R_2 \approx 200\Omega$$

(c)  $m > 1$



$$m = \frac{R_1 + R_2}{R_2}$$

TL/H/5695-4

### ACCURACY (ERROR)

The accuracy of the LH0094 is specified for both externally adjusted and unadjusted cases.

Although it is customary to specify the errors in percent of full-scale (10V), it is seen from the typical performance curves that the actual errors are in percent of reading. Thus, the specified errors are overly conservative for small input voltages. An example of this is the LH0094 used in the multiplication mode. The specified typical error is 0.25% of full-scale (25 mV). As seen from the curve, the unadjusted error is  $\approx 25$  mV at 10V input, but the error is less than 10 mV for inputs up to 1V. Note also that if either the multiplicand or the multiplier is at less than 10V, (5V for example) the unadjusted error is less. Thus, the errors specified are at full-scale—the worst case.


The LH0094 is designed such that the user is able to externally adjust the gain and offset of the device—thus trim out all of the errors of conversion. In most applications, the gain adjustment is the only external trim needed for super accuracy—except in division mode, where a denominator offset adjust is needed for small denominator voltages.

### EXPONENTS

The LH0094 is capable of performing roots to 0.1 and powers up to 10. However, care should be taken when applying these exponent—otherwise, results may be misinterpreted. For example, consider the  $\frac{1}{10}$ th power of a number: i.e., 0.001 raised to 0.1 power is 0.5011; 0.1 raised to the 0.1 power is 0.7943; and 10 raised to the 0.1 power is 1.2589. Thus, it is seen that while the input has changed 4 decades, the output has only changed a little more than a factor of 2. It is also seen that with as little as 1 mV of offset, the output will also be greater than zero with zero input.

# Applications Information (Continued)

## 1. CLAMP DIODE CONNECTION

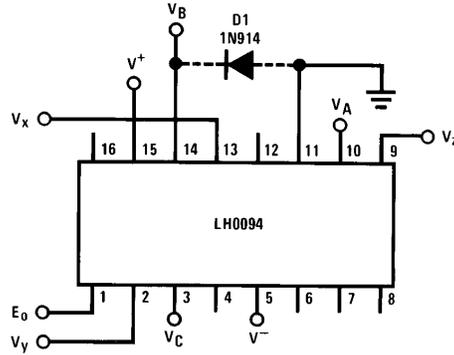

$$E_0 = V_y \left( \frac{V_z}{V_x} \right)^m$$

$$0.1 \leq m \leq 10$$

Note. This clamp diode connection is recommended for those applications in which the inputs may be subject to open circuit or negative signals.

FIGURE 1. Clamp Diode Connection

## 2. MULTIPLY

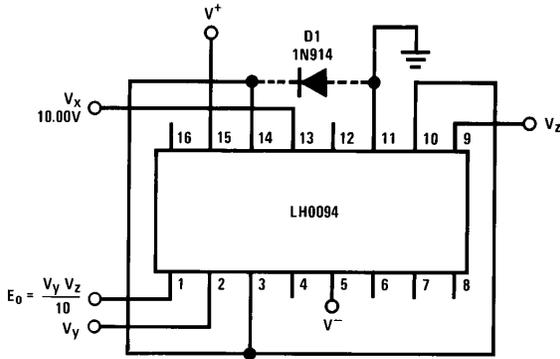


FIGURE 2a. LH0094 Used to Multiply (No External Adjustment)


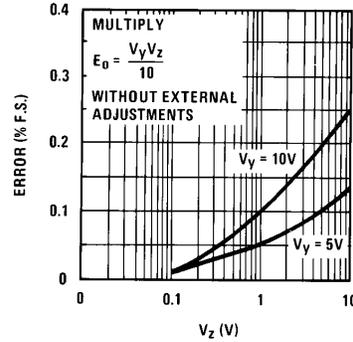


FIGURE 2b. Typical Performance of LH0094 in Multiply Mode Without External Adjustment

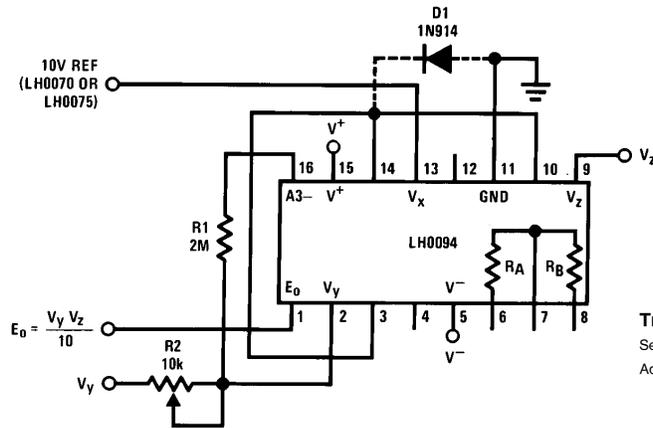

$$E_0 = \frac{V_y V_z}{10} \quad m = 1$$

### Trim Procedure

Set  $V_z = V_y = 10V$   
Adjust R2 until output = 10.000V

TL/H/5695-5

FIGURE 3. Precision Multiplier (0.02% Typ) with 1 External Adjustment

## Applications Information (Continued)

### 3. DIVIDE

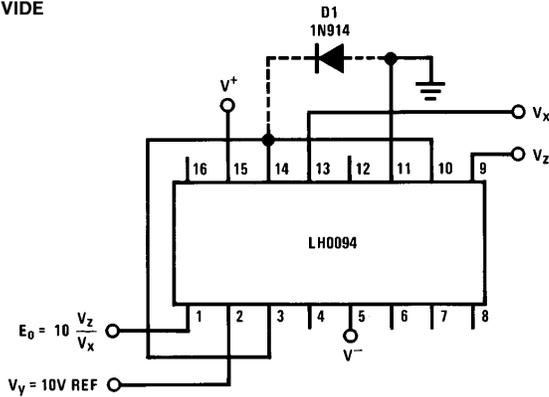


FIGURE 4a. LH0094 Used to Divide (No External Adjustment)

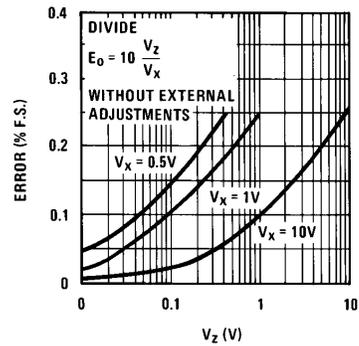


FIGURE 4b. Typical Performance, Divide Mode, Without External Adjustments

#### Trim Procedures

- Apply 10V to  $V_y$ , 0.1V to  $V_x$  and  $V_z$ . Adjust R3 until  $E_o = 10.000V$ .
- Apply 10.000V to all inputs. Adjust R2 until  $E_o = 10.000V$ .
- Repeat procedure.

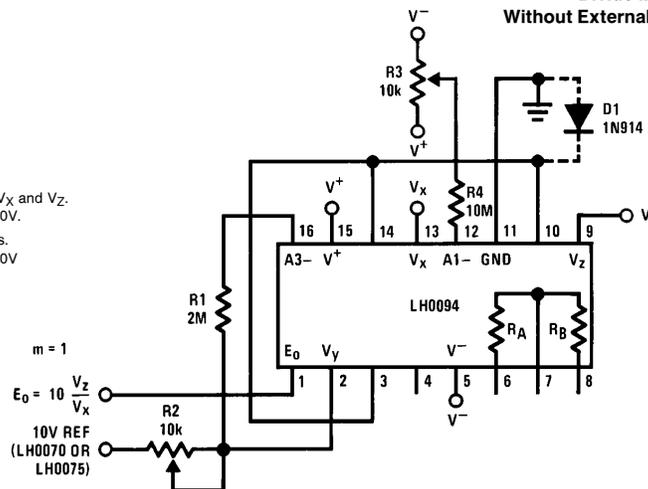


FIGURE 5. Precision Divider (0.05% Typ)

### 4. SQUARE

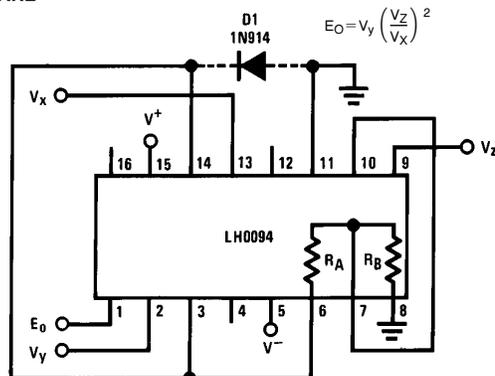


FIGURE 6a. Basic Connection of LH0094 ( $m=2$ ) without External Adjustment Using Internal Resistors to Set  $m$

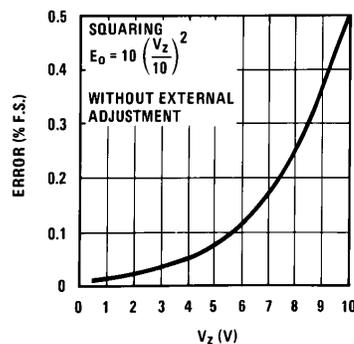


FIGURE 6b. Squaring Mode without External Adjustment

TL/H/5695-6

# Applications Information (Continued)

## 4. SQUARE (Continued)

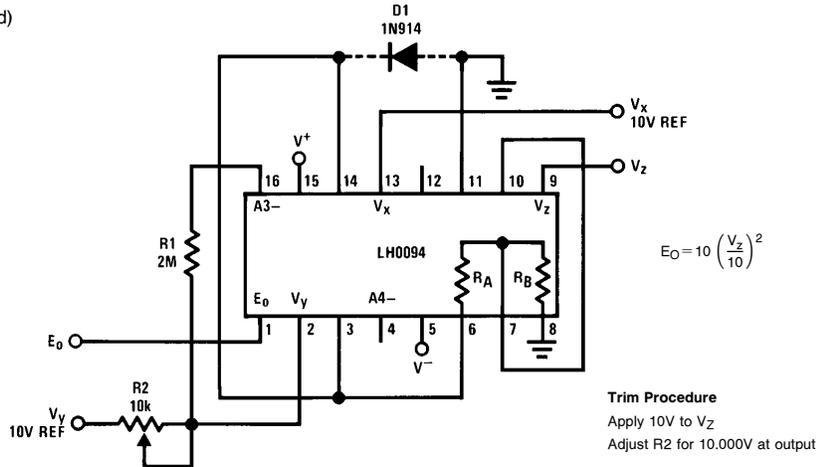


FIGURE 7. Precision Squaring Circuit (0.15% Typ)

## 5. SQUARE ROOT

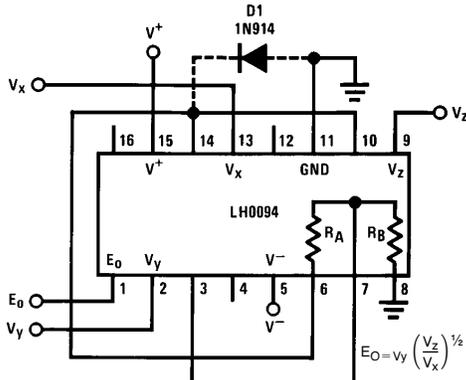


FIGURE 8a. Basic Connection of LH0094 ( $m = 0.5$ ) without External Adjustment Using Internal Resistors to Set  $m$

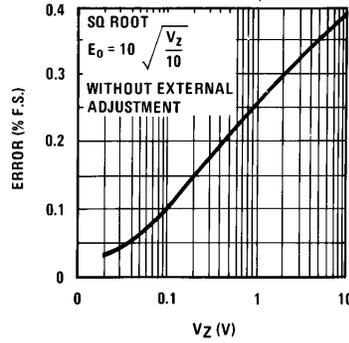


FIGURE 8b. Typical Performance Curve Square Root, No External Adjustment

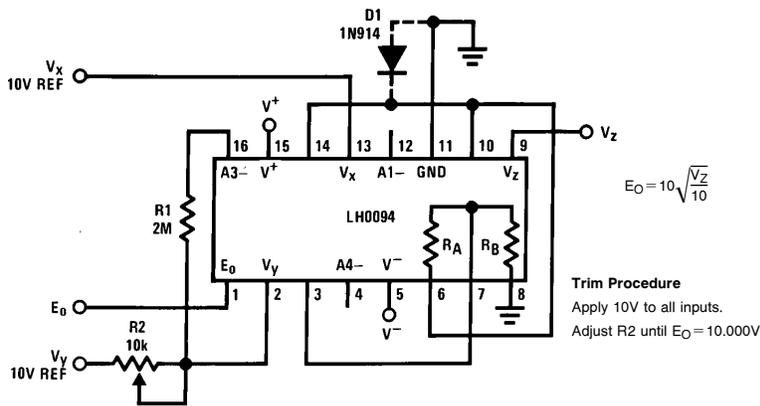


FIGURE 9. Precision Square Rooter (0.15% Typ)

TL/H/5695-7

## Applications Information (Continued)

### 6. LOW LEVEL SQUARE ROOT

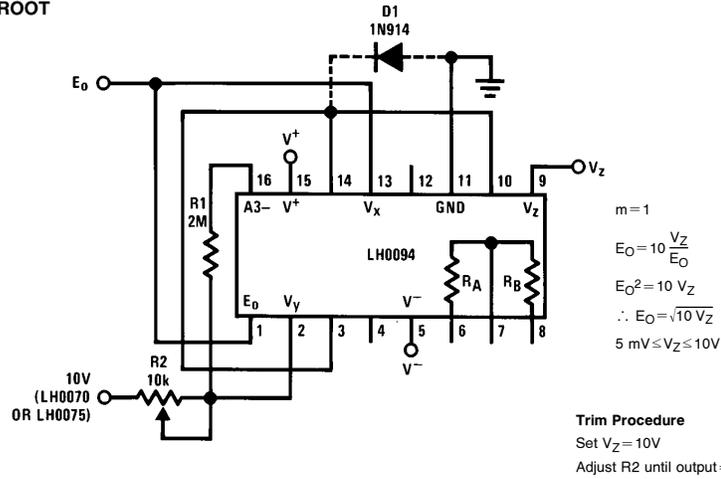


FIGURE 10. 3-Decade Precision Square Root Circuit Using the LH0094 with  $m = 1$

## Typical Applications


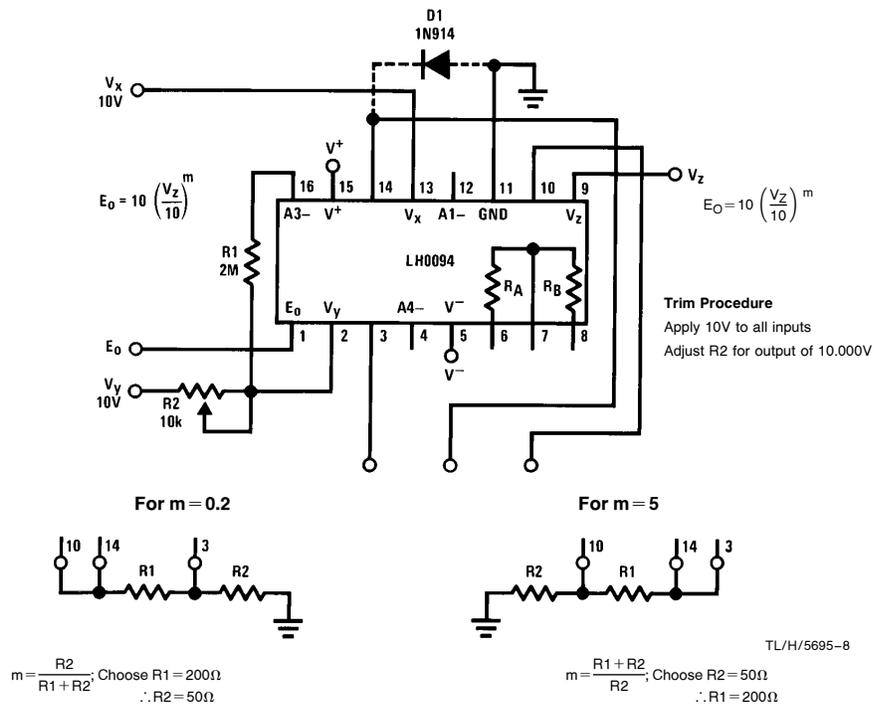


FIGURE 11. Precision Exponentiator ( $m = 0.2$  to 5)

## Typical Applications (Continued)

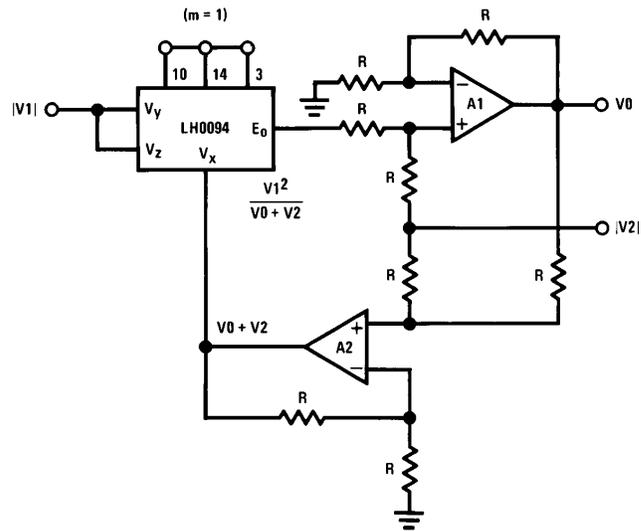

Note. The LH0094 may be used to generate a voltage equivalent to:

$$V_0 = \sqrt{V_1^2 + V_2^2}$$

$$V_0 = V_2 + \frac{V_1^2}{V_0 + V_2}$$

$$V_0^2 + V_0 V_2 = V_2 V_0 + V_2^2 + V_1^2$$


$$V_0^2 = V_1^2 + V_2^2$$

$$\therefore V_0 = \sqrt{V_1^2 + V_2^2} \quad V_1, V_2 \geq 0 \rightarrow 10V$$

$R \approx 10k$

National Semiconductor resistor array RA08—10k is recommended

**FIGURE 12. Vector Magnitude Function**

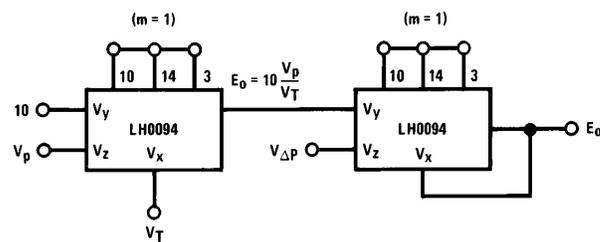

Note. The LH0094 may be used in direct measurement of gas flow.

$$\text{Flow} = k \sqrt{\frac{P \Delta P}{T}}$$

$$E_0 = 10 \frac{V_p}{V_T} \times \frac{V_{\Delta P}}{E_0}$$

$$E_0^2 = 10 \frac{V_p V_{\Delta P}}{V_T}$$


$$E_0 = \sqrt{10 \frac{V_p V_{\Delta P}}{V_T}}$$

P = Absolute pressure  
T = Absolute temperature  
 $\Delta P$  = Pressure drop

**FIGURE 13. Mass Gas Flow Circuit**

TL/H/5695-9

## Typical Applications (Continued)

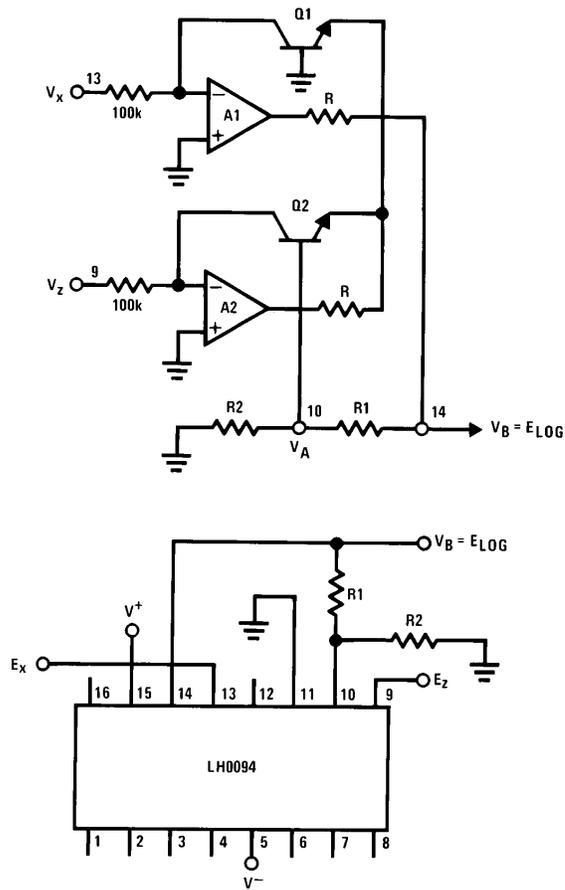

TL/H/5695-10

Note. The LH0094 may also be used to generate the Log of a ratio of 2 voltages. The output is taken from pin 14 of the LH0094 for the Log application.

$$E_{\text{LOG}} = K1 \frac{KT}{q} \ln \frac{V_Z}{V_X}$$

$$\text{where } K1 = \frac{R1 + R2}{R2}$$

$$\text{If } K1 = \frac{1}{KT/q \ln 10}$$

$$\text{then } E_{\text{LOG}} = \text{Log}_{10} \frac{V_Z}{V_X}$$

$$R1 = 15.9 R2$$


$$R2 \approx 400 \Omega$$

R2 must be a thermistor with a tempco of  $\approx 0.33\%/^{\circ}\text{C}$  to be compensated over temperature.

**FIGURE 14. Log Amp Application**

# LH0094 Multifunction Converter

## Physical Dimensions inches (millimeters)

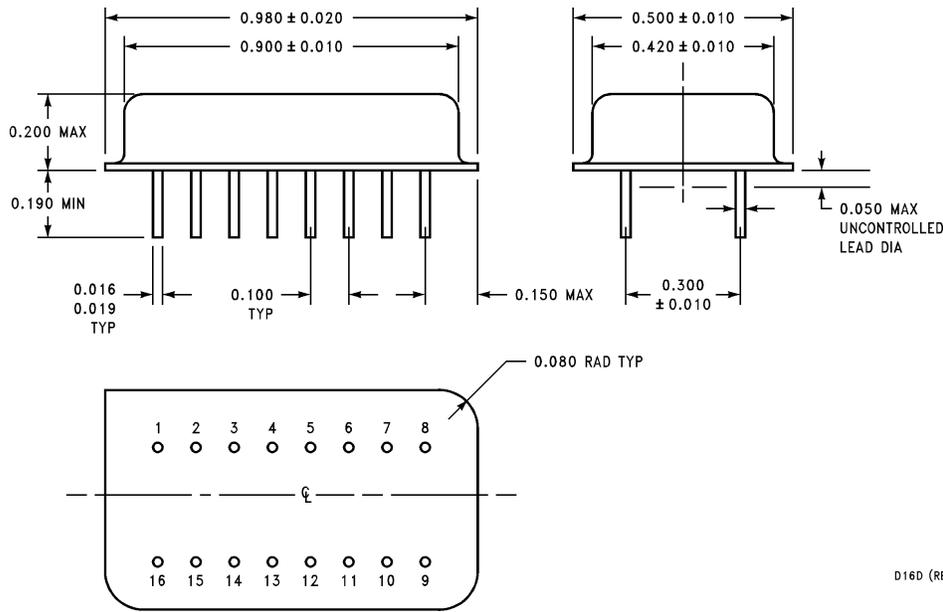

Order Number LH0094CD  
NS Package Number D16D

D16D (REV C)

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

**National Semiconductor Europe**  
Fax: (+49) 0-180-530 85 86  
Email: cnjwge@tevm2.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Français Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
19th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
Tel: 81-043-299-2309  
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.