

LM384 5 Watt Audio Power Amplifier

General Description

The LM384 is a power audio amplifier for consumer application. In order to hold system cost to a minimum, gain is internally fixed at 34 dB. A unique input stage allows inputs to be ground referenced. The output is automatically selfcentering to one half the supply voltage.


The output is short-circuit proof with internal thermal limiting. The package outline is standard dual-in-line. A copper lead frame is used with the center three pins on either side comprising a heat sink. This makes the device easy to use in standard p-c layout.

Uses include simple phonograph amplifiers, intercoms, line drivers, teaching machine outputs, alarms, ultrasonic drivers, TV sound systems, AM-FM radio, sound projector systems, etc. See AN-69 for circuit details.

Features

- Wide supply voltage range
- Low quiescent power drain
- Voltage gain fixed at 50
- High peak current capability
- Input referenced to GND
- High input impedance
- Low distortion
- Quiescent output voltage is at one half of the supply voltage
- Standard dual-in-line package

Schematic Diagram

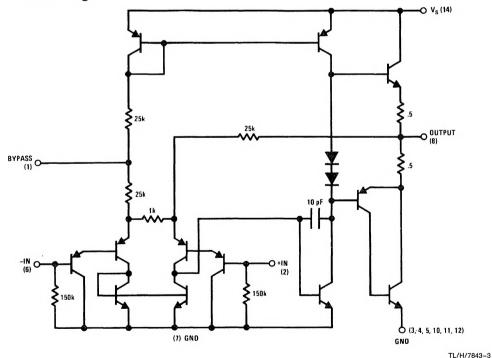

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Supply Voltage 28V Peak Current 1.3A Power Dissipation (See Notes 3 and 4) 1.67W Input Voltage ± 0.5 V Storage Temperature -65° C to $+150^{\circ}$ C Operating Temperature 0° C to $+70^{\circ}$ C

260°C

Lead Temperature (Soldering, 10 sec.)

Electrical Characteristics (Note 1)

Symbol	Parameter	Conditions	Min	Тур	Max	Units
Z _{IN}	Input Resistance			150		kΩ
I _{BIAS}	Bias Current	Inputs Floating		100		nA
A _V	Gain		40	50	60	V/V
Pout	Output Power	THD = 10%, $R_L = 8\Omega$	5	5.5		w
IQ	Quiescent Supply Current			8.5	25	mA
V _{OUT Q}	Quiescent Output Voltage			11		V
BW	Bandwidth	$P_{OUT} = 2W, R_L = 8\Omega$		450		kHz
۷+	Supply Voltage		12		26	V
Isc	Short Circuit Current (Note 5)			1.3		Α
PSRR _{RTO}	Power Supply Rejection Ratio (Note 2)			31		dB
THD	Total Harmonic Distortion	$P_{OUT} = 4W, R_L = 8\Omega$		0.25	1.0	%

Note 1: $V^+ = 22V$ and $T_A = 25^{\circ}C$ operating with a Staver V7 heat sink for 30 seconds.

Note 2: Rejection ratio referred to the output with $C_{BYPASS} = 5 \mu F$, freq = 120 Hz.

Note 3: The maximum junction temperature of the LM384 is 150°C.

Note 4: The package is to be derated at 15°C/W junction to heat sink pins.

Note 5: Output is fully protected against a shorted speaker condition at all voltages up to 22V.

Heat Sink Dimensions


Staver Company 41 Saxon Ave. P.O. Drawer H Bay Shore, N.Y.


Tel: (516) 666-8000


Staver "V7" Heat Sink


TL/H/7843-4


Typical Performance Characteristics




























TL/H/7843-5


Block and Connection Diagrams






Order Number LM384N See NS Package Number N14A

Typical Applications



Bridge Amplifier

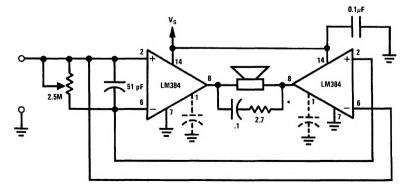


TL/H/7843-7

TL/H/7843-6

Typical Applications (Continued)

Intercom

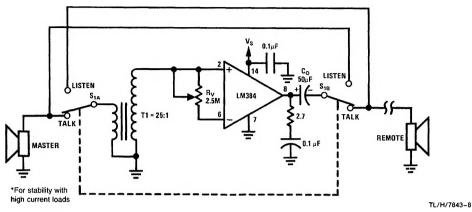

Phase Shift Oscillator

