

**LB1274**

6-Unit, Darlington Transistor Array

Overview

Circuit structure of this IC is a 6-unit Darlington transistor array with NPN transistors. The IC is ideal for driving printers, relays, and lamps. Protective diodes guard against negative inputs. Thus it has advantages when designing circuits to drive printer-calculators that use display tubes, cash registers, and the like.

Features

- Ideal for 18-digit printers (because it has 6 units).
- Protective diodes are incorporated against negative inputs ($V_{IN} = -40$ to $+20V$).
- Ideal for printers, with 85-mA load current ($I_{OUT\ max} = 100mA$ DC).
- Spark-killer diodes accommodate L-loads.

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Output supply voltage	V_{OUT}		-0.3 to $+22$	V
Input supply voltage	V_{IN}		-40 to $+20$	V
Pin-8 supply voltage	V_8		-0.3 to $+20$	V
Output inflow current	I_{OUT}	Per unit	0 to 100	mA
Instantaneous output inflow current	I_{OP}	Per unit : duty $\leq$ 10%, pulse width $<$ 20ms	0 to 150	mA
Spark killer diode forward current	$I_{F(s)}$	Per diode : duty $\leq$ 10%, pulse width $<$ 20ms	0 to 150	mA
GND-pin outflow current	I_7		-700 to 0	mA
Pin-8 instantaneous outflow current	I_{8p}	duty $\leq$ 10%, pulse width $<$ 20ms	-500 to 0	mA
Allowable power dissipation	$P_{d\ max}$		1.15	W
Junction temperature	T_j		125	$^\circ C$
Operating temperature	T_{opr}		-20 to $+80$	$^\circ C$
Storage temperature	T_{stg}		-40 to $+125$	$^\circ C$

Allowable Operating Ranges at $T_a = 25^\circ C$, pin7=0V

Parameter	Symbol	Conditions	Ratings	Unit
Output supply voltage	V_{OUT}		22	V or less
Input high-level voltage	V_{IH}	output terminal current=100mA	9 to 20	V
Input low-level voltage	V_{IL}	output terminal current=100 μA	-35 to $+1$	V
Load inductance	L_L	Protective diodes employed	100	mH or less


■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

Package Dimensions

unit:mm

3004A-DIP14TD

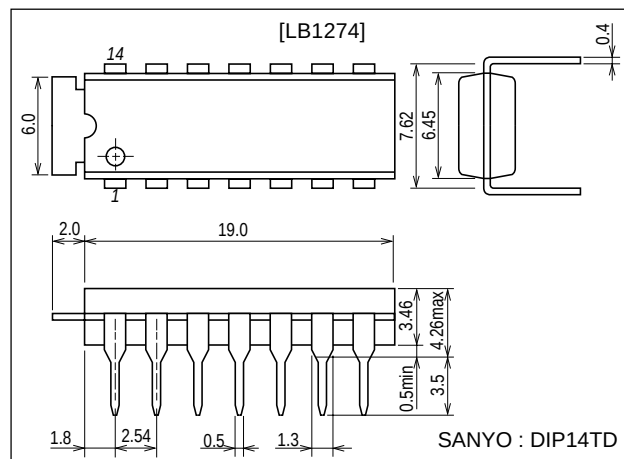

SANYO Electric Co.,Ltd. Semiconductor Company




TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

22801TN (KT)/O3195YK/7097KI/8055KI/7213KI, TS No.535-1/3

Electrical Characteristics at $T_a = 25^\circ\text{C}$, pin7=0V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage	V_{OUT1}	$V_{IN}=9.0\text{V}$, $I_{OUT}=150\text{mA}$			1.7	V
	V_{OUT2}	$V_{IN}=9.0\text{V}$, $I_{OUT}=100\text{mA}$			1.4	V
Output sustaining voltage	$V_{OUT(s)}$	$V_{IN}=\text{open}$, $I_{OUT}=150\text{mA}$, applied time<10 μs	22			V
Output leakage current	I_{off}	$V_{IN}=1.0\text{V}$, $V_{OUT}=22\text{V}$			100	μA
Input current	I_{IN1}	$V_{IN}=18\text{V}$			1.8	mA
	I_{IN2}	$V_{IN}=9.0\text{V}$			0.8	mA
Output current	I_{OUT}	$I_{IN}=0.3\text{mA}$, $V_{OUT}=1.4\text{V}$	100			mA
Input leakage current	I_{leak}	$V_{IN}=-35\text{V}$	-10			μA
Spark killer diode leakage current	$I_{leak(s)}$	$V_{OUT}=0\text{V}$, pin8=20V			30	μA
Spark killer diode forward current	$V_{F(s)}$	$I_{F(s)}=150\text{mA}$			1.7	V

Equivalent Circuit

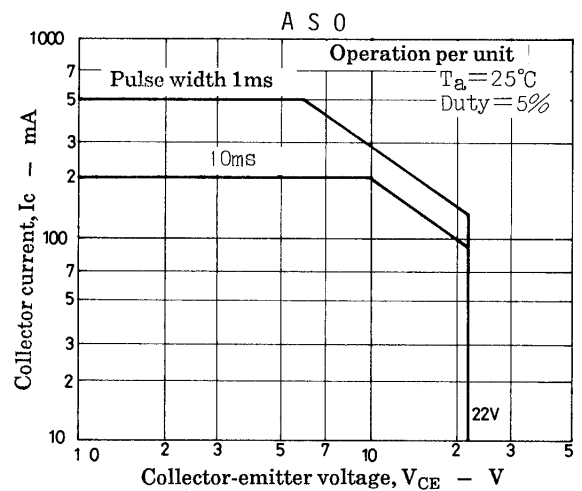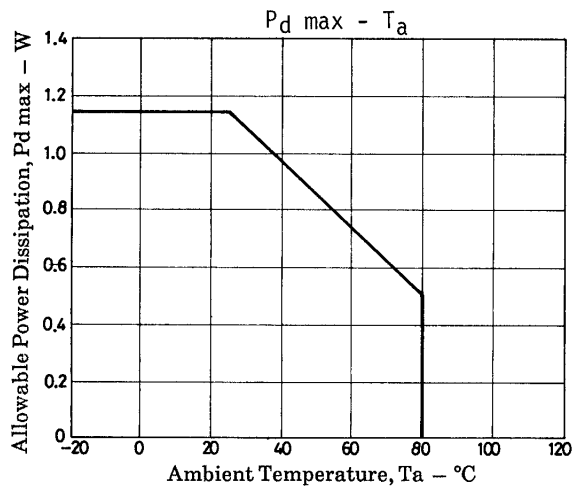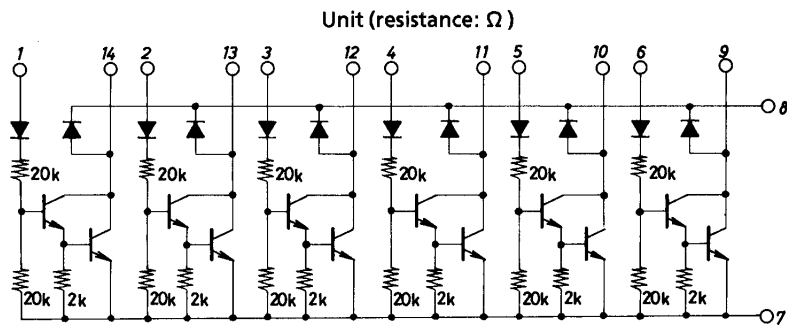

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 2001. Specifications and information herein are subject to change without notice.