

Ordering number: EN ※ 5076A

CMOS LSI

SANYO	No. ※ 5076A	LC11012-141
	Computer Image Signal Processing Full-Color Gray-Scale Processor	

Preliminary

Overview

The LC11012-141 is a pseudo gray-scale processor for TFT-LCD panel displays. It allows TFT-LCD panels with 3- or 4-bit input digital drivers to display the equivalent of 16.7 million colors.


Features

- Handles 8 bits of input data (256-level gray scale data) for each of the RGB colors
- Realizes reduced resolution loss (as compared to dithering techniques) by using intra-frame and inter-frame error diffusion processing
- Incorporates a new full-coloration algorithm, formerly best done using computers
- Operating mode selection of outputs for 3- or 4-bit drivers
- Supports both 5V and low-voltage 3.3V operation
- Operates with arbitrary clock frequencies up to 40MHz (5V supply) and 30MHz (3.3V supply)
- Can operate independently of the number of displayed pixels since internal operation is controlled by the horizontal and vertical synchronization signals.
- Power-save function to stop the internal operation processing circuits, and output the clock, sync signals and control signals

Package Dimensions

unit: mm

3159-QFP64E

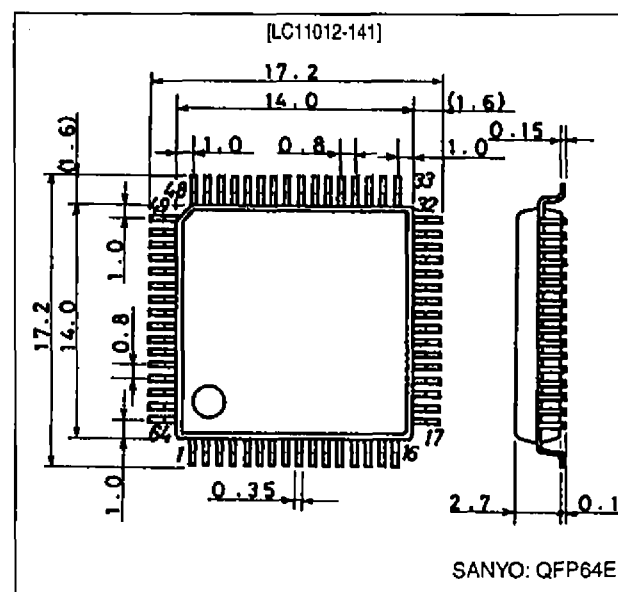


SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN


31796HA (ID) / 22795TH (ID) No. 5076—1/7

LC11012-141

Pin Assignment

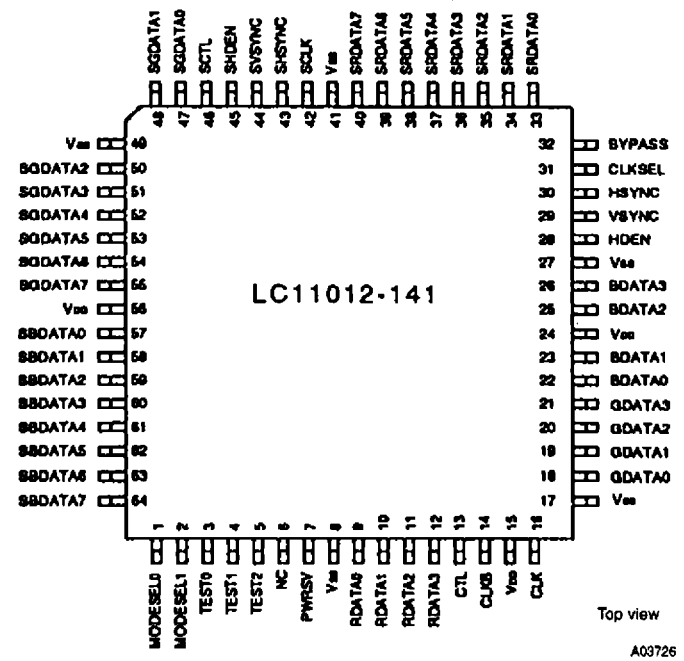

Block Diagram

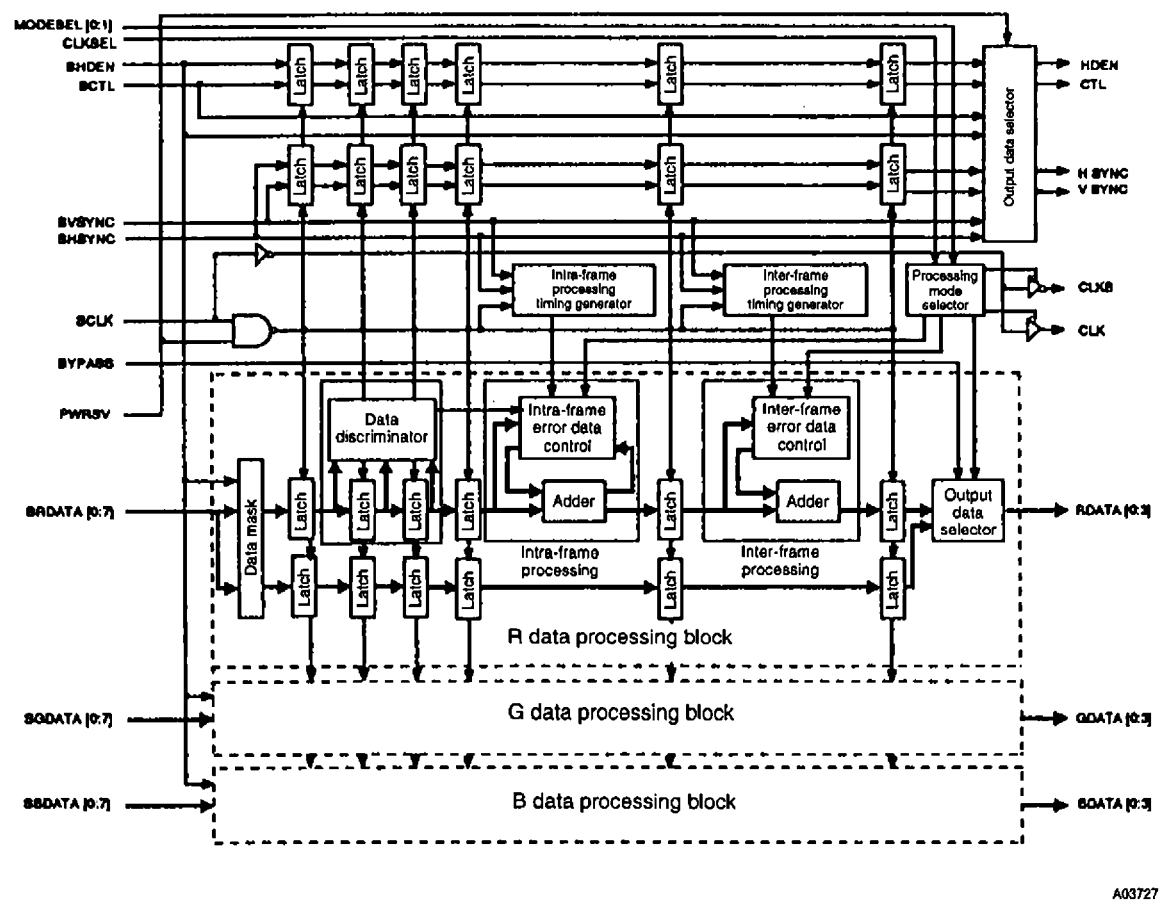

Pin Functions

Symbol	Pin No.	I/O ¹	Function																																																
V _{DD}	15, 24, 56		Power supply (+5V)																																																
V _{SS}	8, 17, 27, 41, 49		Ground (0V)																																																
NC	6		Must be left open.																																																
MODESEL [0:1]	1, 2	I	<p>Mode selection signals [0:1] for the gray-scale mode. The setting process for the mode selection lines is described below. MODESEL0 is the LSB and MODESEL1 is the MSB. Note that the mode number (0 to 3) and the gray-scale processing differ from existing devices.</p> <table><tr><th colspan="2">Gray-scale mode</th><th>0</th><th>1</th><th>2</th><th>3</th></tr><tr><td colspan="2">MODESEL0</td><td>L</td><td>H</td><td>L</td><td>H</td></tr><tr><td colspan="2">MODESEL1</td><td>L</td><td>L</td><td>H</td><td>H</td></tr><tr><td rowspan="2">Processing</td><td>Intra-frame processing</td><td>Yes</td><td>Yes</td><td>Yes</td><td rowspan="2">Reserved</td></tr><tr><td>Inter-frame processing</td><td>Yes</td><td>Yes</td><td>No</td></tr><tr><td colspan="2">Number of valid input bits</td><td>8</td><td>8</td><td>8</td><td></td></tr><tr><td colspan="2">Number of output bits</td><td>3</td><td>4</td><td>4</td><td></td></tr></table> <table><tr><th>Gray-scale mode¹</th><th>LCD module</th></tr><tr><td>0</td><td>Operating mode for TFT LCD modules with 3-bit source driver</td></tr><tr><td>1</td><td>Operating mode for TFT LCD modules with 4-bit source driver</td></tr><tr><td>2</td><td>Operating mode for TFT LCD modules with 3-bit source driver that perform FRC or other inter-frame processing</td></tr></table> <p>1. Do not use gray-scale modes 0 and 1 with TFT LCD modules that perform FRC or other inter-frame processing.</p>	Gray-scale mode		0	1	2	3	MODESEL0		L	H	L	H	MODESEL1		L	L	H	H	Processing	Intra-frame processing	Yes	Yes	Yes	Reserved	Inter-frame processing	Yes	Yes	No	Number of valid input bits		8	8	8		Number of output bits		3	4	4		Gray-scale mode ¹	LCD module	0	Operating mode for TFT LCD modules with 3-bit source driver	1	Operating mode for TFT LCD modules with 4-bit source driver	2	Operating mode for TFT LCD modules with 3-bit source driver that perform FRC or other inter-frame processing
Gray-scale mode		0	1	2	3																																														
MODESEL0		L	H	L	H																																														
MODESEL1		L	L	H	H																																														
Processing	Intra-frame processing	Yes	Yes	Yes	Reserved																																														
	Inter-frame processing	Yes	Yes	No																																															
Number of valid input bits		8	8	8																																															
Number of output bits		3	4	4																																															
Gray-scale mode ¹	LCD module																																																		
0	Operating mode for TFT LCD modules with 3-bit source driver																																																		
1	Operating mode for TFT LCD modules with 4-bit source driver																																																		
2	Operating mode for TFT LCD modules with 3-bit source driver that perform FRC or other inter-frame processing																																																		
BYPASS	32	I	Gray-scale processing bypass pin. When a low-level input on this pin is sampled on the falling edge of the clock, the IC will begin the output of unchanged data five clock cycles later. Data is output via the internal latch circuit. Data is not output, however, when the SCLK clock signal is not input.																																																
TEST [0:2]	3, 4, 5	I	Test pins [0:2]; left open for normal operation																																																
SCLK	42	I	Display dot clock signal input. Data is processed according to this clock signal.																																																
SRDATA [0:7]	33 to 40	I	Input pins for red, green and blue gray-scale data. SRDATA7, SGDATA7 and SBDATA7 are the MSBs. SRDATA0, SGDATA0 and SBDATA0 are the LSBs.																																																
SGDATA [0:7]	47, 48, 50 to 55	I																																																	
SBDATA [0:7]	57 to 64	I																																																	
SHSYNC	43	I	Horizontal and vertical synchronization signal inputs. These are the sources for the HSYNC and VSYNC signals. They are also used to control data processing. Active-low signals.																																																
SVSYNC	44	I																																																	
SHDEN	45	I	Horizontal data valid-period signal input. Set this pin high during periods when the horizontal data is valid. If this signal is not used, tie it high and set the input data to 0 during the horizontal blanking period.																																																
SCTL	46	I	LCD control signal input. Input control signal that must be matched to the data signal timing. This is the source for the CTL signal. If the CTL signal is not used, there is no need to input the SCTL signal.																																																
CLKSEL	31	I	CLKSEL is the dot clock output select pin. It is used to select the output mode of the dot clock signal output pin. If CLKSEL is low: A signal with the opposite phase from the SCLK pin is output from the CLK pin. If CLKSEL is high: A signal with the same phase as the SCLK pin is output from the CLKB pin.																																																
CLK	16	O																																																	
CLKB	14	O																																																	
RDATA [0:3]	9 to 12	O	Red, green and blue gray-scale data output pins. These are delayed by five clock cycles with respect to the input data. RDATA3, GDATA3 and BDATA3 are the MSBs. In mode 0: RDATA1, GDATA1 and BDATA1 are the LSBs. In this mode RDATA0, GDATA0 and BDATA0 are set low. In modes 1 and 2: RDATA0, GDATA0 and BDATA0 are the LSBs.																																																
GDATA [0:3]	18 to 21	O																																																	
BDATA [0:3]	22, 23, 25, 26	O																																																	
VSYNC	29	O	Vertical and horizontal synchronization signal outputs. To match the data signal timing, these outputs are delayed by five clock cycles with respect to their input signals. When PWRSV is low, these signals are output without being latched internally.																																																
HSYNC	30	O																																																	

LC11012-141

Symbol	Pin No.	I/O ¹	Function
HDEN	28	O	Horizontal data valid-period signal output. To match the data signal timing, this output is delayed by five clock cycles with respect to the SHDEN input signal. When PWRSV is low, this signal is output without being latched internally.
CTL	13	O	LCD control signal output. To match the data signal timing, this output is delayed by five clock cycles with respect to the SCTL input signal. When PWRSV is low, this signal is output without being latched internally.
PWRSV	7	I	Power-save control input. When this input goes low, the internal clock stops and the LSI enters power-save mode. Output data are held high. VSYNC, HSYNC, HDEN and CTL control signals, and either CLK or CLKB are output without being latched internally. Tie high or leave open for normal operation.

1. I = input, O = output

Specifications (Electrical characteristics values are provisional only and are subject to change.)

Absolute Maximum Ratings at V_{SS} = 0V

Parameter	Symbol	Ratings	Unit
Maximum supply voltage	V _{DD} max	−0.3 to +7.0	V
Input/output voltage	V _I , V _O	−0.3 to V _{DD} + 0.3	V
Operating temperature	T _{opr}	0 to +70	°C
Storage temperature	T _{stg}	−40 to +125	°C

Electrical Characteristics at an operating voltage of 5.0V

Allowable Operating Ranges at Ta = 0 to +70°C

Parameter	Symbol	min	typ	max	Unit
Supply voltage	V _{DD}	4.5	5.0	5.5	V
Input voltage	V _{IN}	0	−	V _{DD}	V
Clock frequency	f _{clk}	−	−	40	MHz

DC Characteristics at Ta = 0 to +70°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V

Parameter	Symbol	Conditions	min	typ	max	Unit
High-level input voltage	V _{IH}	TTL compatible	2.2	−	−	V
Low-level input voltage	V _{IL}	TTL compatible	−	−	0.8	V
High-level output voltage	V _{OH}	I _{OH} = −2mA	2.4	−	−	V
Low-level output voltage	V _{OL}	I _{OL} = 2mA	−	−	0.4	V
Current dissipation (1)	I _{CC}	Note 1	−	45	70	mA
Current dissipation (2)	I _{CPS}	Note 2	−	9	12	mA
Current dissipation (3)	I _{CST}	Note 3	−	−	200	μA

Notes. 1. f_{clk} = 25.175MHz, V_{DD} = 5.0V, C_L = 15pF, (measured with VGA timing)
2. PWRSV = low, f_{clk} = 25.175MHz, V_{DD} = 5.0V, C_L = 15pF (control signals)
3. V_{DD} = 5.0V, all output pins = open, all input pins = V_{DD} or V_{SS}

Switching Characteristics at Ta = 0 to +70°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V, C_L = 15pF

Parameter	Symbol	min	typ	max	Unit
Dot clock cycle time	T _{dclk}	25	−	−	ns
Hsync low-level pulse width	T _{hpw}	2T _{dclk}	−	−	ns
Vsync low-level pulse width	T _{vpw}	2T _{dclk}	−	−	ns
Data setup time	T _{dsu}	5	−	−	ns
Data hold time	T _{dhd}	5	−	−	ns
Control signal setup time	T _{csu}	5	−	−	ns

LC11012-141

Parameter	Symbol	min	typ	max	Unit
Control signal hold time	Tchd	5	–	–	ns
CLK propagation delay time	Tldhh	4	6	12	ns
CLK propagation delay time	Tldll	4	6	13	ns
CLKB propagation delay time	Tldhl	4	7	13	ns
CLKB propagation delay time	Tldlh	4	6	12	ns
Control signal propagation delay time	Ttcll	5Tdcclk + 4	5Tdcclk + 7	5Tdcclk + 13	ns
Data output propagation delay time	Tldata	5Tdcclk + 4	5Tdcclk + 7	5Tdcclk + 14	ns

Electrical Characteristics at an operating voltage of 3.3V

Allowable Operating Ranges at Ta = 0 to +70°C

Parameter	Symbol	min	typ	max	Unit
Supply voltage	V _{DD}	3.0	3.3	3.6	V
Input voltage	V _{IN}	0	–	V _{DD}	V
Clock frequency	f _{clk}	–	–	30	MHz

DC Characteristics at Ta = 0 to +70°C, V_{DD} = 3.0 to 3.6V, V_{SS} = 0V


Parameter	Symbol	Conditions	min	typ	max	Unit
High-level input voltage	V _{IH}		2.0	–	–	V
Low-level input voltage	V _{IL}		–	–	0.5	V
High-level output voltage	V _{OH}	I _{OH} = –1mA	2.4	–	–	V
Low-level output voltage	V _{OL}	I _{OL} = 1mA	–	–	0.4	V
Current dissipation (1)	I _{CC}	Note 1	–	30	45	mA
Current dissipation (2)	I _{CPS}	Note 2	–	5	8	mA
Current dissipation (3)	I _{CST}	Note 3	–	–	160	μA

Notes. 1. f_{clk} = 25.175MHz, V_{DD} = 3.3V, C_L = 15pF, (measured with VGA timing)
2. PWRSV = low, f_{clk} = 25.175MHz, V_{DD} = 3.3V, C_L = 15pF (control signals)
3. V_{DD} = 3.3V, all output pins = open, all input pins = V_{DD} or V_{SS}

Switching Characteristics at Ta = 0 to +70°C, V_{DD} = 3.0 to 3.6V, V_{SS} = 0V, C_L = 15pF


Parameter	Symbol	min	typ	max	Unit
Dot clock cycle time	Tdcclk	33	–	–	ns
Hsync low-level pulse width	Thpw	2Tdcclk	–	–	ns
Vsync low-level pulse width	Tvpw	2Tdcclk	–	–	ns
Data setup time	Tdsu	10	–	–	ns
Data hold time	Tdhd	10	–	–	ns
Control signal setup time	Tcsu	10	–	–	ns
Control signal hold time	Tchd	10	–	–	ns
CLK propagation delay time	Tldhh	5	10	23	ns
CLK propagation delay time	Tldll	5	10	23	ns
CLKB propagation delay time	Tldhl	5	11	25	ns
CLKB propagation delay time	Tldlh	5	10	22	ns
Control signal propagation delay time	Ttcll	5Tdcclk + 5	5Tdcclk + 10	5Tdcclk + 25	ns
Data output propagation delay time	Tldata	5Tdcclk + 5	5Tdcclk + 11	5Tdcclk + 27	ns

Timing Diagrams

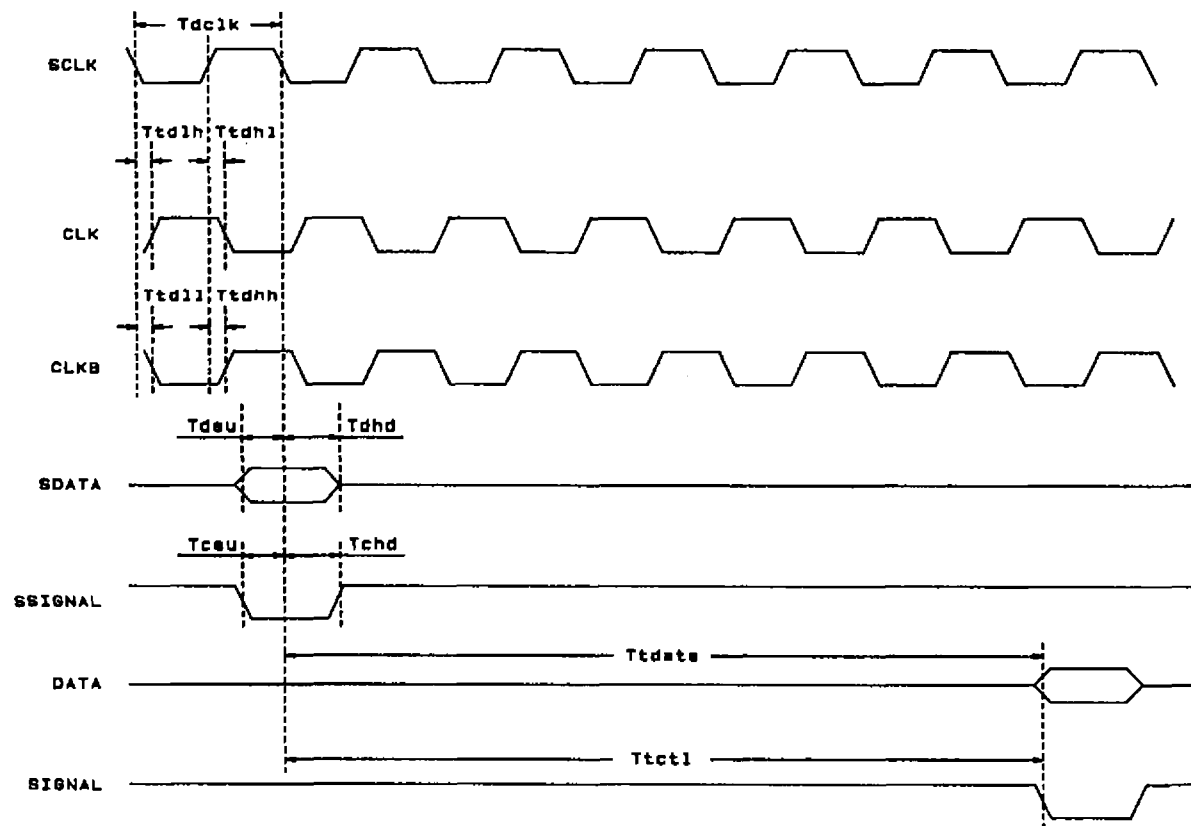

A03728

SSIGNAL refers to the SHDEN, SCTL, BYPASS and PWRSV signals.
 SIGNAL refers to the HDEN and CTL signals.

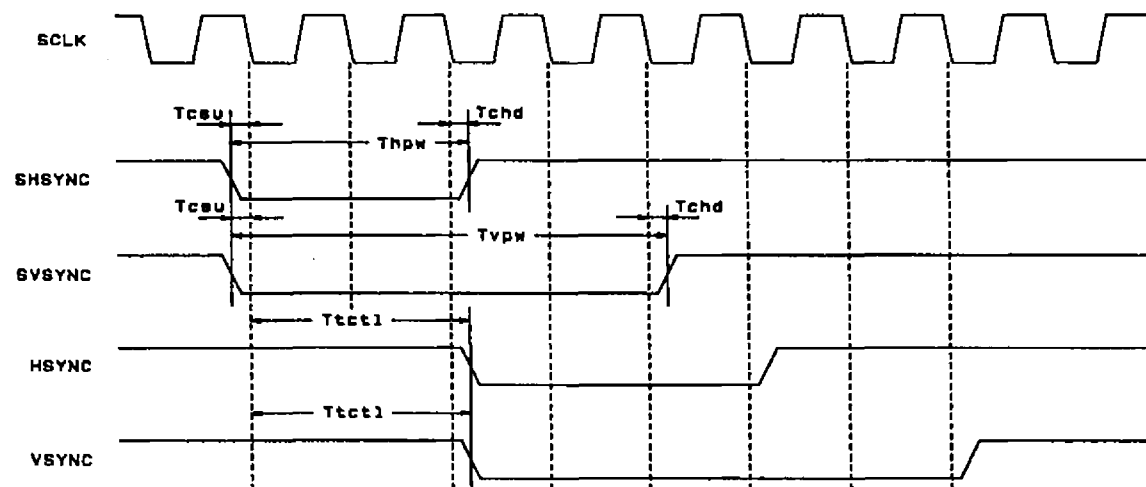

A03729

Usage Note

Since this LSI performs spatial modulation using an error diffusion algorithm, patterns that differ from the original images may be displayed for certain display pattern and gray-scale mode combinations.

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees, jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1996. Specifications and information herein are subject to change without notice.