



LM161/LM261/LM361

High Speed Differential Comparators

General Description

The LM161/LM261/LM361 is a very high speed differential input, complementary TTL output voltage comparator with improved characteristics over the SE529/NE529 for which it is a pin-for-pin replacement. The device has been optimized for greater speed performance and lower input offset voltage. Typically delay varies only 3 ns for over-drive variations of 5 mV to 500 mV. It may be operated from op amp supplies ($\pm 15V$).


Complementary outputs having maximum skew are provided. Applications involve high speed analog to digital converters and zero-crossing detectors in disk file systems.

Features

- Independent strobes
- Guaranteed high speed 20 ns max
- Tight delay matching on both outputs
- Complementary TTL outputs
- Operates from op amp supplies $\pm 15V$
- Low speed variation with overdrive variation
- Low input offset voltage
- Versatile supply voltage range

Connection Diagrams

Dual-In-Line Package

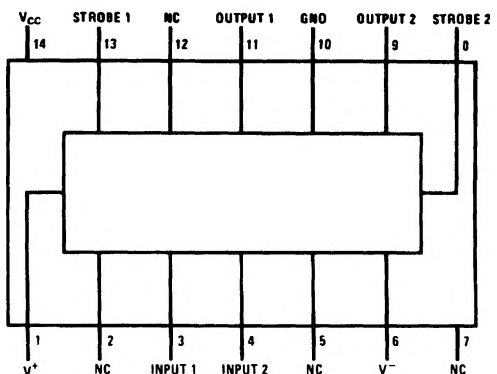


TL/H/5708-2

Top View

Order Number LM161J, LM261J, LM361J,
LM361M or LM361N
See NS Package Number J14A, M14A or N14A


Metal Can Package

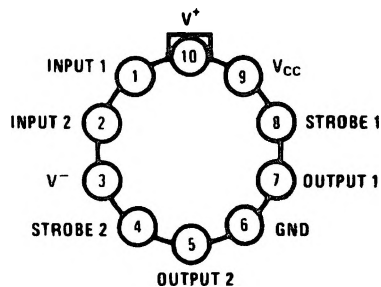

TL/H/5708-3

Order Number LM161H, LM261H or LM361H
See NS Package H10C

Logic Diagram

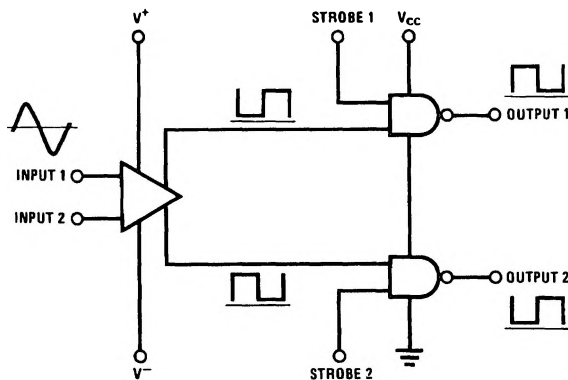

TL/H/5708-4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, contact the National Semiconductor Sales Office/Distributors for availability and specifications.
(Note 4)

Positive Supply Voltage, V^+	+16V
Negative Supply Voltage, V^-	-16V
Gate Supply Voltage, V_{CC}	+7V
Output Voltage	+7V
Differential Input Voltage	$\pm 5V$
Input Common Mode Voltage	$\pm 6V$
Power Dissipation	600 mW
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	T_{MIN} T_{MAX}
LM161	-55°C to +125°C
LM261	-25°C to +85°C
LM361	0°C to +70°C
Lead Temp. (Soldering, 10 seconds)	260°C
For Any Device Lead Below V^-	0.3V

Operating Conditions

	Min	Typ	Max
Supply Voltage V^+			
LM161/LM261	5V		15V
LM361	5V		15V
Supply Voltage V^-			
LM161/LM261	-6V		-15V
LM361	-6V		-15V
Supply Voltage V_{CC}			
LM161/LM261	4.5V	5V	5.5V
LM361	4.75V	5V	5.25V
ESD rating to be determined.			
Soldering Information			
Dual-In-Line Package			
Soldering (10 seconds)			260°C
Small Outline Package			
Vapor Phase (60 seconds)			215°C
Infrared (15 seconds)			220°C
See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.			

Electrical Characteristics ($V^+ = +10V$, $V_{CC} = +5V$, $V^- = -10V$, $T_{MIN} \leq T_A \leq T_{MAX}$, unless noted)

Parameter	Conditions	Limits						Units
		LM161/LM261			LM361			
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage			1	3		1	5	mV
Input Bias Current	T _A = 25°C		5	20		10	30	μA μA
Input Offset Current	T _A = 25°C		2	3		2	5	μA μA
Voltage Gain	T _A = 25°C		3			3		V/mV
Input Resistance	T _A = 25°C, f = 1 kHz		20			20		kΩ
Logical "1" Output Voltage	V _{CC} = 4.75V, I _{SOURCE} = −0.5 mA	2.4	3.3		2.4	3.3		V
Logical "0" Output Voltage	V _{CC} = 4.75V, I _{SINK} = 6.4 mA			0.4			0.4	V
Strobe Input "1" Current	V _{CC} = 5.25V, V _{STROBE} = 2.4V			200			200	μA
Strobe Input "0" Current	V _{CC} = 5.25V, V _{STROBE} = 0.4V			−1.6			−1.6	mA
Strobe Input "0" Voltage	V _{CC} = 4.75V			0.8			0.8	V
Strobe Input "1" Voltage	V _{CC} = 4.75V	2			2			V
Output Short Circuit Current	V _{CC} = 5.25V, V _{OUT} = 0V	−18		−55	−18		−55	mA

Electrical Characteristics (Continued)(V⁺ = +10V, V_{CC} = +5V, V⁻ = -10V, T_{MIN} ≤ T_A ≤ T_{MAX}, unless noted)










Parameter	Conditions	Limits						Units
		LM161/LM261			LM361			
		Min	Typ	Max	Min	Typ	Max	
Supply Current I ⁺	V ⁺ = 10V, V ⁻ = -10V, V _{CC} = 5.25V, -55°C ≤ T _A ≤ 125°C			4.5				mA
Supply Current I ⁺	V ⁺ = 10V, V ⁻ = -10V, V _{CC} = 5.25V, 0°C ≤ T _A ≤ 70°C						5	mA
Supply Current I ⁻	V ⁺ = 10V, V ⁻ = -10V, V _{CC} = 5.25V, -55°C ≤ T _A ≤ 125°C			10				mA
Supply Current I ⁻	V ⁺ = 10V, V ⁻ = -10V, V _{CC} = 5.25V, 0°C ≤ T _A ≤ 70°C						10	mA
Supply Current I _{CC}	V ⁺ = 10V, V ⁻ = -10V, V _{CC} = 5.25V, -55°C ≤ T _A ≤ 125°C			18				mA
Supply Current I _{CC}	V ⁺ = 10V, V ⁻ = -10V, V _{CC} = 5.25V, 0°C ≤ T _A ≤ 70°C						20	mA
Transient Response	V _{IN} = 50 mV overdrive (Note 3)							
Propagation Delay Time (t _{pd(0)})	T _A = 25°C		14	20		14	20	ns
Propagation Delay Time (t _{pd(1)})	T _A = 25°C		14	20		14	20	ns
Delay Between Output A and B	T _A = 25°C		2	5		2	5	ns
Strobe Delay Time (t _{pd(0)})	T _A = 25°C		8			8		ns
Strobe Delay Time (t _{pd(1)})	T _A = 25°C		8			8		ns

Note 1: The device may be damaged by use beyond the maximum ratings.**Note 2:** Typical thermal impedances are as follows:

	H Package	J Package	N Package
θ _{JA}	230°C/W (Still Air) 190°C/W (400 LF/Min Air Flow)	112°C/W	105°C/W
θ _{JC}	25°C/W		

Note 3: Measurements using AC Test circuit, Fanout = 1. The devices are faster at low supply voltages.**Note 4:** Refer to RETS161X for LM161H and LM161J military specifications.


Typical Performance Characteristics

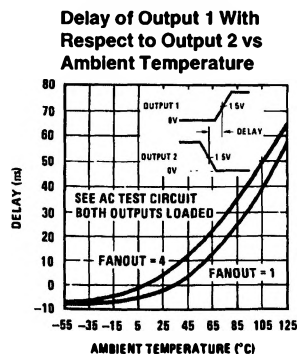

TL/H/5708-5


AC Test Circuit

$V_{IN} = \pm 50 \text{ mV}$ FANOUT = 1 FANOUT = 4
 $V^+ = +10V$ $R = 2.4k$ $R = 680\Omega$
 $V^- = -10V$ $C = 15 \text{ pF}$ $C = 30 \text{ pF}$
 $V_{CC} = 5.25V$

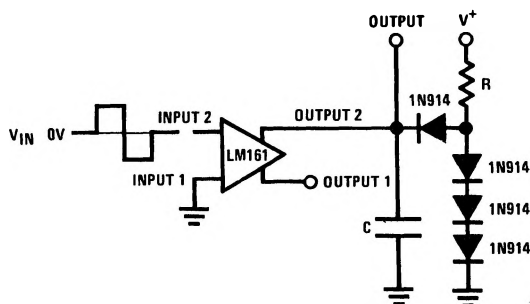

TL/H/5708-6

Schematic Diagram

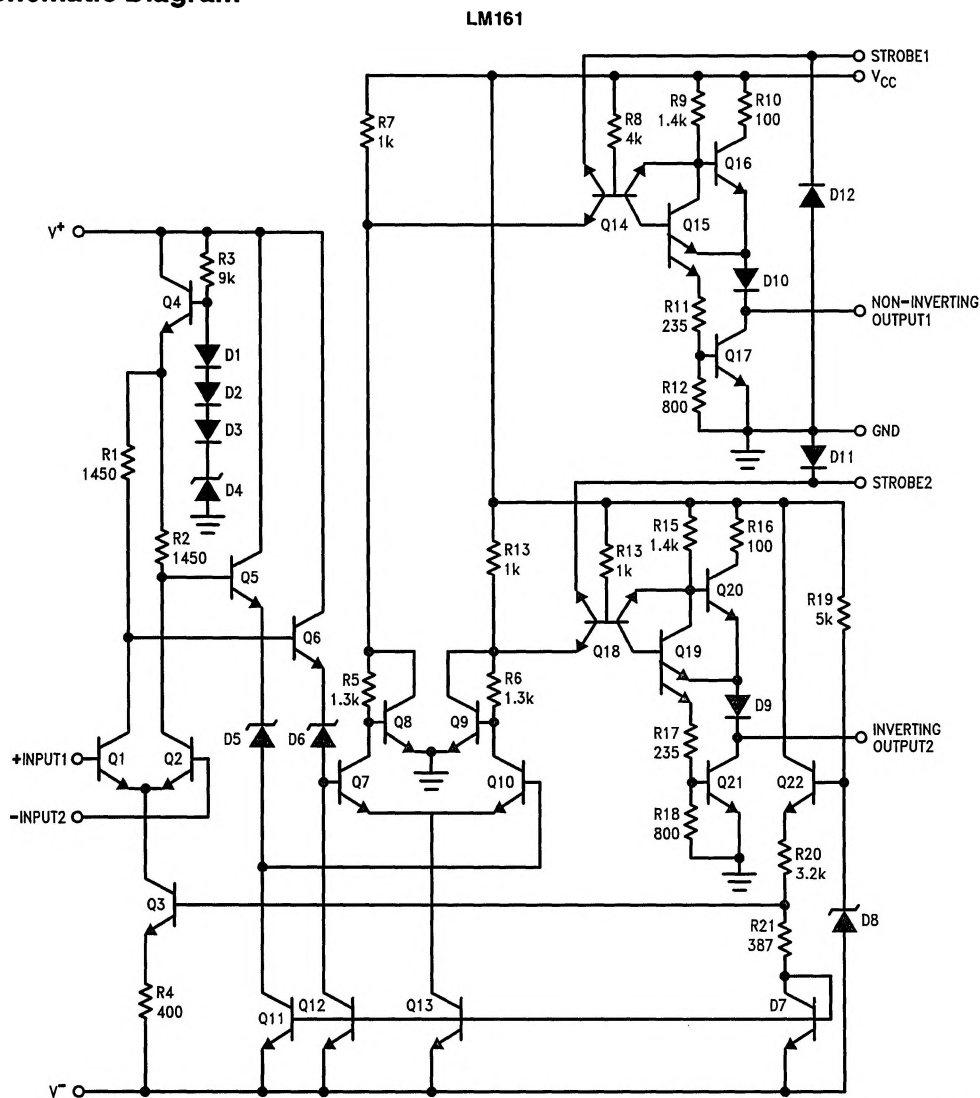

R10, R16: 85
R11, R17: 205

TL/H/5708-1