


S54157-B,F,W • N74157-B,F • S54158-B,F,W • N74158-B,F

DIGITAL 54/74 TTL SERIES

DESCRIPTION

The S54157/N74157 and S54158/N74158 are identical with the exception of the S54158/N74158 being inverted. These devices are logical implementations of a four-pole two-position switch, with the position of the switch being set by the logic levels supplied to the one select input. Both assertion and negation outputs are provided. The enable input (E) is active low. When it is not activated the negation output is high and the assertion output is low regardless of all other inputs. The devices provide the ability, in one package, to select four bits of either data or control from two sources. By proper manipulation of the inputs, it can generate four functions of two variables with one variable common. Thus any number of random logic elements used to generate unusual truth tables can be replaced. All outputs are low when disabled (enable high). Both inputs and outputs are buffered.

PIN CONFIGURATION

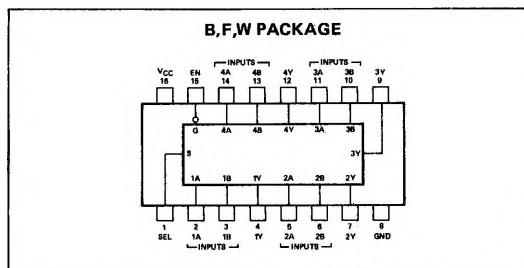

S54/N74157

TRUTH TABLE

INPUTS		OUTPUT	
STROBE	SELECT	A B	Y
H	X	X X	L
L	L	L X	L
L	L	H X	H
L	H	X L	L
L	H	X H	H


S54/N74158

TRUTH TABLE

INPUTS		OUTPUT	
STROBE	SELECT	A B	Y
H	X	X X	H
L	L	L X	H
L	L	H X	L
L	H	X L	H
L	H	X H	L


LOGIC DIAGRAM

S54/N74157

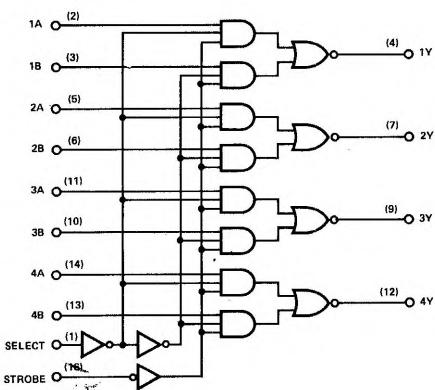

LOGIC DIAGRAM

S54/N74158

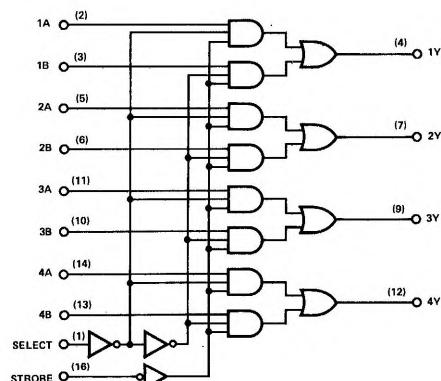

RECOMMENDED OPERATING CONDITIONS

	S54157/58			N74157/58			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
	4.5	5	5.5	4.75	5	5.25	V
Supply Voltage V_{CC} Normalized Fan-Out from each Output, N High Logic Level Low Logic Level Operating Free-Air Temperature, T_A				20 10 0		20 10 70	°C
-55	25	125			25		

ELECTRICAL CHARACTERISTICS (over operating free-air temperature range unless otherwise noted)

PARAMETER	TEST CONDITIONS*	S54157/58			N74157/58			UNIT
		MIN	TYP**	MAX	MIN	TYP**	MAX	
V_{IH} V_{IL} V_I	High-level input voltage Low-level input voltage Input clamp voltage		2		0.8 -1.5	2	0.8 -1.5	V V V
V_{OH} V_{OL}	High-level output voltage Low-level output voltage	$V_{CC} = \text{MAX}$, $V_{CC} = \text{MIN}$, $V_{IL} = 0.8V$,	$I_I = -12\text{mA}$ $V_{IH} = 2V$, $I_{OH} = -800\mu\text{A}$	2.4		2.4		V V
I_I I_{IH} I_{IL}	Input current at maximum input voltage High-level input current Low-level input current	$V_{CC} = \text{MIN}$, $V_{IL} = 0.8V$,	$V_{IH} = 2V$, $I_{OL} = 16\text{mA}$		0.4		0.4	V V mA mA
I_{OS}	Short-circuit output current†	$V_{CC} = \text{MAX}$			1		1	mA
I_{CC}	Supply current	$V_{CC} = \text{MAX}$		-20	40 -1.6	-55 -18	-55	μA mA
				30	48	30	48	ns

SWITCHING CHARACTERISTICS, $V_{CC} = 5V$, $T_A = 25^\circ\text{C}$, $N = 10$

PARAMETER	FROM	TO	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PHL} t_{PLH}	Data Data	Output Output	$C_L = 15\text{pF}$, $R_L = 400$		9 9	14 14	ns ns
t_{PHL} t_{PLH}	Enable Enable	Any Output Any Output		14	21		ns
t_{PHL} t_{PLH}	Select Select	Any Output Any Output		13	20		ns
t_{PHL} t_{PLH}	Select Select	Any Output Any Output		18 15	27 23		ns

* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

** All typical values are at $V_{CC} = 5V$, $T_A = 25^\circ\text{C}$.

† Not more than one output should be shorted at a time.