


# DUAL 4-INPUT POSITIVE NAND BUFFER

**S5440  
N7440**

S5440-A,F,W • N7440-A,F

DIGITAL 54/74 TTL SERIES


## SCHEMATIC (each gate)

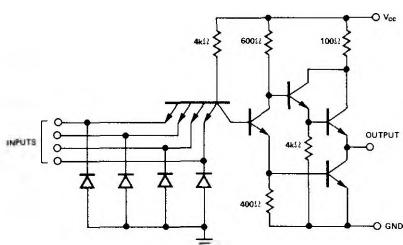


NOTE: Component values shown are nominal.

## PIN CONFIGURATIONS

### W PACKAGE

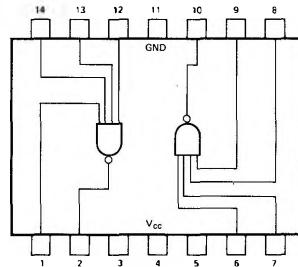

### A,F PACKAGE

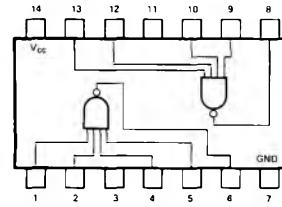

## RECOMMENDED OPERATING CONDITIONS

		MIN	NOM	MAX	UNIT
Supply Voltage $V_{CC}$ :	S5440 Circuits	4.5	5	5.5	V
	N7440 Circuits	4.75	5	5.25	V
Normalized Fan-Out from Output, N				10	
Operating Free-Air Temperature Range, $T_A$ :	S5440 Circuits	-55	25	125	$^{\circ}\text{C}$
	N7440 Circuits	0	25	70	$^{\circ}\text{C}$

## ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER	TEST CONDITIONS*	MIN	TYP**	MAX	UNIT
$V_{in(1)}$	$V_{CC} = \text{MIN}$		2		V
$V_{in(0)}$	$V_{CC} = \text{MIN}$ ,			0.8	V
$V_{out(1)}$	$V_{CC} = \text{MIN}$ , $I_{load} = -1.2\text{mA}$	2.4	3.3		V
$V_{out(0)}$	$V_{CC} = \text{MIN}$ , $I_{sink} = 48\text{mA}$		0.28	0.4	V
$I_{in(0)}$	$V_{CC} = \text{MAX}$ ,			-1.6	mA
$I_{in(1)}$	$V_{CC} = \text{MAX}$ , $V_{CC} = \text{MAX}$ , $V_{in} = 5.5\text{V}$			40 1	$\mu\text{A}$ mA
$I_{OS}$	$V_{CC} = \text{MAX}$ ,	 S5440 N7440	-20 -18	-70 -70	mA mA

<sup>†</sup> Short circuit output current

SIGNETICS DIGITAL 54/74 TTL SERIES - S5440 • N7440

ELECTRICAL CHARACTERISTICS (Cont'd)

PARAMETER	TEST CONDITIONS*	MIN	TYP **	MAX	UNIT
I <sub>CC(0)</sub> Logical 0 level supply current	V <sub>CC</sub> = MAX, V <sub>in</sub> = 5V		17	27	mA
I <sub>CC(1)</sub> Logical 1 level supply current	V <sub>CC</sub> = MAX, V <sub>in</sub> = 0		4	6.8	mA

SWITCHING CHARACTERISTICS, V<sub>CC</sub> = 5V, T<sub>A</sub> = 25°C, N = 30

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>pd0</sub> Propagation delay time to logical 0 level	C <sub>L</sub> = 15pF, R <sub>L</sub> = 133Ω		8	15	ns
t <sub>pd1</sub> Propagation delay time to logical 1 level	C <sub>L</sub> = 15pF, R <sub>L</sub> = 133Ω		13	22	ns

\* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

\*\* All typical values are at V<sub>CC</sub> = 5V, T<sub>A</sub> = 25°C.

† Not more than one output should be shorted at a time.