



S54H20-A,F,W • N74H20-A,F

DIGITAL 54/74 TTL SERIES

SCHEMATIC (each gate)

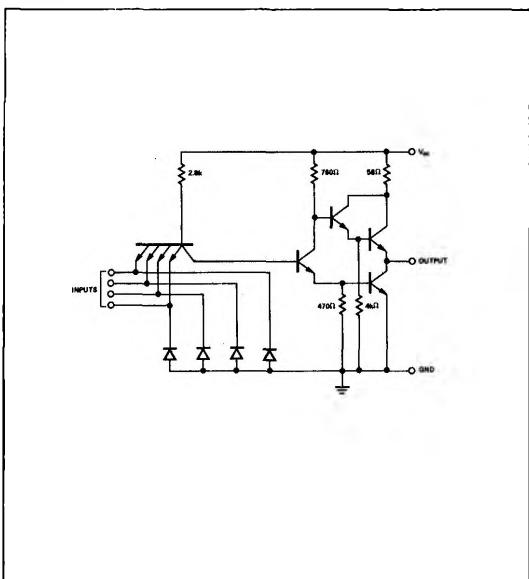

PIN CONFIGURATIONS

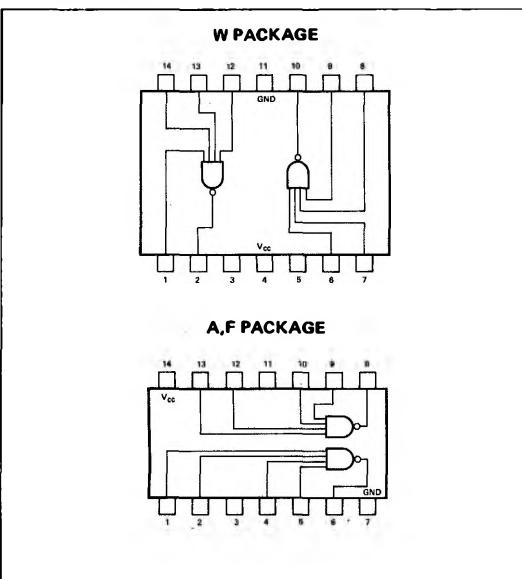

RECOMMENDED OPERATING CONDITIONS

		MIN	NOM	MAX	UNIT
Supply Voltage, V_{CC} :	S54H20 Circuits	4.5	5	5.5	V
	N74H20 Circuits	4.75	5	5.25	V
Normalized Fan-Out from each Output, N				10	
Operating Free-Air Temperature Range, T_A :	S54H20 Circuits	-55	25	125	°C
	N74H20 Circuits	0	25	70	°C

ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER	TEST CONDITIONS*	TEST CONDITIONS*			UNIT
		MIN	TYP**	MAX	
$V_{in(1)}$	Logical 1 input voltage required at all input terminals to ensure logical 0 level at output	$V_{CC} = \text{MIN}$		2	V
$V_{in(0)}$	Logical 0 input voltage required of any input terminal to ensure logical 1 level at output	$V_{CC} = \text{MIN}$,		0.8	V
$V_{out(1)}$	Logical 1 output voltage	$V_{CC} = \text{MIN}$, $I_{load} = -500\mu\text{A}$	$V_{in} = 0.8\text{V}$,	2.4	V
$V_{out(0)}$	Logical 0 output voltage	$V_{CC} = \text{MIN}$, $I_{sink} = 20\text{mA}$	$V_{in} = 2\text{V}$,	0.4	V
$I_{in(0)}$	Logical 0 level input current (each input)	$V_{CC} = \text{MAX}$,	$V_{in} = 0.4\text{V}$	-2	mA
$I_{in(1)}$	Logical 1 level input current (each input)	$V_{CC} = \text{MAX}$, $V_{CC} = \text{MAX}$,	$V_{in} = 2.4\text{V}$, $V_{in} = 5.5\text{V}$	50 1	μA mA
I_{OS}	Short circuit output current†	$V_{CC} = \text{MAX}$,		-40	-100
$I_{CC(0)}$	Logical 0 level supply current	$V_{CC} = \text{MAX}$,	$V_{in} = 4.5\text{V}$	13	20
$I_{CC(1)}$	Logical 1 level supply current	$V_{CC} = \text{MAX}$,	$V_{in} = 0$	5	8.4

DIGITAL 54/74 TTL SERIES ■ S54H20, N74H20

SWITCHING CHARACTERISTICS, $V_{CC} = 5V$, $T_A = 25^\circ C$, $N = 10$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{pd0} Propagation delay time to logical 0 level	$C_L = 25\text{pF}$, $R_L = 280\Omega$	7	10		ns
t_{pd1} Propagation delay time to logical 1 level	$C_L = 25\text{pF}$, $R_L = 280\Omega$	6	10		ns

* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

** All typical values are at $V_{CC} = 5V$, $T_A = 25^\circ C$.

† Not more than one output should be shorted at a time and duration of short circuit test should not exceed 1 second.