



S54H21-A,F,W • N74H21-A,F

DIGITAL 54/74 TTL SERIES

### SCHMATIC (each gate)

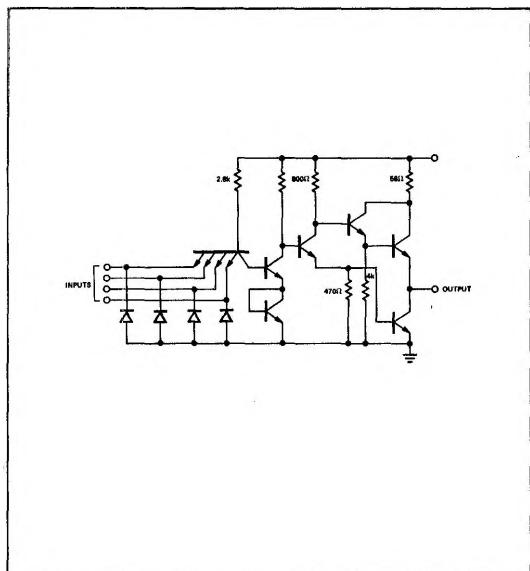

### PIN CONFIGURATIONS

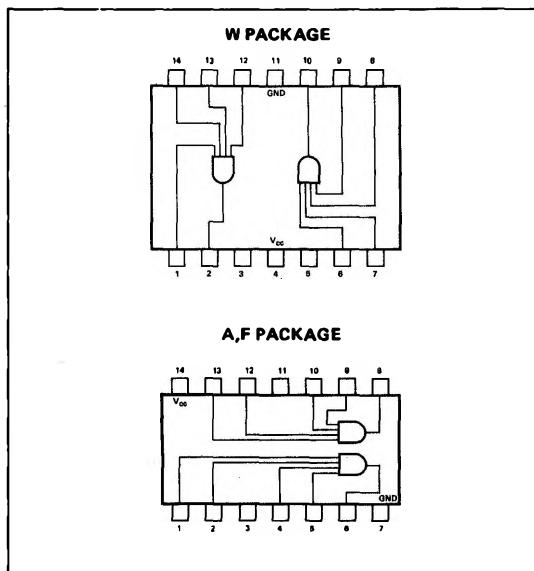

### RECOMMENDED OPERATING CONDITIONS

		MIN	NOM	MAX	UNIT
Supply Voltage $V_{CC}$ :	S54H21 Circuits N74H21 Circuits	4.5	5	5.5	V
Normalized Fan-Out from each Output, N		4.75	5	5.25	V
Operating Free-Air Temperature Range, $T_A$ :	S54H21 Circuits N74H21 Circuits	-55	25	10	°C
		0	25	125	°C
				70	°C

### ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER	TEST CONDITIONS*	TEST CONDITIONS*			UNIT
		MIN	TYP**	MAX	
$V_{in(1)}$	Logical 1 input voltage required at all input terminals to ensure logical 1 level at output	$V_{CC} = \text{MIN},$		2	V
$V_{in(0)}$	Logical 0 input voltage required of any input terminal to ensure logical 0 level at output	$V_{CC} = \text{MIN},$		0.8	V
$V_{out(1)}$	Logical 1 output voltage	$V_{CC} = \text{MIN},$ $I_{load} = -500\mu\text{A}$	$V_{in(1)} = 2\text{V},$	2.4	V
$V_{out(0)}$	Logical 0 output voltage	$V_{CC} = \text{MIN},$ $I_{sink} = 20\text{mA}$	$V_{in(0)} = 0.8\text{V},$	0.4	V
$I_{in(0)}$	Logical 0 level input current (each input)	$V_{CC} = \text{MAX},$	$V_{in} = 0.4\text{V}$	-2	mA
$I_{in(1)}$	Logical 1 level input current (each input)	$V_{CC} = \text{MAX}$ $V_{CC} = \text{MAX},$	$V_{in} = 2.4\text{V}$ $V_{in} = 5.5\text{V}$	50 1	$\mu\text{A}$ mA
$I_{OS}$	Short circuit output current†	$V_{CC} = \text{MAX},$	$V_{in} = 4.5\text{V}$	-40	-100
$I_{CC(0)}$	Logical 0 level supply current	$V_{CC} = \text{MAX},$	$V_{in} = 0$	20	32
$I_{CC(1)}$	Logical 1 level supply current	$V_{CC} = \text{MAX},$	$V_{in} = 4.5\text{V}$	12	20

**DIGITAL 54/74 TTL SERIES ■ S54H21, N74H21**SWITCHING CHARACTERISTICS,  $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ ,  $N = 10$ 

PARAMETER	TEST CONDITIONS	MIN	TYP <sup>**</sup>	MAX	UNIT
$t_{pd0}$ Propagation delay time to logical 0 level	$C_L = 25pF$ , $R_L = 280\Omega$		8.8	12	ns
$t_{pd1}$ Propagation delay time to logical 1 level	$C_L = 25pF$ , $R_L = 280\Omega$		7.6	12	ns

\* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

\*\* All typical values are at  $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ .

t Not more than one output should be shorted at a time and duration of short circuit test should not exceed 1 second.