

# DUAL 2-WIDE 2-INPUT AND-OR-INVERT GATES

S54H50

S54H51


N74H50

N74H51


S54H50-A,F,W • S54H51-A,F,W • N74H50-A,F • N74H51-A,F

DIGITAL 54/74 TTL SERIES

## SCHEMATIC (each gate)

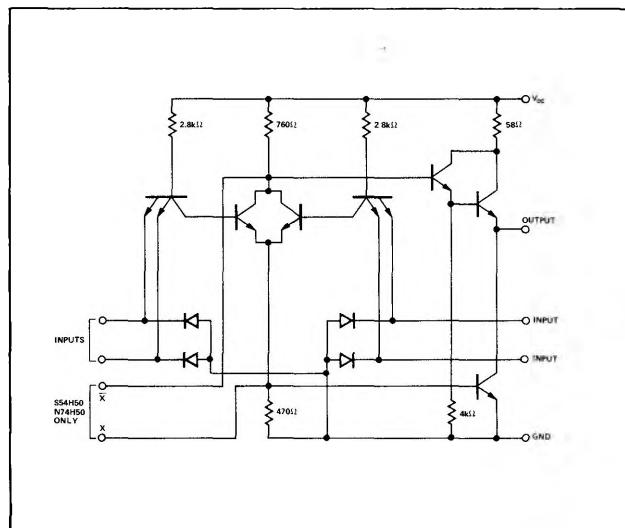

## PIN CONFIGURATIONS

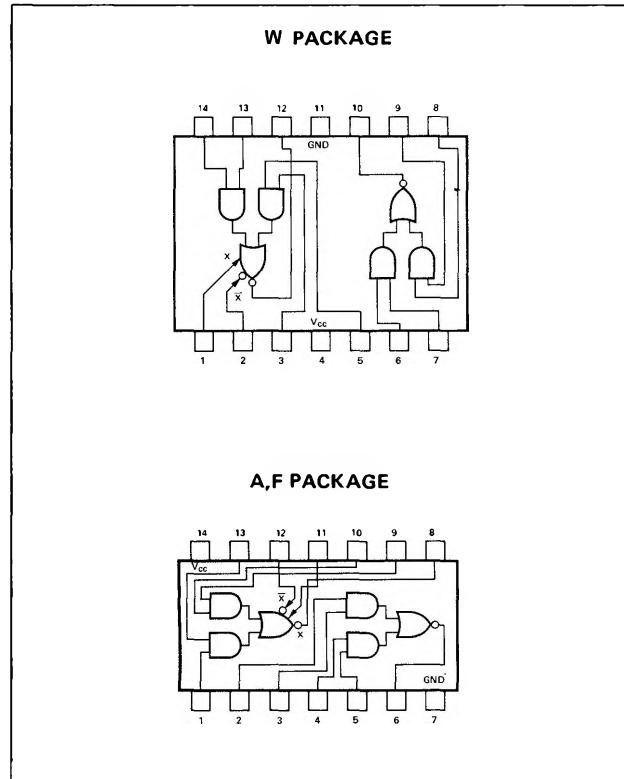

### NOTES:

1. Component values are nominal.
2. Both expander inputs are used simultaneously for expanding.
3. If expander is not used leave X and  $\bar{X}$  pins open.
4. Expander inputs X and  $\bar{X}$  are functional on the S54H50 and N74H50 circuits only. Make no external connection to X and  $\bar{X}$  pins of the S54H51 and N74H51.
5. A total of four S54H60/N74H60 expander gates or one S54H62/N74H62 expander gate may be connected to the expander inputs.

## RECOMMENDED OPERATING CONDITIONS

	MIN	NOM	MAX	UNIT
Supply Voltage $V_{CC}$ : S54H50, S54H51 Circuits	4.5	5	5.5	V
N74H50, N74H51 Circuits	4.75	5	5.25	V
Normalized Fan-Out from each Output, N			10	
Operating Free-Air Temperature Range, $T_A$ : S54H50, S54H51 Circuits	-55	25	125	$^{\circ}C$
N74H50, N74H51 Circuits	0	25	70	$^{\circ}C$

## ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER	TEST CONDITIONS*		MIN	TYP†	MAX	UNIT
$V_{in(1)}$	Logical 1 input voltage required at both input terminals of either AND section to ensure logical 0 at output	$V_{CC} = \text{MIN}$		2		V
$V_{in(0)}$	Logical 0 input voltage required at one input terminal of each AND section to ensure logical 1 at output	$V_{CC} = \text{MIN}$			0.8	V
$V_{out(1)}$	Logical 1 output voltage	$V_{CC} = \text{MIN}$ , $I_{load} = -500\mu\text{A}$	$V_{in} = 0.8\text{V}$ ,	2.4		V
$V_{out(0)}$	Logical 0 output voltage	$V_{CC} = \text{MIN}$ , $I_{sink} = 20\text{mA}$	$V_{in} = 2\text{V}$ ,		0.4	V
$I_{in(0)}$	Logical 0 level input current (each input)	$V_{CC} = \text{MAX}$ ,	$V_{in} = 0.4\text{V}$		-2	mA
$I_{in(1)}$	Logical 1 level input current (each input)	$V_{CC} = \text{MAX}$ , $V_{CC} = \text{MAX}$ ,	$V_{in} = 2.4\text{V}$ , $V_{in} = 5.5\text{V}$		50 1	$\mu\text{A}$ mA

SIGNETICS DIGITAL 54/74 TTL SERIES — S54H50 • S54H51 • N74H50 • N74H51

ELECTRICAL CHARACTERISTICS (Cont'd)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{OS}$	Short circuit output current **	$V_{CC} = \text{MAX}$	-40	-100	mA
$I_{CC(0)}$	Logical 0 level supply current	$V_{CC} = \text{MAX}, V_{in} = 4.5V$	15.2	24	mA
$I_{CC(1)}$	Logical 1 level supply current	$V_{CC} = \text{MAX}, V_{in} = 0$	8.2	12.8	mA

ELECTRICAL CHARACTERISTICS (S54H50 circuits only) using expander inputs,  $V_{CC} = 4.5V, T_A = -55^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{inX}$	$V_X = 1.4V$			-5.85	mA
$V_{BE(Q)}$	$I_{sink} = 20\text{mA}, I_1 = 700\mu\text{A}, R_1 = 0$			1	V
$V_{out(1)}$	$I_{load} = -500\mu\text{A}, I_1 = 320\mu\text{A}, I_2 = -320\mu\text{A}$	2.4			V
$V_{out(0)}$	$I_{sink} = 20\text{mA}, I_1 = 470\mu\text{A}, R_1 = 68\Omega$			0.4	V

ELECTRICAL CHARACTERISTICS (N74H50 circuits only) using expander inputs,  $V_{CC} = 4.5V, T_A = 0^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{inX}$	$V_X = 1.4V$			-6.3	mA
$V_{BE(Q)}$	$I_{sink} = 20\text{mA}, I_1 = 1.1\text{mA}, R_1 = 0$			1	V
$V_{out(1)}$	$I_{load} = -500\mu\text{A}, I_1 = 570\mu\text{A}, I_2 = -570\mu\text{A}$	2.4			V
$V_{out(0)}$	$I_{sink} = 20\text{mA}, I_1 = 600\mu\text{A}, R_1 = 63\Omega$			0.4	V

SWITCHING CHARACTERISTICS,  $V_{CC} = 5V, T_A = 25^\circ\text{C}, N = 10$ , expander pins are open

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{pd0}$	$C_L = 25\text{pF}, R_L = 280\Omega$	6.2	11		ns
$t_{pd1}$	$C_L = 25\text{pF}, R_L = 280\Omega$	6.8	11		ns

SWITCHING CHARACTERISTICS, (S54H50/N74H50 circuits only),  $V_{CC} = 5V, T_A = 25^\circ\text{C}, N = 10, C_X = 15\text{ pF}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{pd0}$	$C_L = 25\text{pF}, R_L = 280\Omega$	7.4			ns
$t_{pd1}$	$C_L = 25\text{pF}, R_L = 280\Omega$	11			ns

\* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type. Expander pins are open.

\*\* Not more than one output should be shorted at a time, and duration of short circuit test should not exceed 1 second.

† All typical values are at  $V_{CC} = 5V, T_A = 25^\circ\text{C}$ .