

Advanced Power MOSFET

SFP9510

FEATURES


- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- 175°C Operating Temperature
- Extended Safe Operating Area
- Lower Leakage Current : -10 μ A (Max.) @ $V_{DS} = -100V$
- Low $R_{DS(on)}$: 0.912 Ω (Typ.)

$BV_{DSS} = -100 V$

$R_{DS(on)} = 1.2 \Omega$

$I_D = -3.6 A$

TO-220



1.Gate 2. Drain 3. Source

Absolute Maximum Ratings

| Symbol | Characteristic | Value | Units |
|----------------|---|-------------|----------------------|
| V_{DSS} | Drain-to-Source Voltage | -100 | V |
| I_D | Continuous Drain Current ($T_C=25^\circ C$) | -3.6 | A |
| | Continuous Drain Current ($T_C=100^\circ C$) | -2.5 | |
| I_{DM} | Drain Current-Pulsed ① | -14 | A |
| V_{GS} | Gate-to-Source Voltage | ± 20 | V |
| E_{AS} | Single Pulsed Avalanche Energy ② | 52 | mJ |
| I_{AR} | Avalanche Current ① | -3.6 | A |
| E_{AR} | Repetitive Avalanche Energy ① | 3.2 | mJ |
| dv/dt | Peak Diode Recovery dv/dt ③ | -6.5 | V/ns |
| P_D | Total Power Dissipation ($T_C=25^\circ C$) | 32 | W |
| | Linear Derating Factor | 0.21 | $W/\text{ }^\circ C$ |
| T_J, T_{STG} | Operating Junction and Storage Temperature Range | -55 to +175 | $^\circ C$ |
| | Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5-seconds | 300 | |

Thermal Resistance

| Symbol | Characteristic | Typ. | Max. | Units |
|-----------------|---------------------|------|------|--------------|
| $R_{\theta JC}$ | Junction-to-Case | -- | 4.69 | $^\circ C/W$ |
| $R_{\theta CS}$ | Case-to-Sink | 0.5 | -- | |
| $R_{\theta JA}$ | Junction-to-Ambient | -- | 62.5 | |

SFP9510

P-CHANNEL
POWER MOSFET

Electrical Characteristics ($T_C=25^\circ\text{C}$ unless otherwise specified)

| Symbol | Characteristic | Min. | Typ. | Max. | Units | Test Condition |
|-------------------------------|---|------|------|------|--------------------------|--|
| BV_{DSS} | Drain-Source Breakdown Voltage | -100 | -- | -- | V | $\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=-250\mu\text{A}$ |
| $\Delta \text{BV}/\Delta T_J$ | Breakdown Voltage Temp. Coeff. | -- | -0.1 | -- | V°C | $\text{I}_D=-250\mu\text{A}$ See Fig 7 |
| $\text{V}_{\text{GS(th)}}$ | Gate Threshold Voltage | -2.0 | -- | -4.0 | V | $\text{V}_{\text{DS}}=-5\text{V}, \text{I}_D=-250\mu\text{A}$ |
| I_{GSS} | Gate-Source Leakage , Forward | -- | -- | -100 | nA | $\text{V}_{\text{GS}}=-20\text{V}$ |
| | Gate-Source Leakage , Reverse | -- | -- | 100 | | $\text{V}_{\text{GS}}=20\text{V}$ |
| I_{DSS} | Drain-to-Source Leakage Current | -- | -- | -10 | μA | $\text{V}_{\text{DS}}=-100\text{V}$ |
| | | -- | -- | -100 | | $\text{V}_{\text{DS}}=-80\text{V}, \text{T}_C=150^\circ\text{C}$ |
| $\text{R}_{\text{DS(on)}}$ | Static Drain-Source On-State Resistance | -- | -- | 1.2 | Ω | $\text{V}_{\text{GS}}=-10\text{V}, \text{I}_D=-1.8\text{A}$ ④ |
| g_{fs} | Forward Transconductance | -- | 1.8 | -- | mS | $\text{V}_{\text{DS}}=-40\text{V}, \text{I}_D=-1.8\text{A}$ ④ |
| C_{iss} | Input Capacitance | -- | 260 | 335 | pF | $\text{V}_{\text{GS}}=0\text{V}, \text{V}_{\text{DS}}=-25\text{V}, f=1\text{MHz}$ See Fig 5 |
| C_{oss} | Output Capacitance | -- | 50 | 80 | | |
| C_{rss} | Reverse Transfer Capacitance | -- | 17 | 25 | | |
| $t_{\text{d(on)}}$ | Turn-On Delay Time | -- | 10 | 30 | ns | $\text{V}_{\text{DD}}=-50\text{V}, \text{I}_D=3.6\text{A}, \text{R}_G=24\Omega$ See Fig 13 ④⑤ |
| t_r | Rise Time | -- | 20 | 50 | | |
| $t_{\text{d(off)}}$ | Turn-Off Delay Time | -- | 25 | 60 | | |
| t_f | Fall Time | -- | 12 | 35 | | |
| Q_g | Total Gate Charge | -- | 9 | 10 | nC | $\text{V}_{\text{DS}}=-80\text{V}, \text{V}_{\text{GS}}=-10\text{V}, \text{I}_D=-3.6\text{A}$ See Fig 6 & Fig 12 ④⑤ |
| Q_{gs} | Gate-Source Charge | -- | 1.5 | -- | | |
| Q_{gd} | Gate-Drain("Miller") Charge | -- | 4.3 | -- | | |

Source-Drain Diode Ratings and Characteristics

| Symbol | Characteristic | Min. | Typ. | Max. | Units | Test Condition |
|------------------------|---------------------------|------|------|------|-------|--|
| I_s | Continuous Source Current | -- | -- | -3.6 | A | Integral reverse pn-diode in the MOSFET |
| I_{SM} | Pulsed-Source Current ① | -- | -- | -14 | | |
| V_{SD} | Diode Forward Voltage ④ | -- | -- | -3.8 | V | $\text{T}_J=25^\circ\text{C}, \text{I}_s=-3.6\text{A}, \text{V}_{\text{GS}}=0\text{V}$ |
| t_{rr} | Reverse Recovery Time | -- | 100 | -- | ns | $\text{T}_J=25^\circ\text{C}, \text{I}_F=-3.6\text{A}$ $d\text{I}_F/dt=100\text{A}/\mu\text{s}$ ④ |
| Q_{rr} | Reverse Recovery Charge | -- | 0.35 | -- | | |

Notes :

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- ② $L=6.0\text{mH}, \text{I}_{\text{AS}}=-3.6\text{A}, \text{V}_{\text{DD}}=-25\text{V}, \text{R}_G=27\Omega^*$, Starting $\text{T}_J=25^\circ\text{C}$
- ③ $\text{I}_{\text{SD}} \leq -3.6\text{A}, d\text{I}/dt \leq 300\text{A}/\mu\text{s}, \text{V}_{\text{DD}} \leq \text{BV}_{\text{DSS}}$, Starting $\text{T}_J=25^\circ\text{C}$
- ④ Pulse Test : Pulse Width = $250\mu\text{s}$, Duty Cycle $\leq 2\%$
- ⑤ Essentially Independent of Operating Temperature

**P-CHANNEL
POWER MOSFET**

SFP9510

Fig 1. Output Characteristics

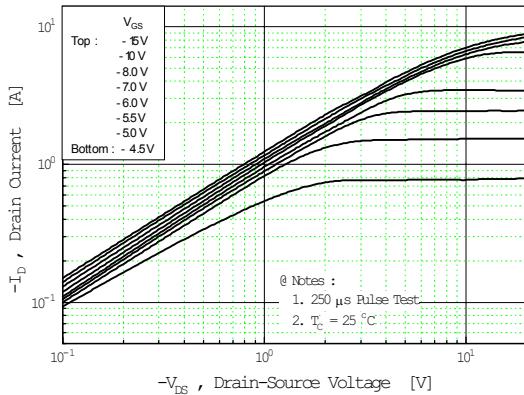


Fig 2. Transfer Characteristics

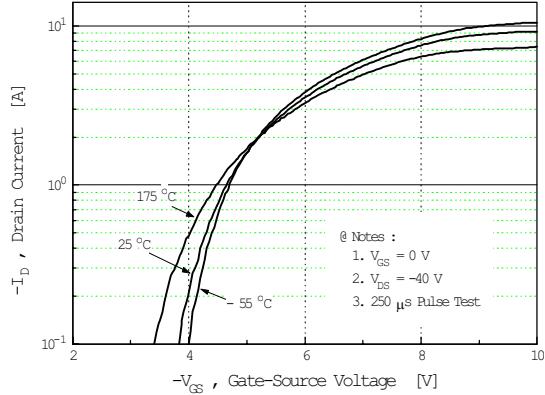


Fig 3. On-Resistance vs. Drain Current

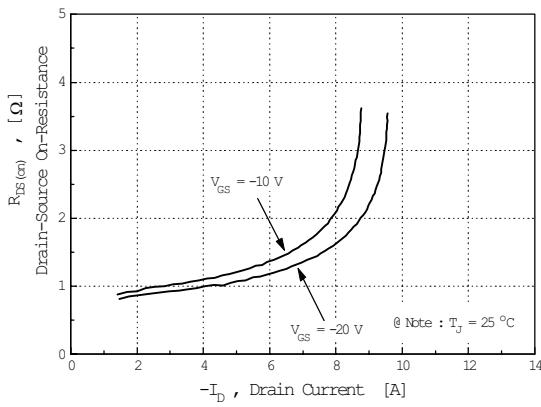


Fig 4. Source-Drain Diode Forward Voltage

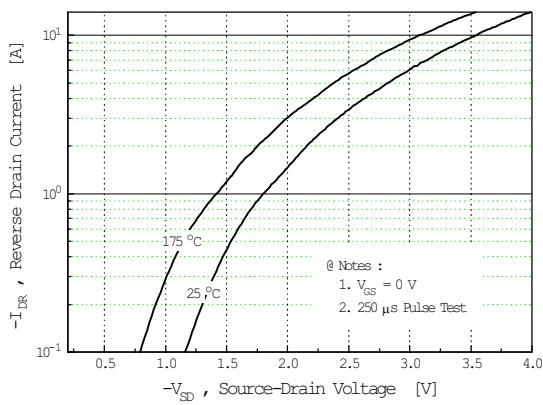


Fig 5. Capacitance vs. Drain-Source Voltage


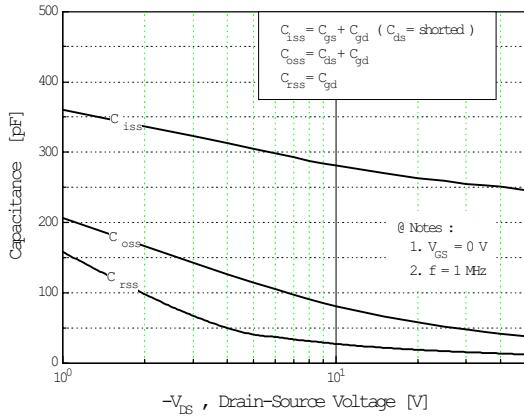


Fig 6. Gate Charge vs. Gate-Source Voltage

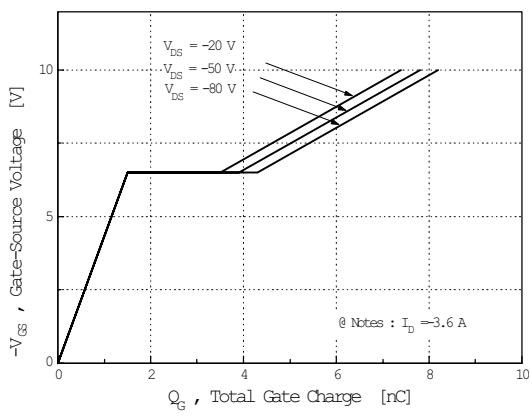

SFP9510

P-CHANNEL
POWER MOSFET

Fig 7. Breakdown Voltage vs. Temperature

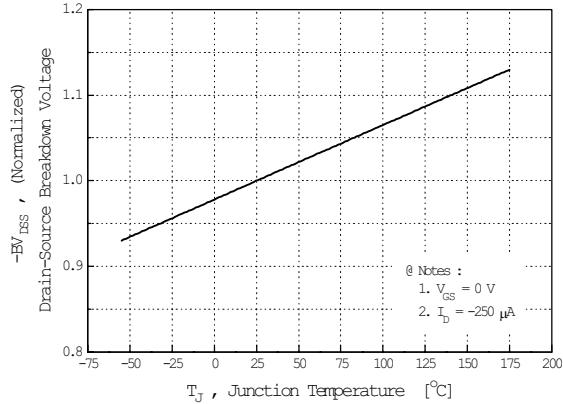


Fig 8. On-Resistance vs. Temperature

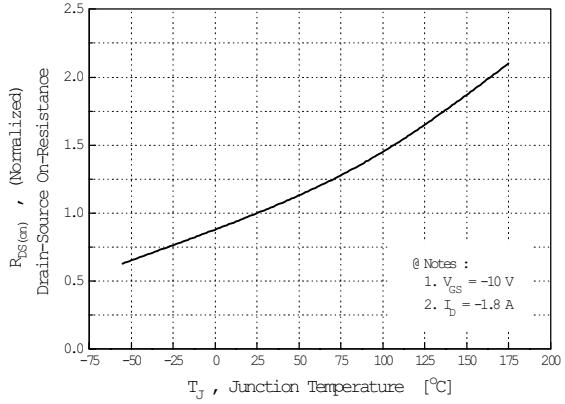


Fig 9. Max. Safe Operating Area

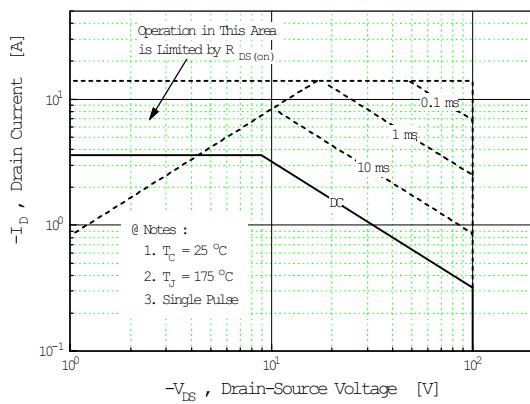


Fig 10. Max. Drain Current vs. Case Temperature

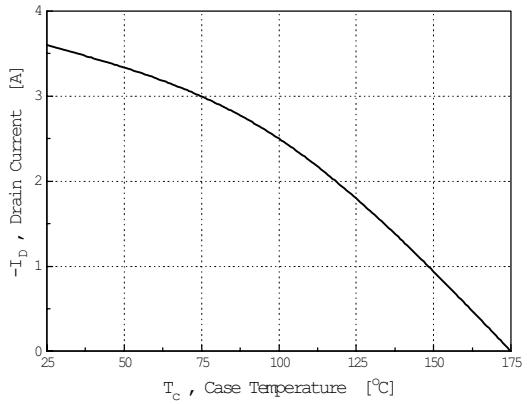


Fig 11. Thermal Response

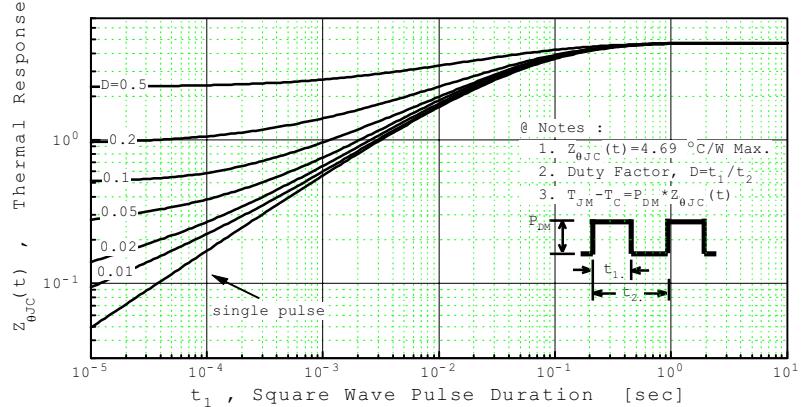


Fig 12. Gate Charge Test Circuit & Waveform

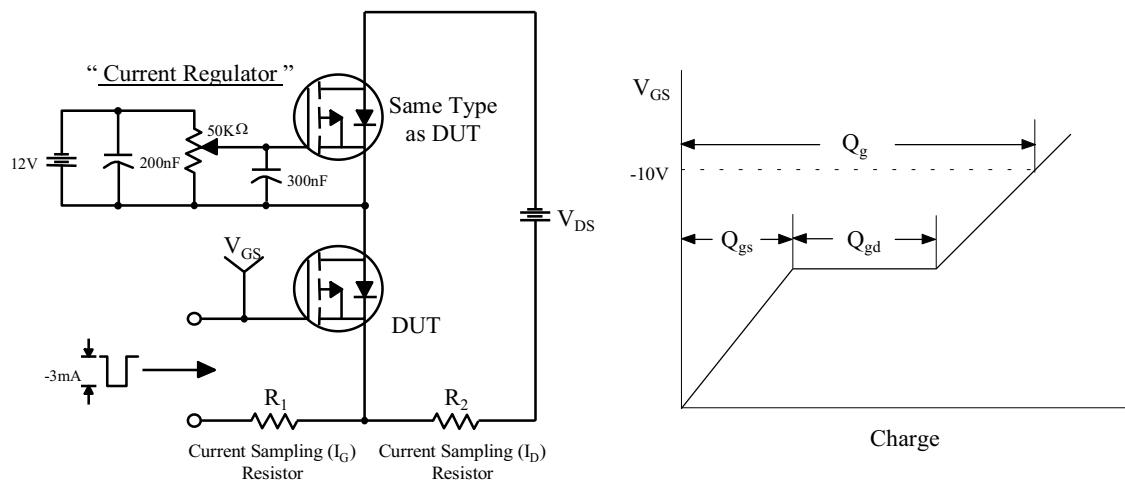


Fig 13. Resistive Switching Test Circuit & Waveforms


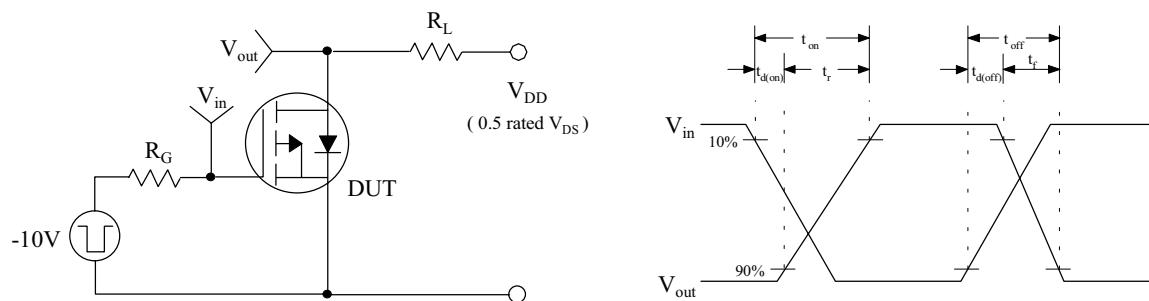


Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms

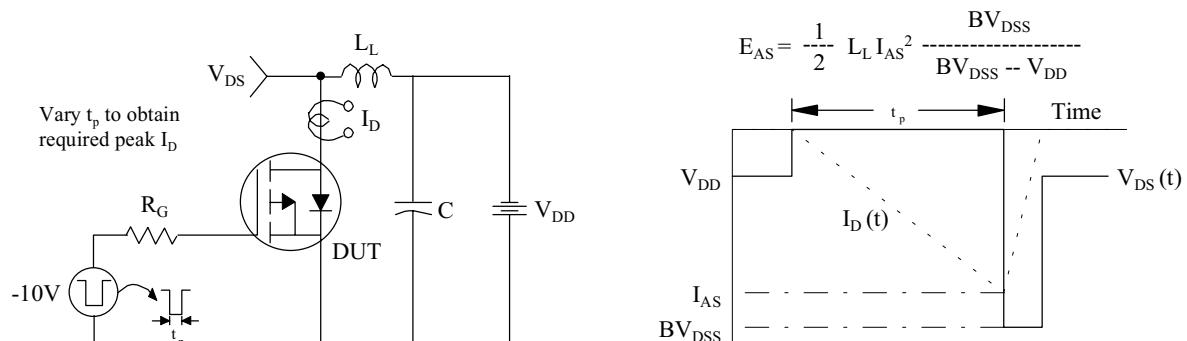

SFP9510

P-CHANNEL
POWER MOSFET

Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

