



PLESSEY
SEMICONDUCTORS

SP 8000 SERIES

HIGH SPEED DIVIDERS

SP 8640A, B & M 200 MHz

SP 8641A, B & M 250 MHz

SP 8642A, B & M 300 MHz

SP 8643A, B & M 350 MHz

SP 8646A, B & M 200 MHz TTL OUTPUTS

SP 8647 A, B & M 250 MHz TTL OUTPUTS

UHF PROGRAMMABLE DIVIDERS $\div 10/11$

In frequency synthesis it is desirable to start programmable division at as high a frequency as possible, because this raises the comparison frequency and so improves the overall synthesiser performance.

The SP8640 series are UHF integrated circuits that can be logically programmed to divide by either 10 or 11, with input frequencies up to 350 MHz. The design of very fast fully programmable dividers is therefore greatly simplified by the use of these devices and makes them particularly useful in frequency synthesisers operating in the UHF band.

Inputs and outputs are ECL compatible throughout the

temperature range: the clock inputs and programming inputs are ECL III compatible while the two complementary outputs are ECL II compatible to reduce power consumption in the output stage. ECL 10K output compatibility can be achieved very simply however (see Operating Notes). The SP8646/7 feature an additional TTL compatible output.

The division ratio is controlled by two $\overline{PE}$ inputs. The counter will divide by 10 when either $\overline{PE}$ input is in the high state and by 11 when both inputs are in the low state. Both the $\overline{PE}$ inputs and the clock inputs have nominal 4.3k Ω pulldown resistors to V_{EE} (negative rail).

FEATURES

- Military and Industrial Variants.
- 350 MHz Toggle Frequency
- Low Power Consumption
- ECL Compatibility on All I/Ps & O/Ps
- Low Propagation Delay
- True and Inverse Outputs
- Optional TTL Output

QUICK REFERENCE DATA

- Full Temperature Range Operation:
 - 'A' Grade -55°C to $+125^{\circ}\text{C}$
 - 'B' Grade 0°C to $+70^{\circ}\text{C}$
 - 'M' Grade -40°C to $+85^{\circ}\text{C}$
- Supply Voltage
 - $|V_{CC} - V_{EE}| 5.2\text{V}$
- Power Consumption 250mW Typ.
- Propagation Delay 3ns Typ.

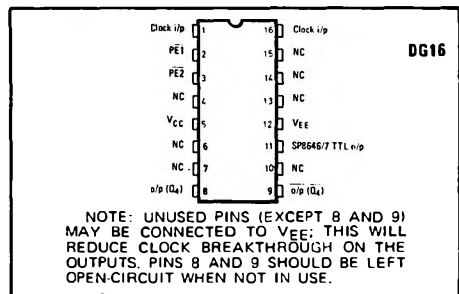


Fig. 1 Pin connections (top)

ABSOLUTE MAXIMUM RATINGS

Supply voltage $ V_{CC} - V_{EE} $	8V
Input voltage V_{in} (d.c.)	Not greater than the supply voltage in use.
Output current I_{out}	20mA
Max. junction temperature	$+150^{\circ}\text{C}$
Storage temperature range	-55°C to $+175^{\circ}\text{C}$

Clock Pulse	Q ₁	Q ₂	Q ₃	Q ₄	TTL O/P
1	L	H	H	H	H
2	L	L	H	H	H
3	L	L	L	H	H
4	H	L	L	H	H
5	H	H	L	H	H
6	L	H	H	L	L
7	L	L	H	L	L
8	L	L	L	L	L
9	H	L	L	L	L
10	H	H	L	L	L
11	H	H	H	H	L

Table 1 Count sequence

Extra state

PE ₁	PE ₂	Div Ratio
L	L	11
H	L	10
L	H	10
H	H	10

Table 2 Truth table for control inputs

The maximum possible loop delay for control is obtained if the L→H transition from Q₄ or the H→L transition from Q₄ is used to clock the stage controlling the ÷10/11. The loop delay is 10 clock periods minus the internal delays of the ÷10/11 circuit.

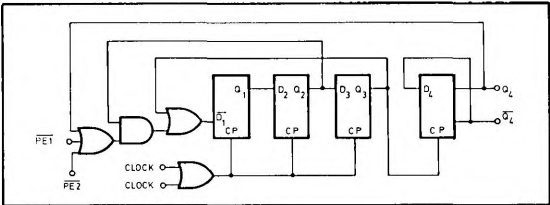


Fig. 2 Logic diagram (positive logic)

ELECTRICAL CHARACTERISTICS

Test conditions (unless otherwise stated):

- T_{amb}: -55 C to -125 C (A grade)
- 40 C to -85 C (M grade)
- 0 C to -70 C (B grade)
- Supply voltage (see note 1): V_{CC} 0V
- V_{EE} -5.2V

Static Characteristics (all SP8640 series devices)

Characteristic	Value			Units	Conditions
	Min.	Typ.	Max.		
Clock and PE input voltage levels					
V _{INH}	-1.10		-0.81	V	T _{amb} = +25°C, see Note 2
V _{INL}	-1.85		-1.50	V	
Input pulldown resistance, between pins 1, 2, 3, and 16 and V _{EE} (pin 12)		4.3		KΩ	
Output voltage levels					
V _{OH}	-0.85			V	T _{amb} = +25°C, see Note 3. I _{OUT} (external) = 0mA (There is an internal circuit equivalent to a 2kΩ pulldown resistor on each output)
V _{OL}			-1.50	V	
Power supply drain current		50	65	mA	

NOTES

- The devices are specified for operation with the power supplies of V_{CC} = 0V and V_{EE} = -5.2V ± 0.25V, which are the normal ECL supply rails. They will also operate satisfactorily with TTL rails of V_{CC} = +5V ± 0.25V and V_{EE} = 0V.
- The input reference voltage has the same temperature coefficient as ECL III and ECL 10K.
- The output voltage levels have the same temperature coefficients as ECL II output levels.

OPERATING NOTES

The SP8640 range of devices are designed to operate in the UHF band and therefore PCB layouts should comply with normal UHF rules, e.g. non-inductive resistors and capacitors should be used, power supply rails decoupled, etc.

All clock and control inputs are compatible with ECL III and ECL 10K throughout the temperature range. However, it is often desirable to capacitively-couple the signal source to the clock, in which case an external bias network is required as shown in Fig. 6.

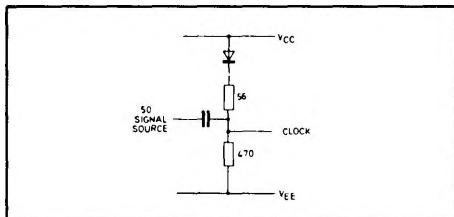


Fig. 6 Recommended input bias configuration for capacitive coupling to a continuous 50Ω signal source.

The $\div 10/11$ can be controlled by a TTL fully programmable counter, provided that delays within the loop are kept to a minimum. The outputs and control inputs must therefore interface to TTL. The input TTL to ECL interface is accomplished with two resistors as shown in Fig. 7. The output ECL to TTL interface has been provided on chip in the SP8646/7. A discrete interface may be constructed as shown in Fig. 7. Both output interfaces will operate satisfactorily over the full military temperature range (-55°C to $+125^{\circ}\text{C}$). The propagation delay through the divider plus the interface and one Schottky TTL gate is approximately 10 ns. At an input frequency of 350 MHz this would only leave about 16 ns for the fully-programmable counter to control the $\div 10/11$. The loop delay can be increased by extending the $\div 10/11$ function to, say, $\div 20/21$ or $\div 40/41$ (see Application Notes).

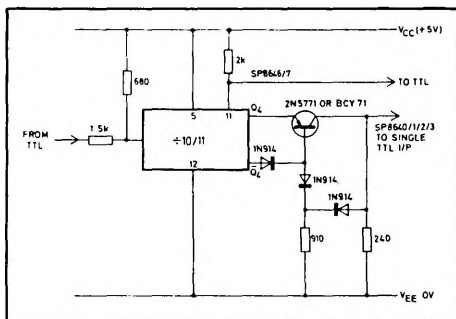


Fig. 7 TTL to ECL and ECL/TTL interfaces (for SP8640 devices and TTL operating from the same supply rails)

The SP8640 device ECL o/p's are compatible with ECL II levels when there is no external load. They can be made compatible with ECL III and ECL 10K with a simple potential dividing network as shown in Fig. 8.

The control and clock inputs are already compatible with ECL III and ECL 10K. The interface circuit of Fig. 8 can be used to increase noise immunity when interfacing from ECL III and ECL 10K outputs at low current levels to ECL III and ECL 10K inputs.

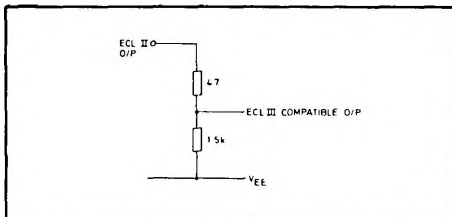


Fig. 8 ECL II to ECL III interface