


**STK-040,
041, 043**

thick film hybrid IC

10, 15, 20W min AF POWER AMP.



These are scheduled to be discontinued in the near future.

Features

- © IMST, 2 Channel by 2 Power Supply.
- AF Output Power STK-040: 10 W min.
STK-041: 15 W min.
STK-043: 20 W min.
- STK-043-105 are for the use of $T_C=150^\circ\text{C}$.

MAXIMUM RATINGS / $T_a=25^\circ\text{C}$

		STK-040	STK-041	STK-043	unit
Maximum Supply Voltage	V_{CC} max	± 25	± 29	± 32.5	V
Operating Case Temperature	T_C	\rightarrow	90	\leftarrow	$^\circ\text{C}$
Storage Temperature	T_{stg}	\rightarrow	-30 to +100	\leftarrow	$^\circ\text{C}$
Allowable Load Shorting Time	t_S recommended operation condition, rated power output $f=50\text{Hz}$	\rightarrow	2	\leftarrow	sec


RECOMMENDED OPERATION CONDITION / $T_a=25^\circ\text{C}$

		STK-040	STK-041	STK-043	unit
Recommended Supply Voltage	V_{CC}	± 16.5	± 20	± 22	V
Load Resistance	R_L	\rightarrow	8	\leftarrow	ohm

OPERATION CHARACTERISTICS / $T_a=25^\circ\text{C}$, recommended V_{CC} supplied, $R_L=8\text{ ohm}$, $R_g=600\text{ ohm}$
 $VG=41.5\text{ dB (STK-040), } 38.5\text{ dB (STK-041, 043)}$

		STK-040	STK-041	STK-043	unit
Quiescent Current	I_{CC}	\rightarrow	120	\leftarrow	mA max
Output Power	P_O	THD=0.9 %, $f=1\text{ kHz}$	10	—	W min
		THD=0.5 %, $f=20\text{ to }20\text{ kHz}$	—	15	W min
		THD=0.5 %, $f=1\text{ kHz}$	—	—	W min
Distortion	THD	$P_o=1\text{ W}, f=1\text{ kHz}$	\rightarrow	0.2	% max
Frequency Response	—	$P_o=0.1\text{ W}, -3\text{ dB}$	\rightarrow	20 to 50k	Hz
Input Resistance	r_i	$P_o=0.1\text{ W}$	\rightarrow	32k	ohm

EQUIVALENT CIRCUIT

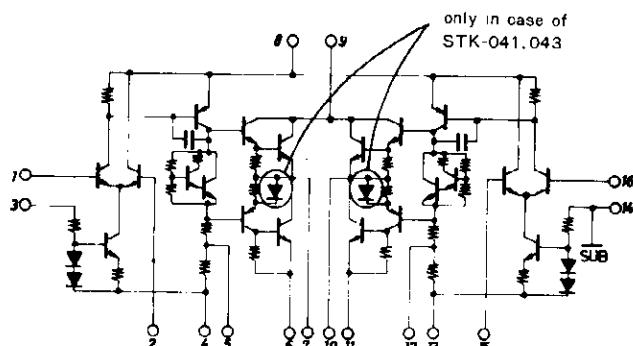

APPLICATION: 10, 15, 20W min 2 Channel AF Power Amp.

