


**MECHANICAL CASE OUTLINE**  
**PACKAGE DIMENSIONS**

**DPAK (Single Gauge) / ATPAK**  
**CASE 369AM**  
**ISSUE 0**

DATE 29 FEB 2012

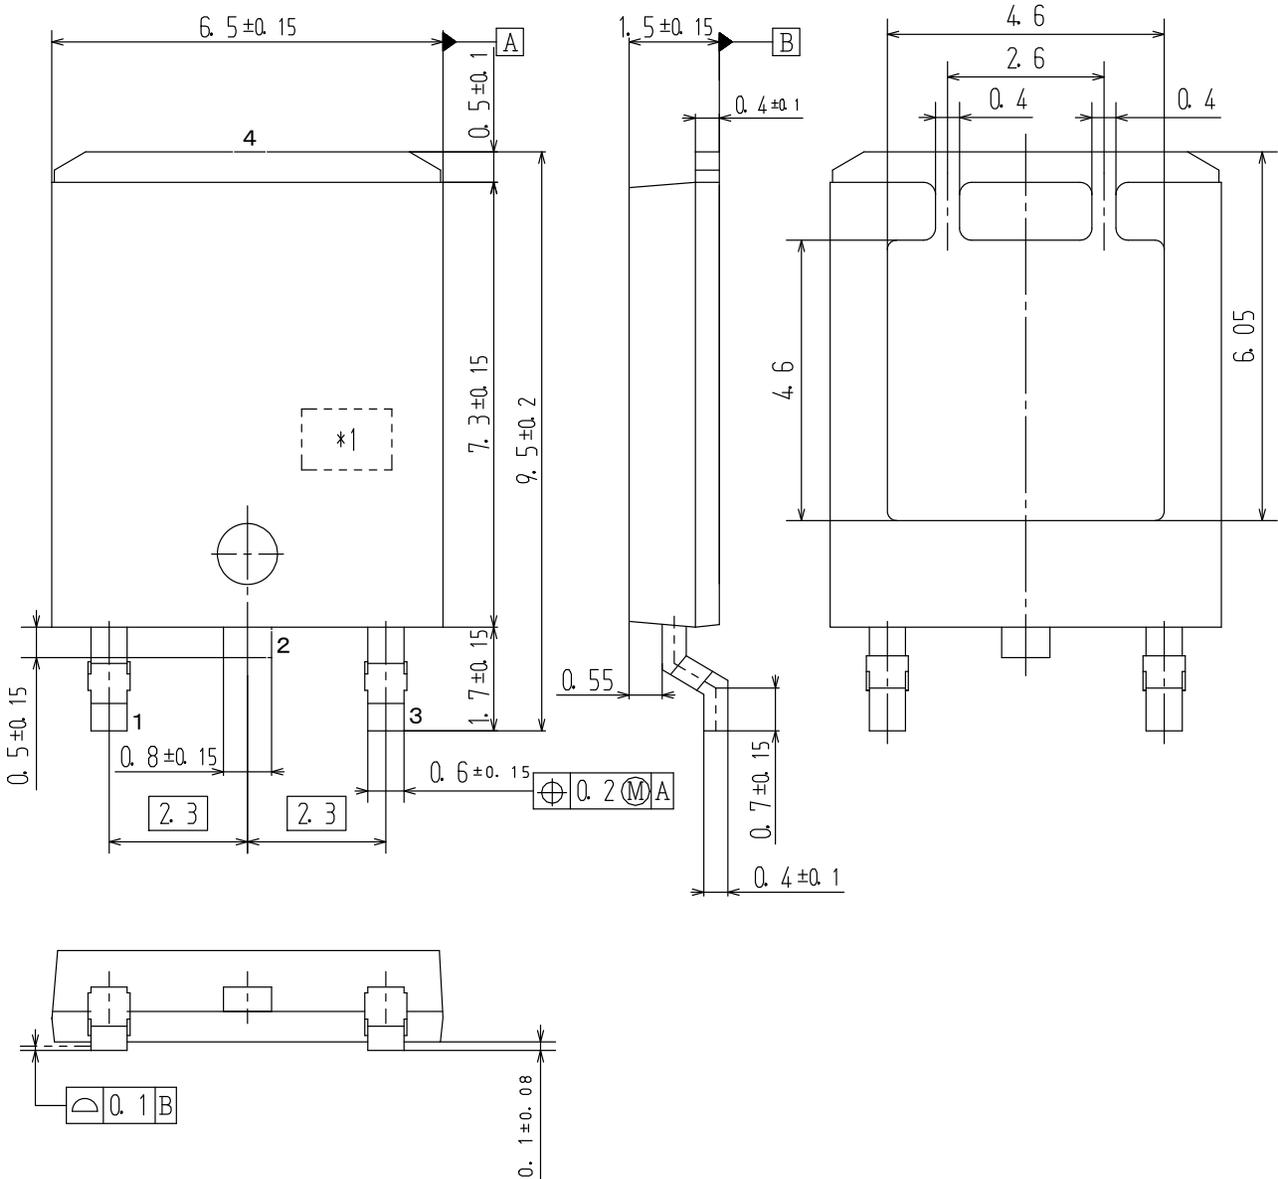

Pin2 is idle pin with electrical designation only carried

|                         |                                    |  |
|-------------------------|------------------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98AON67243E</b>                 | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>STATUS:</b>          | <b>ON SEMICONDUCTOR STANDARD</b>   |  |
| <b>NEW STANDARD:</b>    |                                    |  |
| <b>DESCRIPTION:</b>     | <b>DPAK (SINGLE GAUGE) / ATPAK</b> | <b>PAGE 1 OF 2</b>   |

