



ISOLATED PLASTIC

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	11.80	12.20	0.465	0.480
B	8.90	9.10	0.350	0.358
C	1.95	2.05	0.077	0.081
D	0.75	0.85	0.029	0.034
E	12.60	12.80	0.496	0.504
F	25.10	25.50	0.988	1.004
G	31.50	31.70	1.240	1.248
H	4.00		0.157	
I	4.10	4.30	0.161	0.169
J	4.10	4.30	0.161	0.169
K	14.90	15.10	0.586	0.595
L	30.10	30.30	1.185	1.193
M	37.80	38.20	1.488	1.504
O	7.80	8.20	0.307	0.323
P	5.50		0.216	

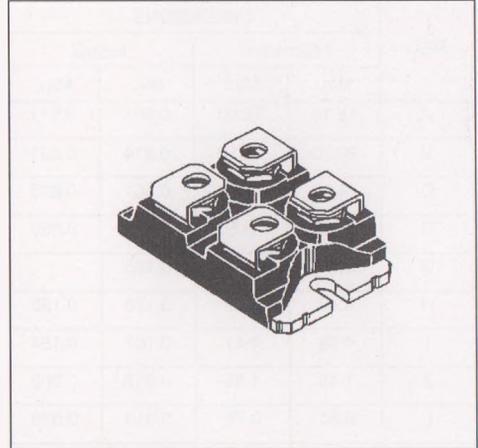

Weight = 28 g (without screws)
 Marking : Type number
 Cooling method : C
 Electrical isolation : 2500V_(RMS)
 Capacitance : < 45 pF
 Inductance : < 5 nH

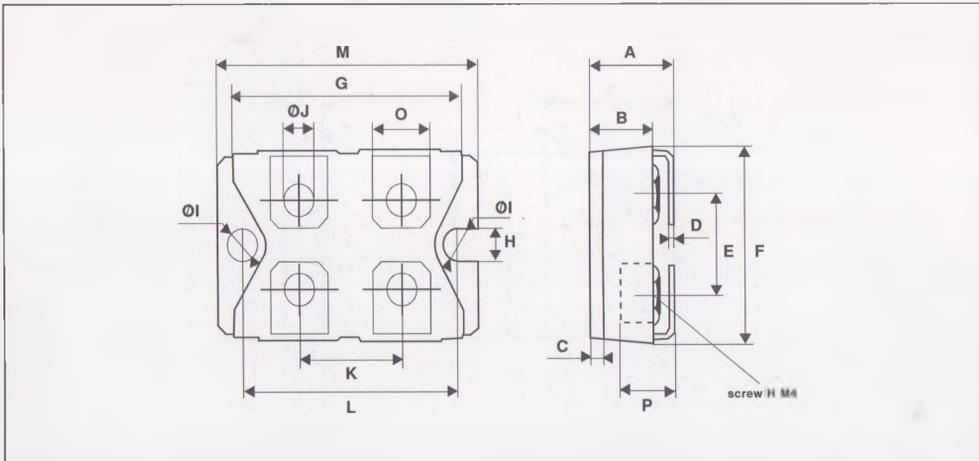

- Recommended torque value : 1.3 N.m (MAX 1.5 N.m) for the 6 x M4 screws. (2 x M4 screws recommended for mounting the package on the heatsink and the 4 screws given with the screw version).
- The screws supplied with the package are adapted for mounting on a board (or other types of terminals) with a thickness of 0.6 mm min and 2.2 mm max.