




NMP (Taping)
CASE 135AD
ISSUE B

DATE 14 JUL 2015

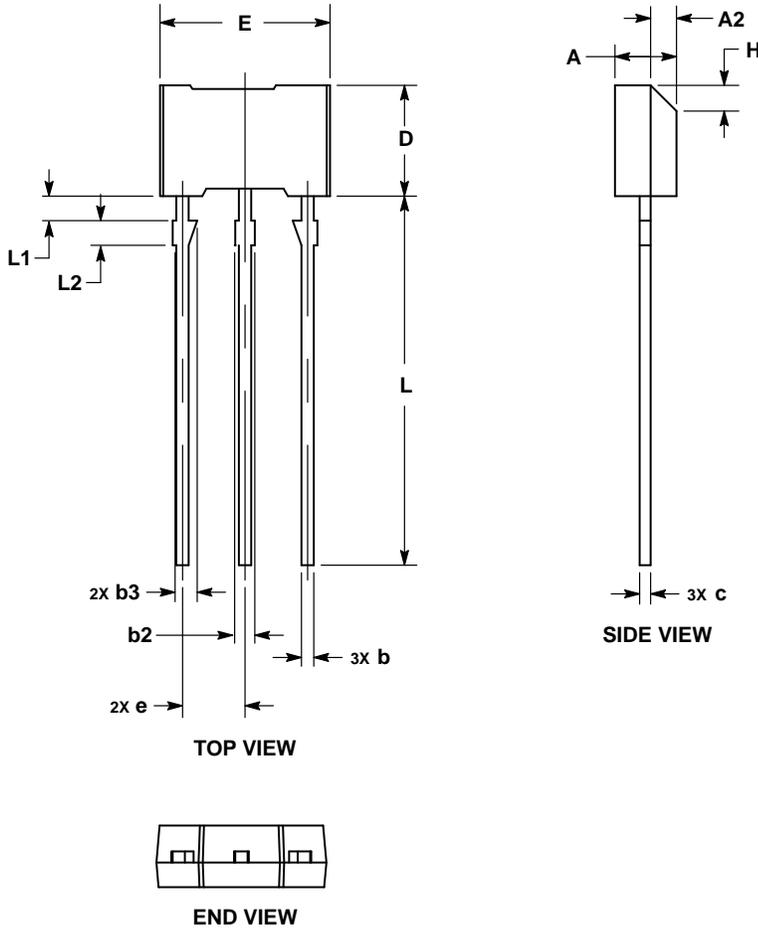

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE.
4. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.

DIM	MILLIMETERS	
	MIN	MAX
A	2.30	2.70
A2	0.85	1.25
b	0.40	0.60
b2	0.50	0.70
b3	0.75	1.05
c	0.35	0.55
D	4.30	4.70
E	6.70	7.10
e	2.44	2.64
H	0.80	1.20
L	14.50	15.50
L1	0.80	1.20
L2	0.80	1.20

DOCUMENT NUMBER:	98AON78697E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
STATUS:	ON SEMICONDUCTOR STANDARD	
NEW STANDARD:		
DESCRIPTION:	NMP (TAPING)	PAGE 1 OF 2

