








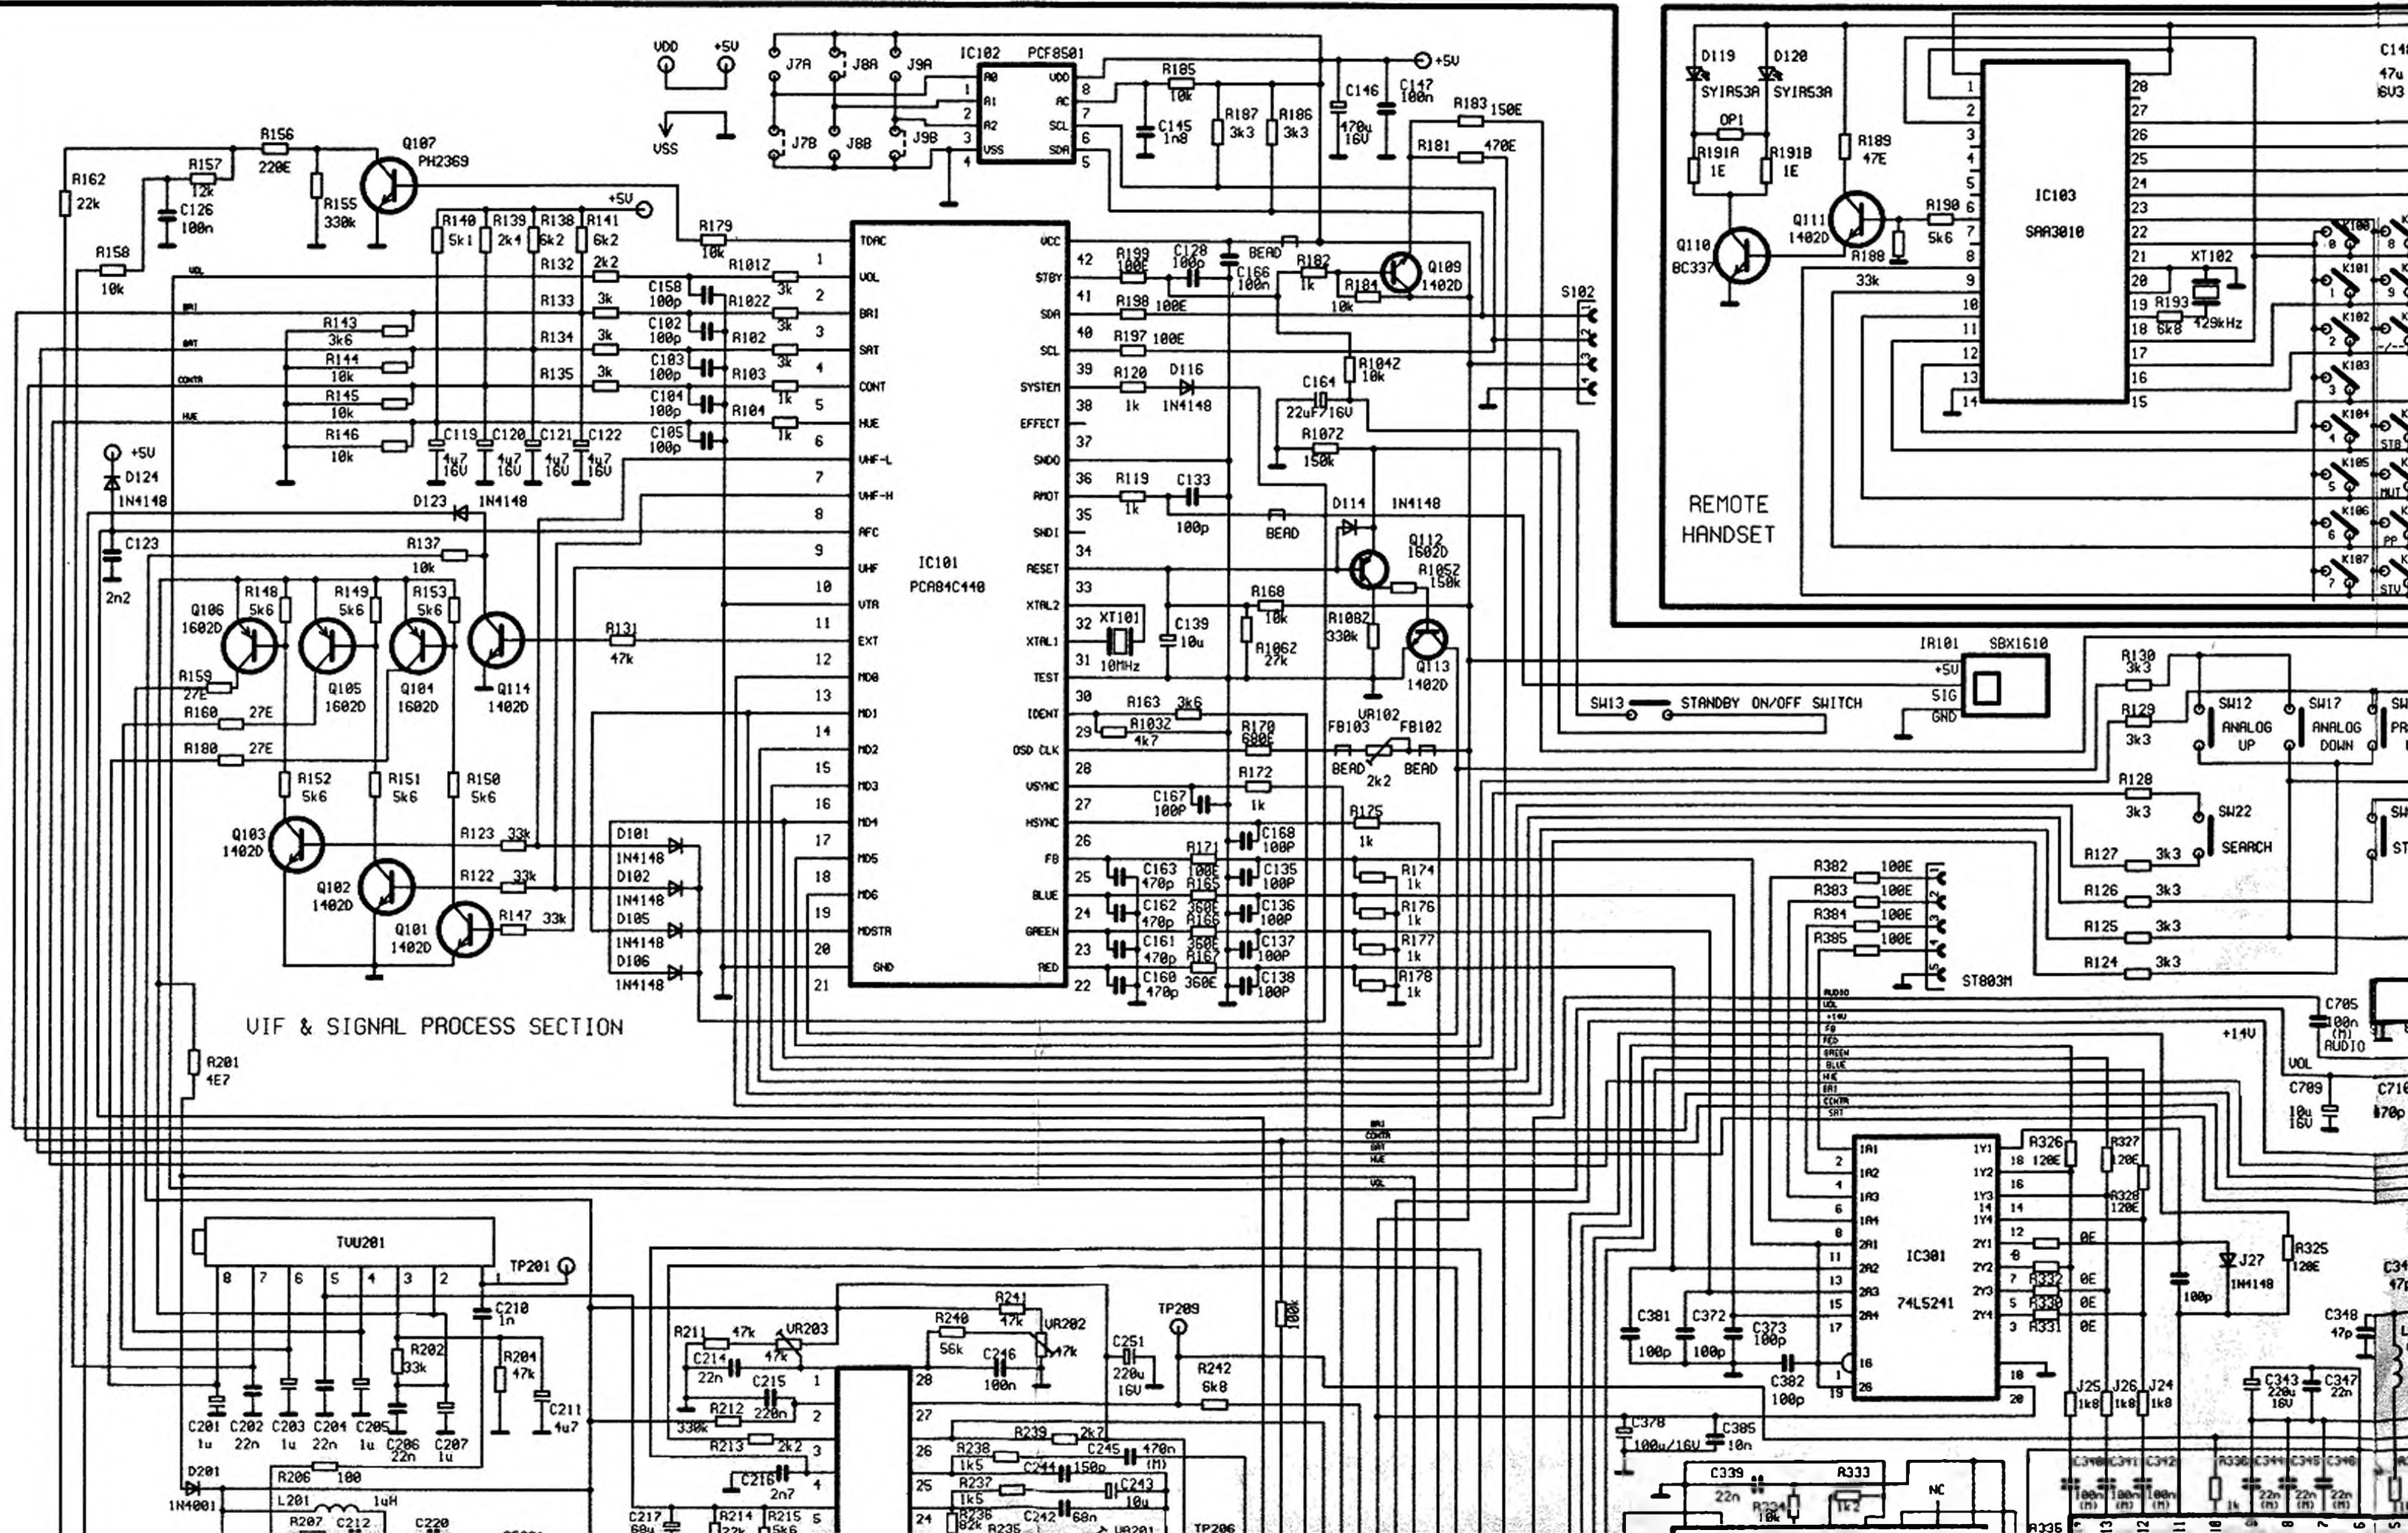


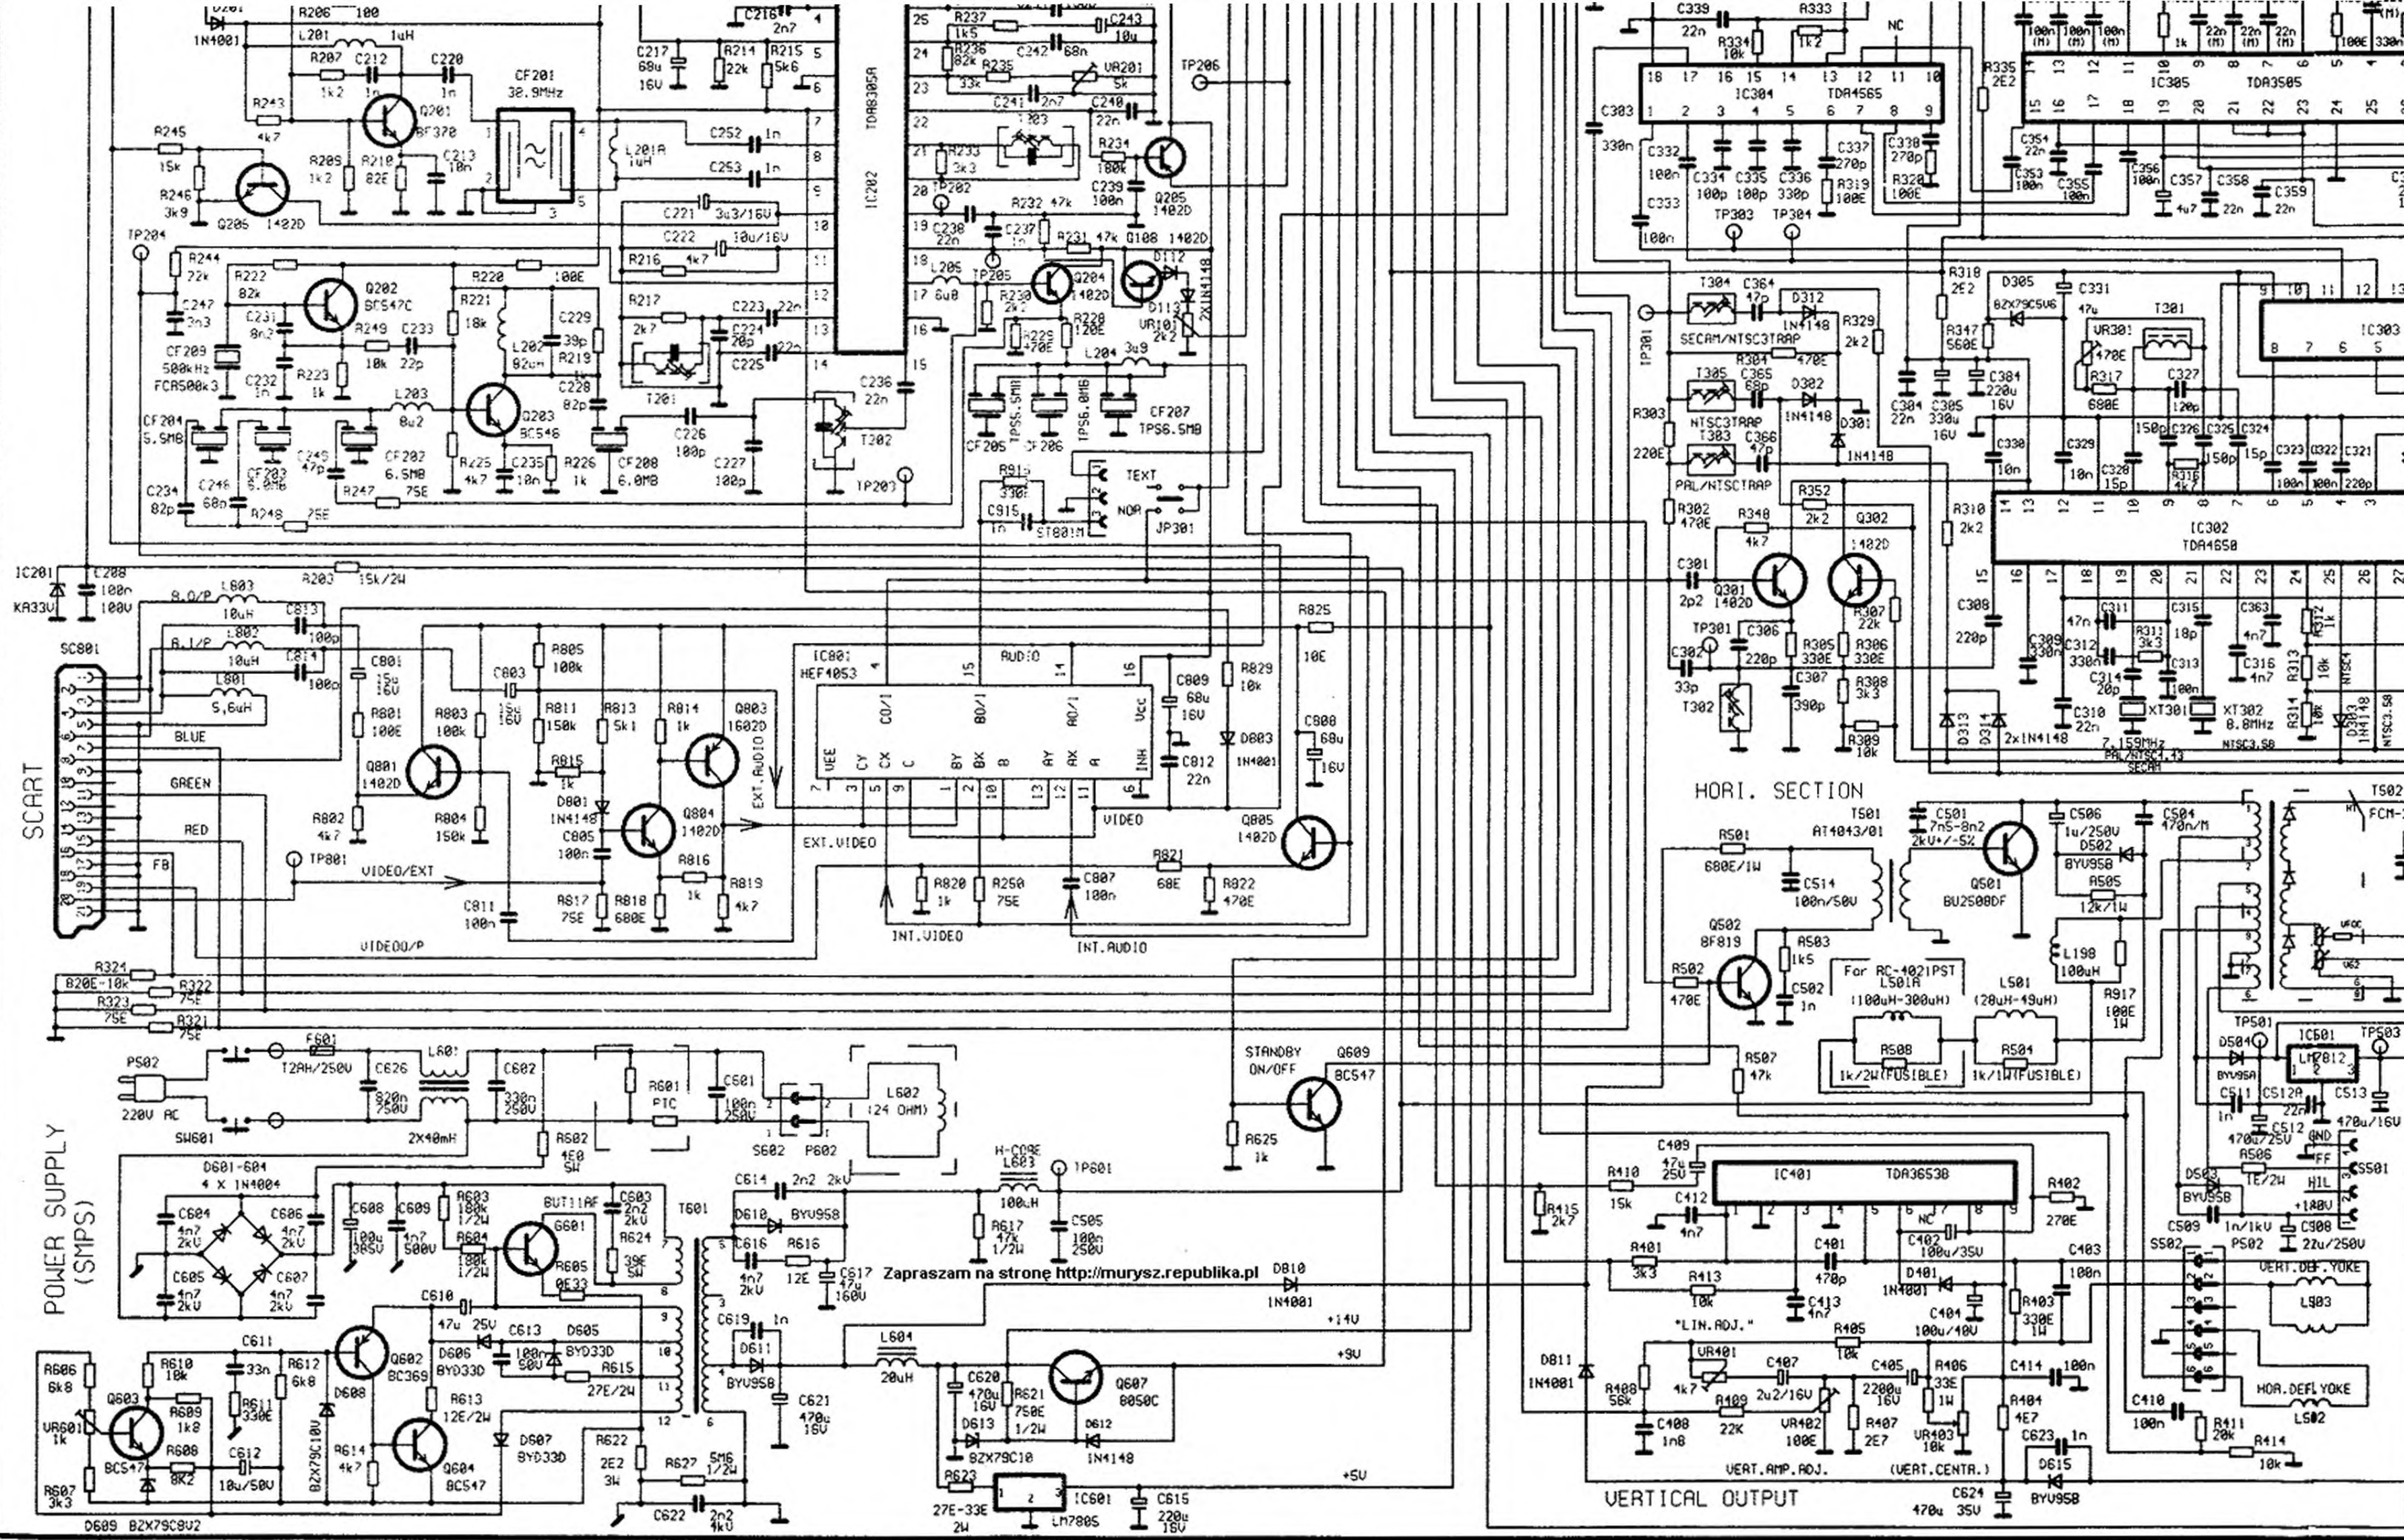

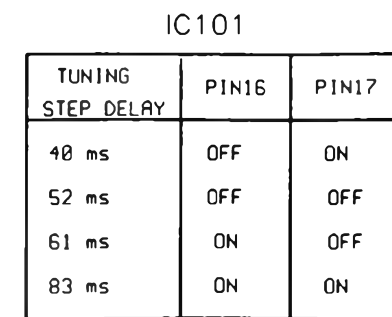

AXXION  
SCHEMAT IDEOWY OTVC 20", 21"  
RC4020, RC4120, RC4021



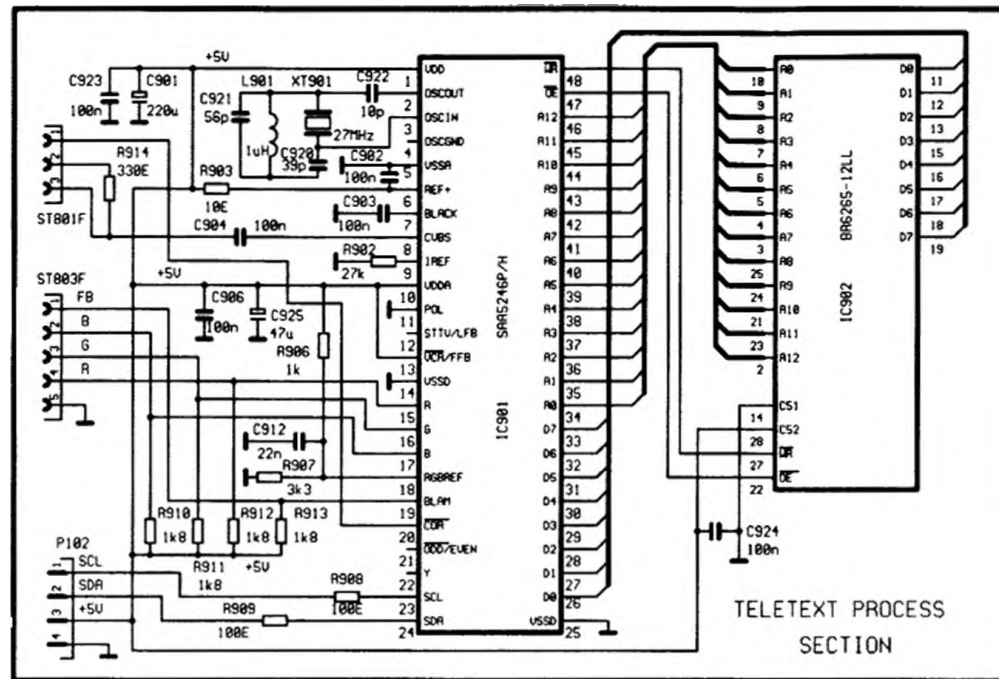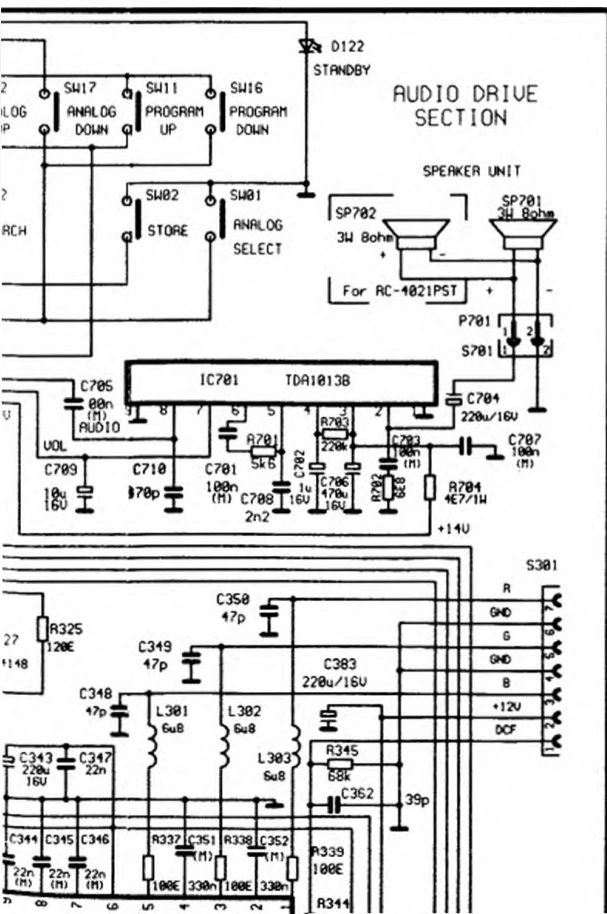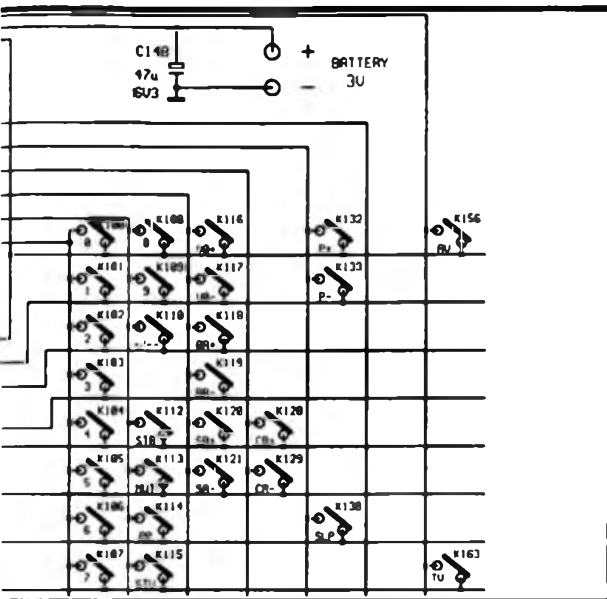

REMARK:

CONTROL RANGE TABLE

|       | MIN. | MAX. | CENTER |
|-------|------|------|--------|
| CONT. | 2.8U | 4.0U |        |
| BRI.  | 0.9U | 2.4U |        |
| SAT   | 2.1U | 3.3U |        |
| HUE   | 1.5U | 3.9U | 2.8U   |

|         | A0 | A1 | A2 |
|---------|----|----|----|
| PCF8581 | 7b | 8a | 9b |
| PCF8582 | 7a | 8b | 9b |

SCHEMATIC NOTES:

- RESISTANCE IS SHOWN IN OHMS k=1.000 M=1.000.000
- CAPACITANCE IS SHOWN IN u=uF n=nF p=pF  
T TANTALUM CAPACITOR  
M FILM CAPACITOR
- STANDARD FILM RESISTOR (SFR25)
- VOLTAGE READ WITH DIGITAL VOLT-METER FROM POINT INDICATED TO CHASSIS GROUND USING A NORMAL PICTURE
- VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY +/- 20% (EXCEPT H.U.)
- SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE

