




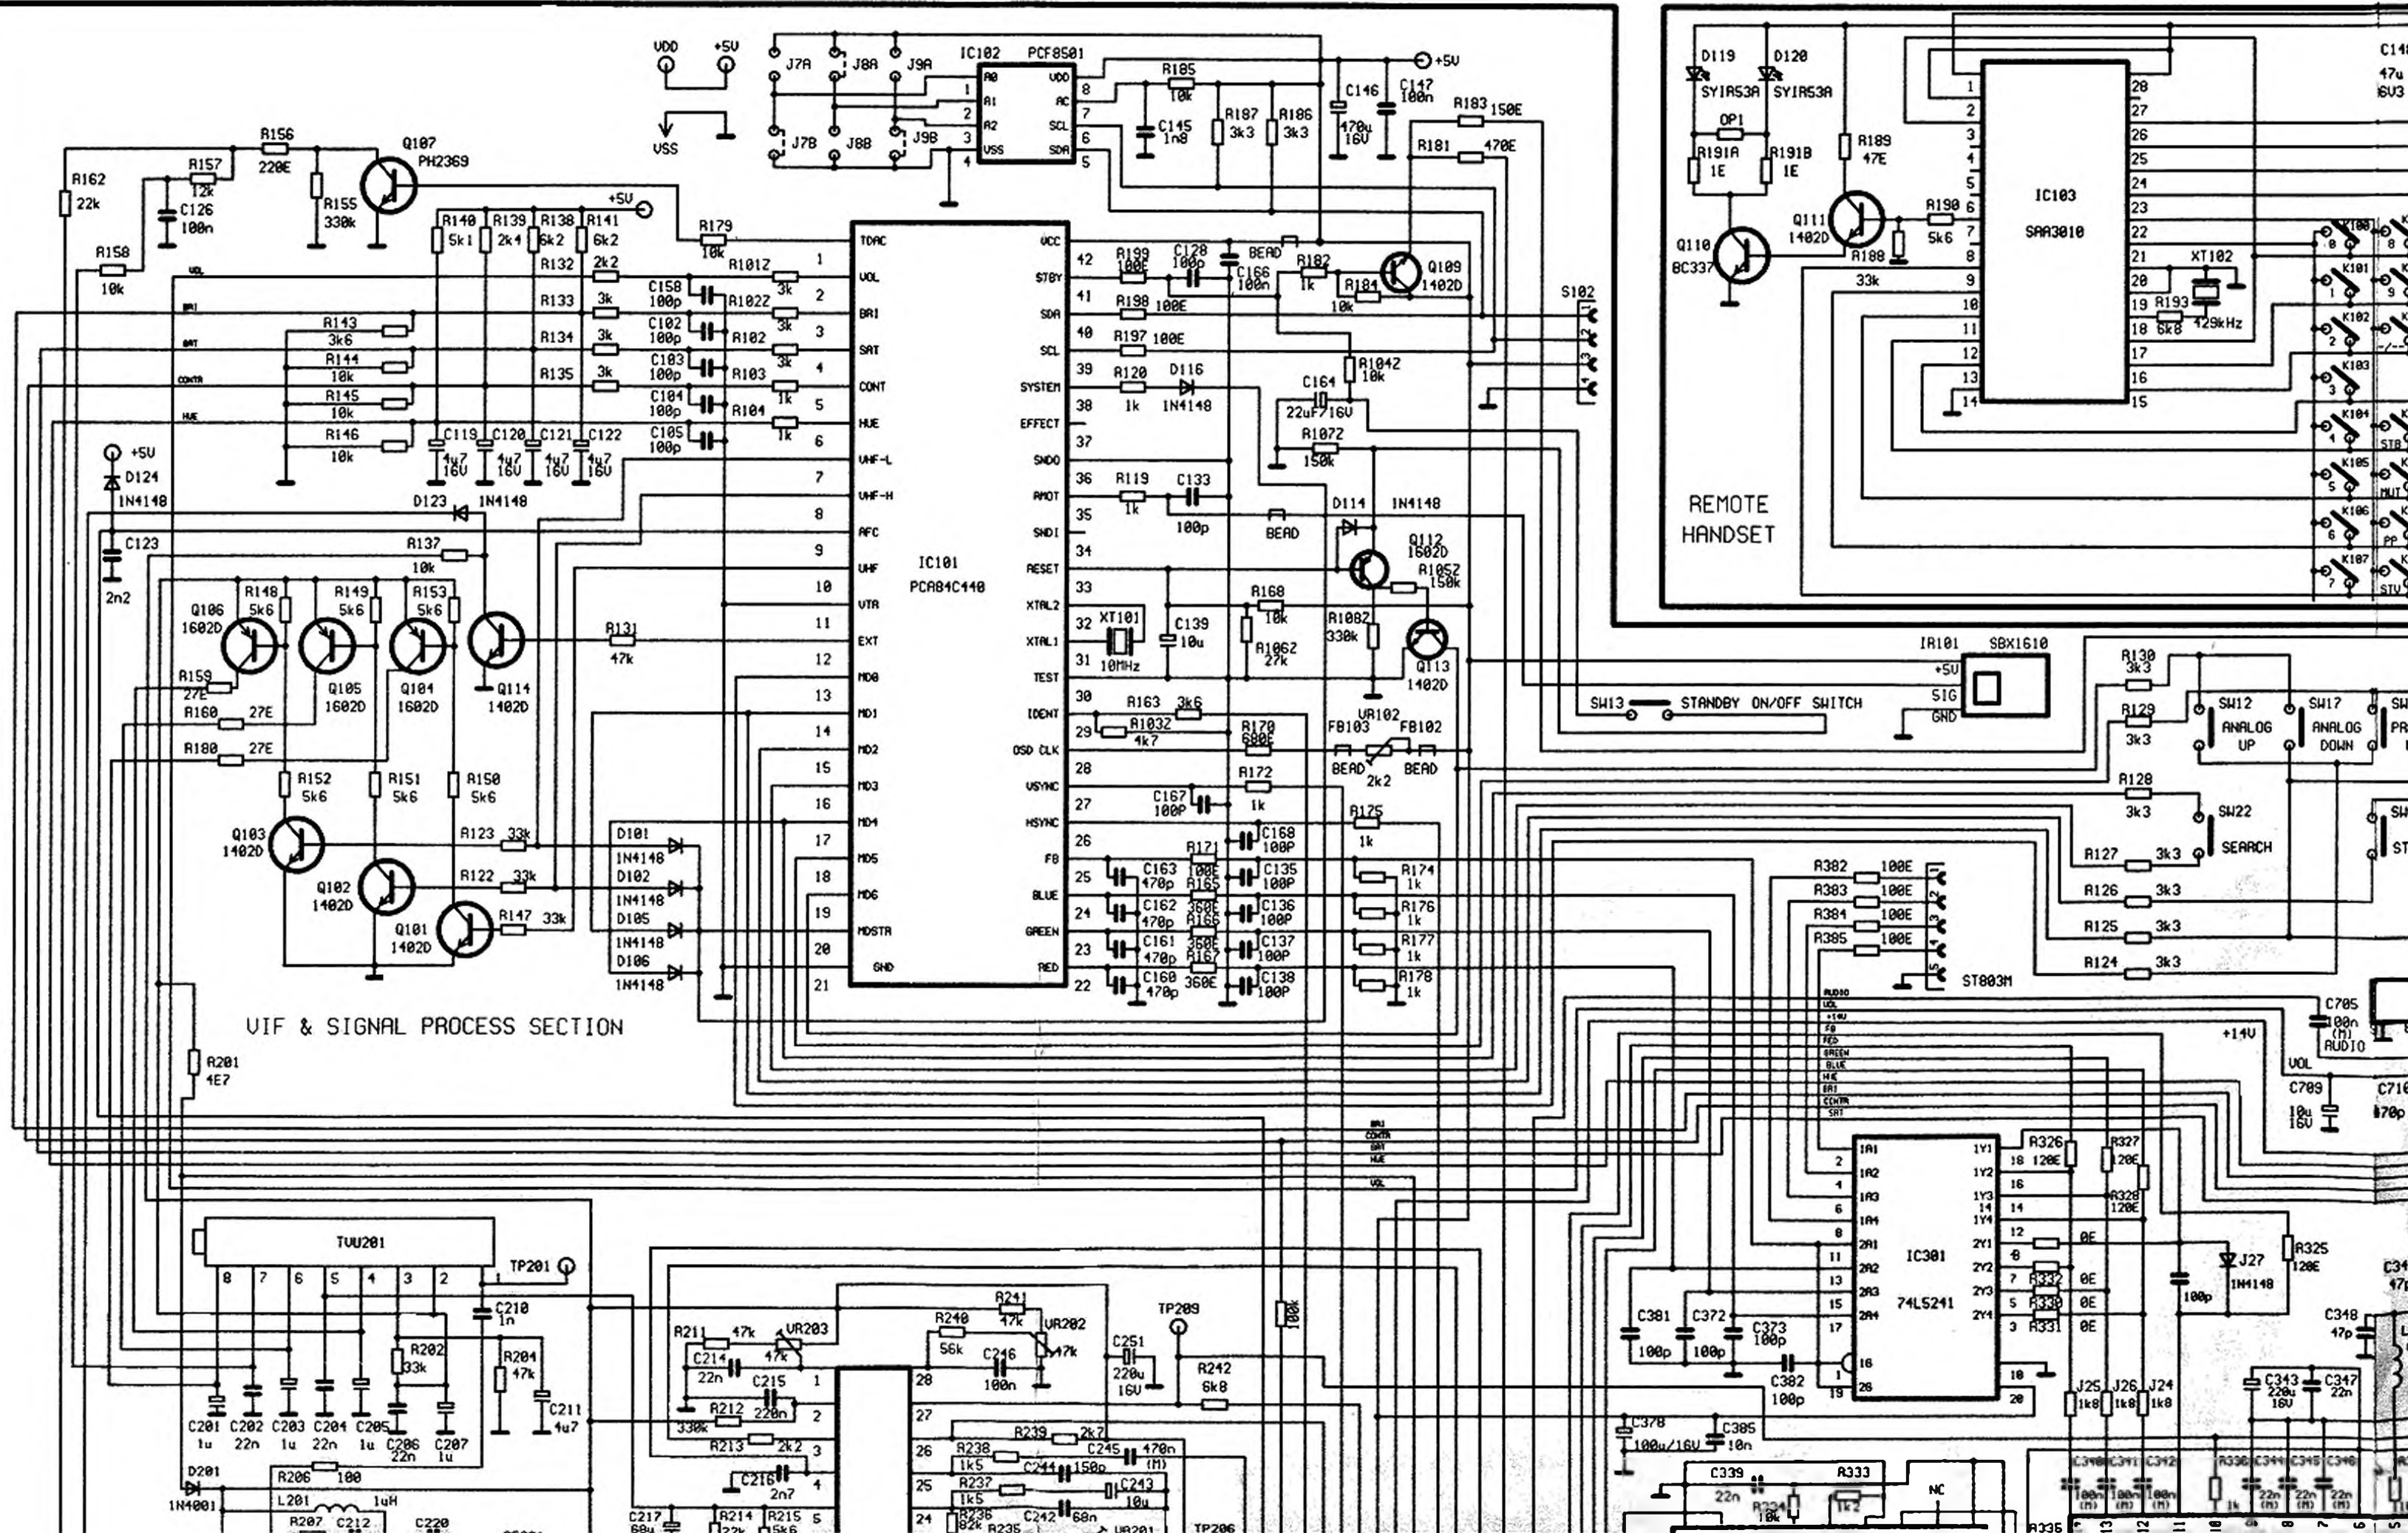




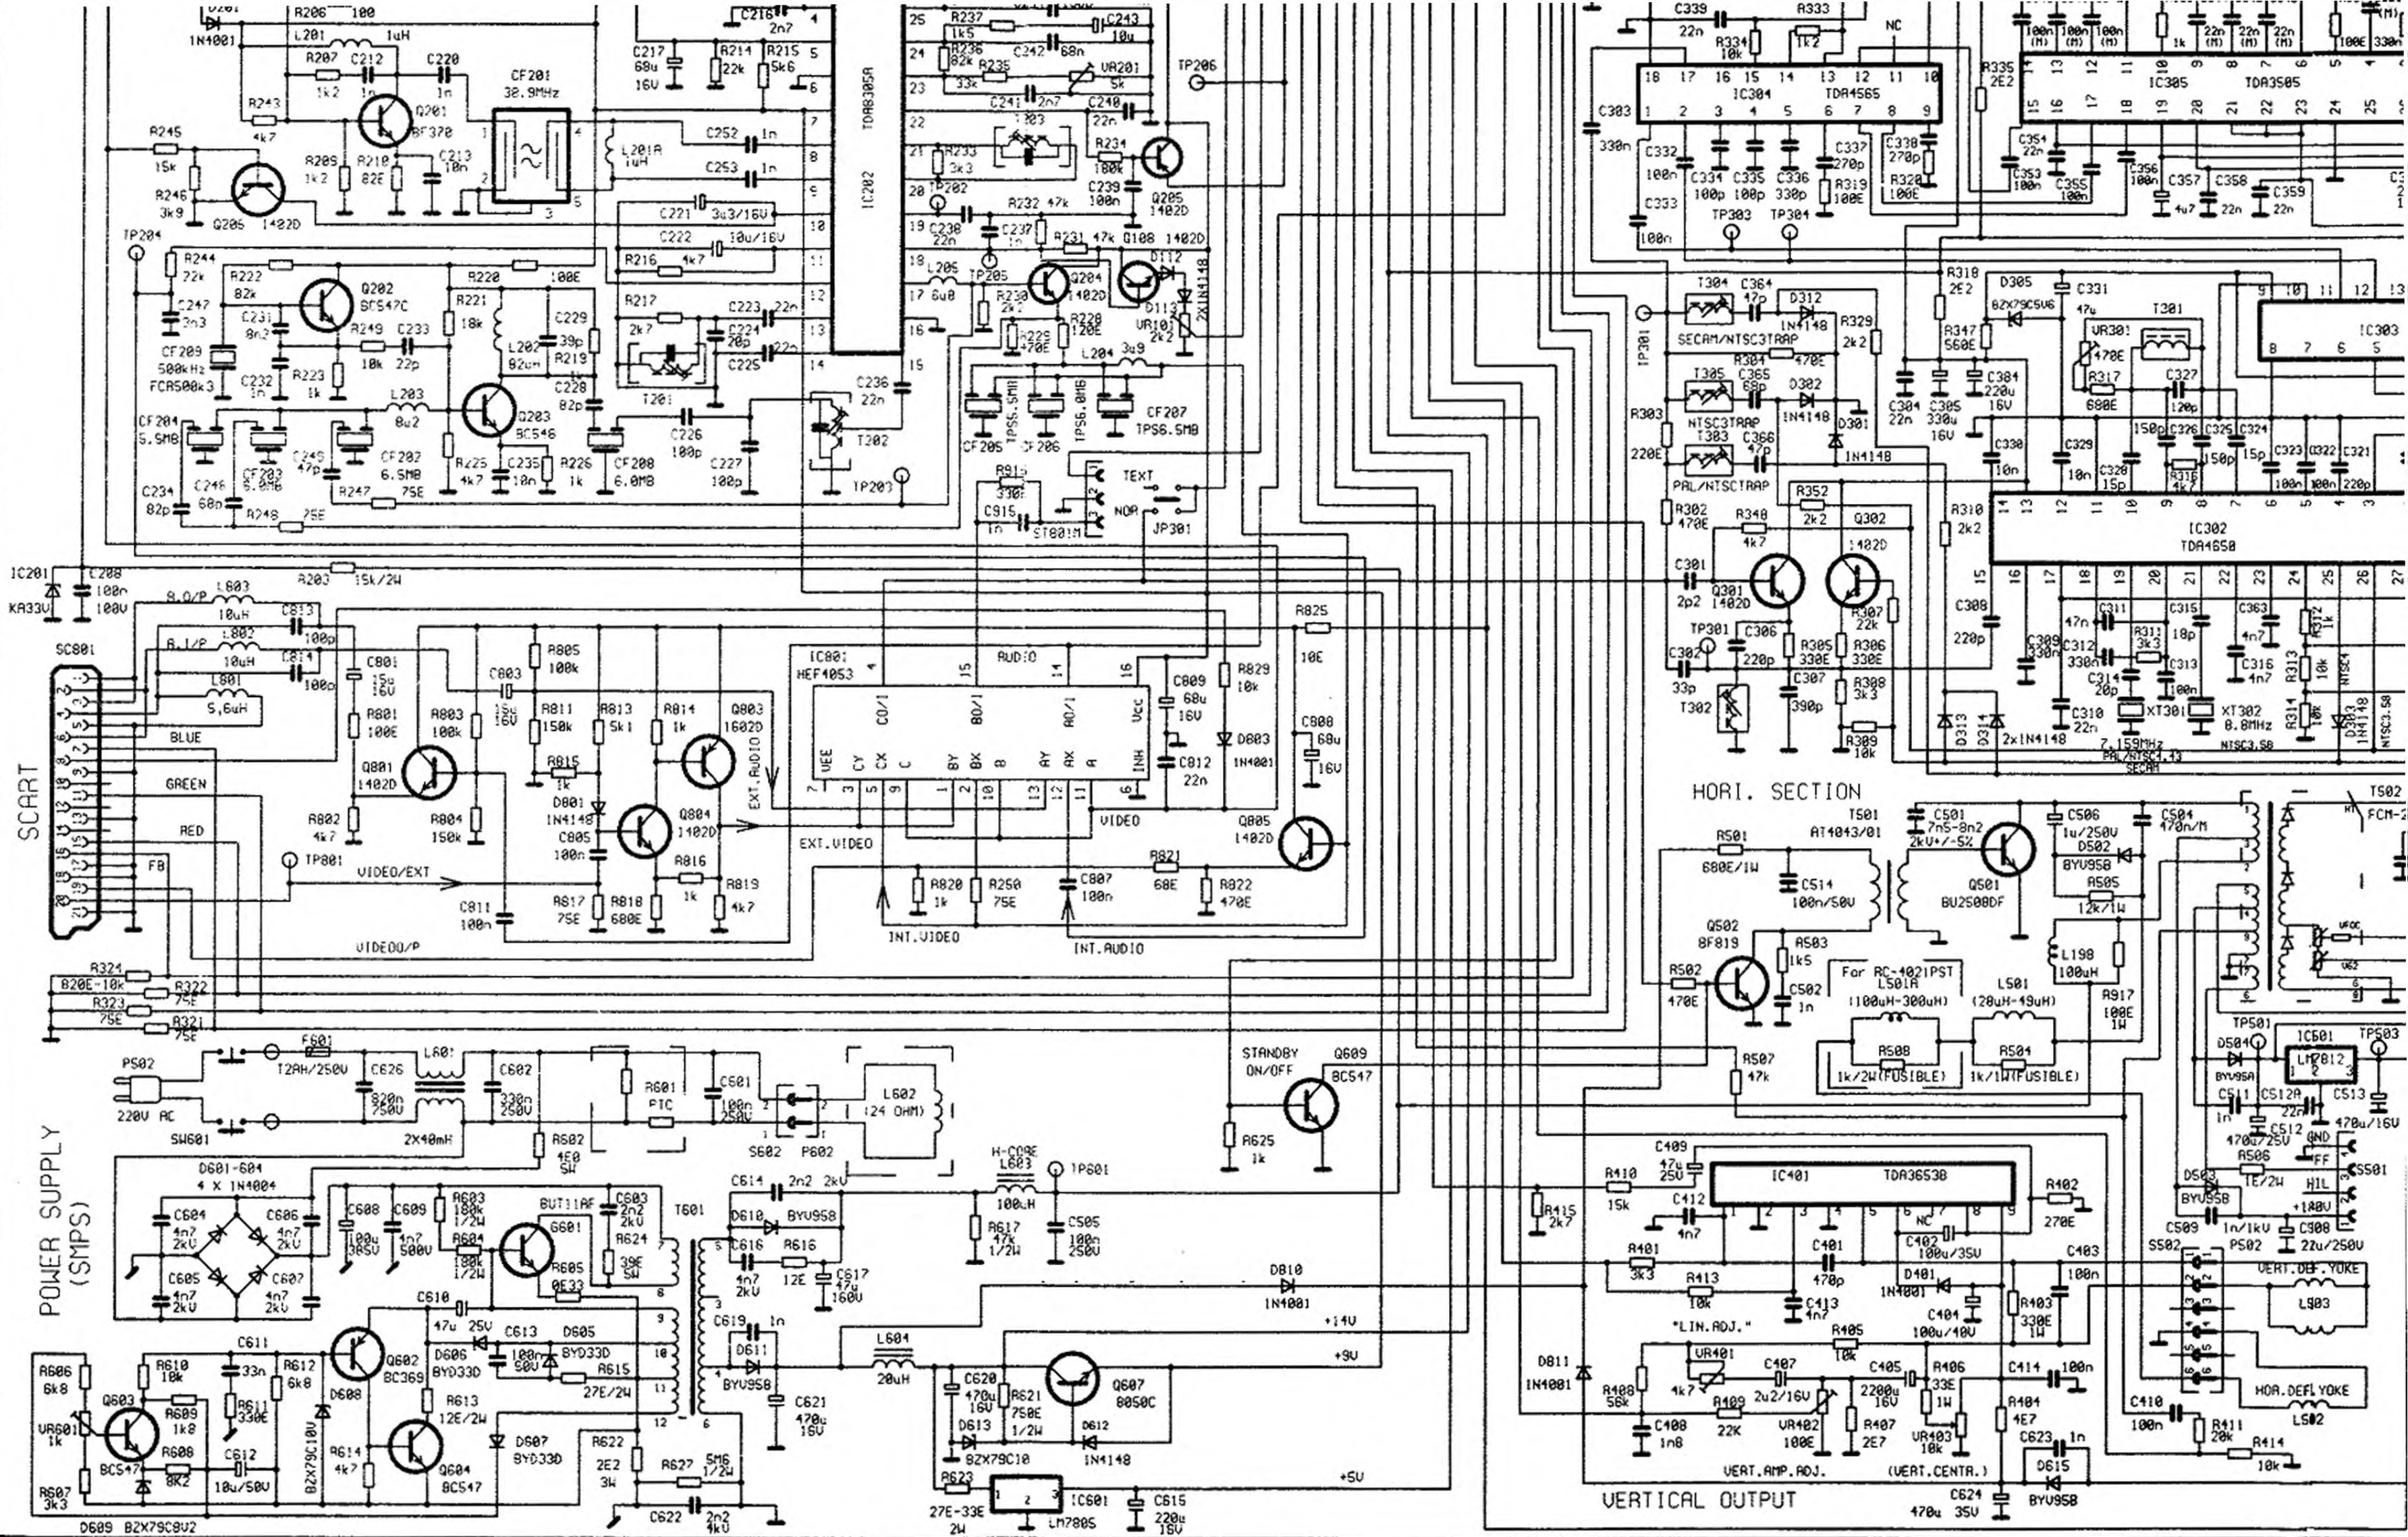


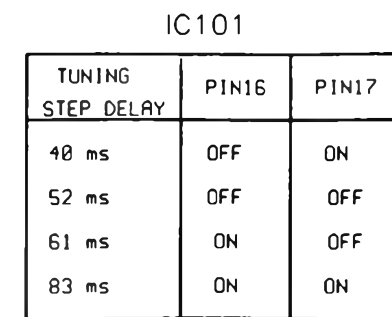

AXXION

SCHEMAT IDEOWY OTVC 20", 21"

RC4020, RC4120, RC4021

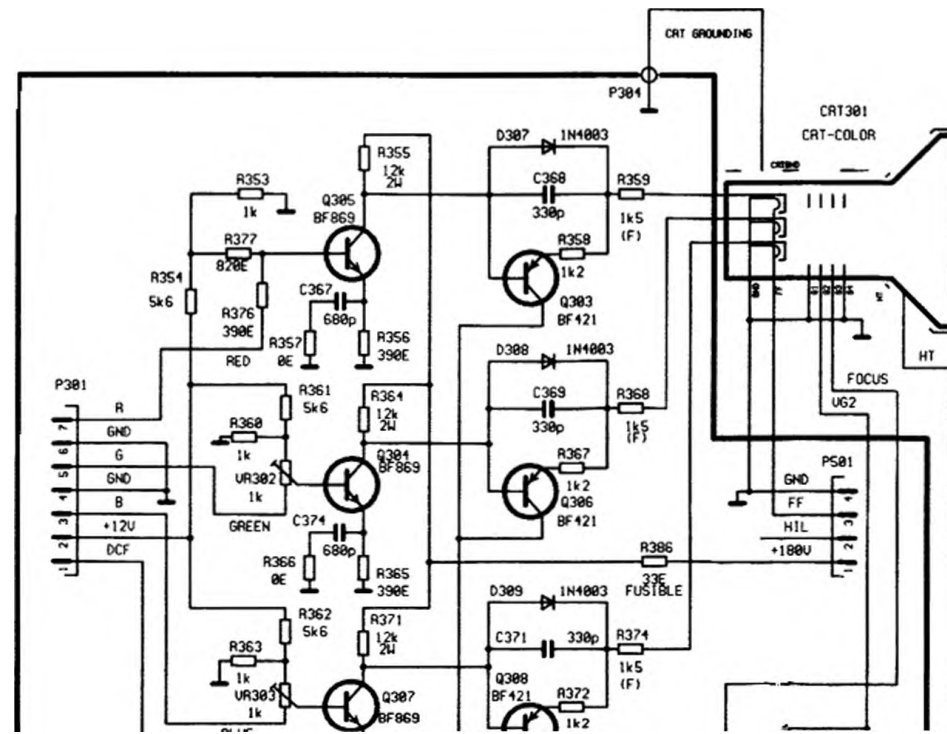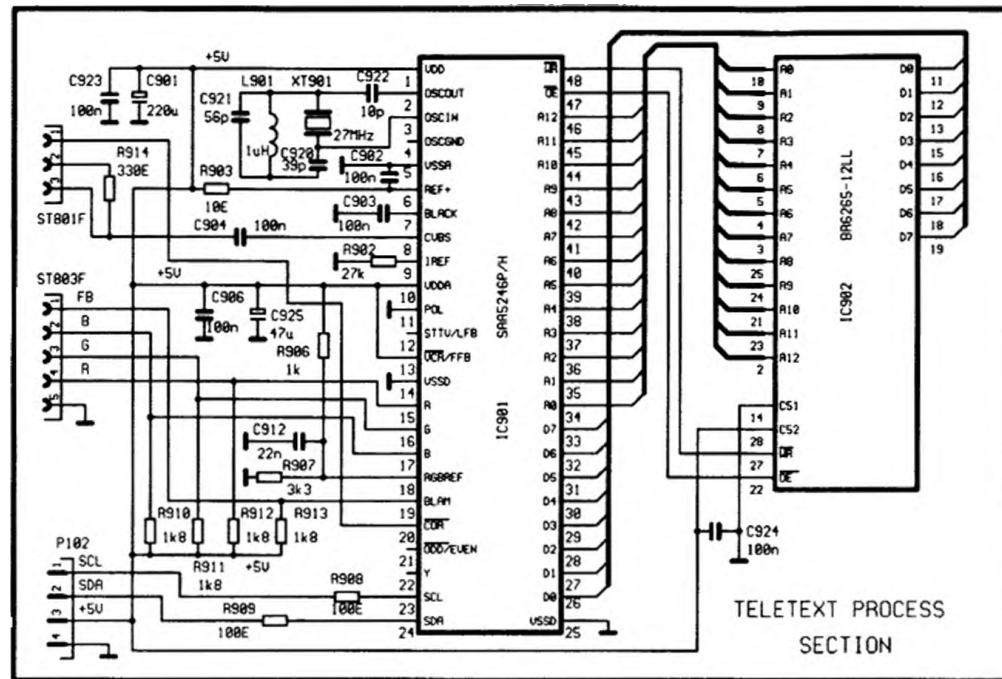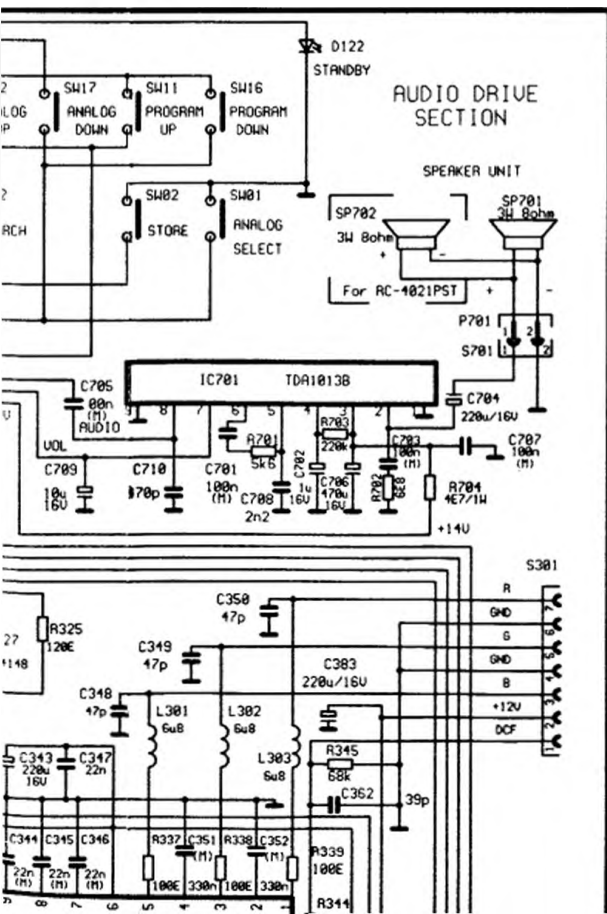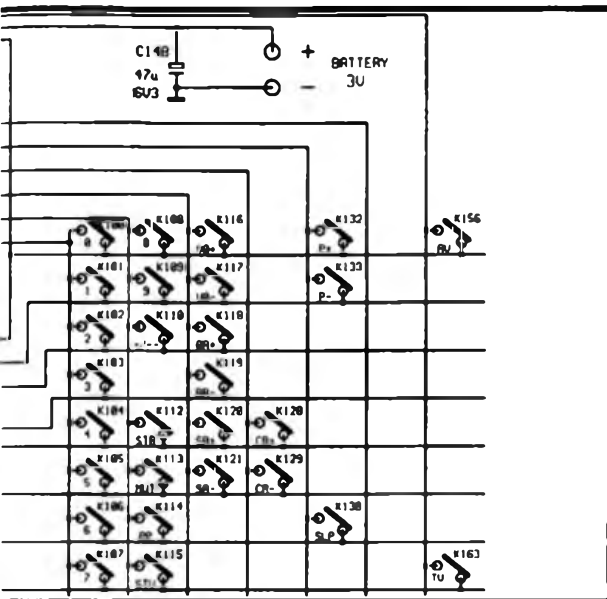

REMARK:

CONTROL RANGE TABLE

	MIN.	MAX.	CENTER
CONT.	2.8U	4.0U	
BRI.	0.9U	2.4U	
SAT	2.1U	3.3U	
HUE	1.5U	3.9U	2.8U

	A0	A1	A2
PCF8581	7b	8a	9b
PCF8582	7a	8b	9b

SCHEMATIC NOTES:

- RESISTANCE IS SHOWN IN OHMS $k=1.000$
 $M=1.000.000$
- CAPACITANCE IS SHOWN IN $\mu=uF$ $n=nF$ $p=pF$
T TANTALUM CAPACITOR
M FILM CAPACITOR
- STANDARD FILM RESISTOR (SFR25)
- VOLTAGE READ WITH DIGITAL VOLT-METER FROM POINT INDICATED TO CHASSIS GROUND USING A NORMAL PICTURE
- VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY $\pm 20\%$ (EXCEPT H.U.)
- SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE