
# CD40174BC,CD40174BM,CD40175BC,CD40175BM

CD40174BM CD40174BC Hex D Flip-Flop CD40175BM CD40175BC Quad D Flip-Flop



Literature Number: SNOS358A



# CD40174BM/CD40174BC Hex D Flip-Flop CD40175BM/CD40175BC Quad D Flip-Flop

#### **General Description**

The CD40174B consists of six positive-edge triggered D-type flip-flops; the true outputs from each flip-flop are externally available. The CD40175B consists of four positiveedge triggered D-type flip-flops; both the true and complement outputs from each flip-flop are externally available.

All flip-flops are controlled by a common clock and a common clear. Information at the D inputs meeting the set-up time requirements is transferred to the Q outputs on the positive-going edge of the clock pulse. The clearing operation, enabled by a negative pulse at Clear input, clears all Q outputs to logical "0" and  $\overline{Q}$ s (CD40175B only) to logical "1".

All inputs are protected from static discharge by diode clamps to  $V_{DD}$  and  $V_{SS}$ .

#### **Features**

- Wide supply voltage range
- 3V to 15V
- High noise immunity
- 0.45 V<sub>DD</sub> (typ.)
- Low power TTL compatibility
- fan out of 2 driving 74L or 1 driving 74 LS

CLEA

 $v_{\rm SS}$ 


TL/F/5987-2

CLOCK

CLOCK

- Equivalent to MC14174B, MC14175B
- Equivalent to MM74C174, MM74C175

#### **Connection Diagrams**

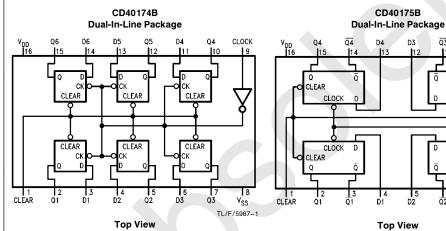

Order Number CD40174B or CD40175B

#### **Truth Table**

	Inputs	Outputs			
Clear	Clock	D	Q	<b>Q</b> ∗	
L	Х	Х	L	Н	
Н	1	Н	Н	L	
Н	1	L	L	Н	
Н	Н	X	NC	NC	
Н	L	X	NC	NC	

= High level

= Low level Irrelevant

= Transition from low to high level

= No change

 $= \overline{Q}$  for CD40175B only

## Absolute Maximum Ratings (Notes 1 & 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

DC Supply Voltage ( $V_{DD}$ ) -0.5V to +18V Input Voltage ( $V_{IN}$ ) -0.5V to  $V_{DD} + 0.5V_{DC}$  Storage Temperature Range ( $T_S$ )  $-65^{\circ}$ C to  $+150^{\circ}$ C

Storage Temperature Range (T<sub>S</sub>)
Power Dissipation (P<sub>D</sub>)

Dual-In-Line 700 mW Small Outline 500 mW

Lead Temperature (T<sub>L</sub>) (Soldering, 10 seconds)

# Recommended Operating

Conditions (Note 2)

DC Supply Voltage ( $V_{DD}$ ) 3V to 15  $V_{DC}$  Input Voltage ( $V_{IN}$ ) 0V to  $V_{DD}$   $V_{DC}$ 

Operating Temperature Range (T<sub>A</sub>) CD40XXXBM

### DC Electrical Characteristics CD40174BM/CD40175BM (Note 2)

260°C

Symbol	Parameter	Conditions	-5	5°C		+ 25°C		+ 125°C		Units
Syllibol	raiailletei	I		Max	Min	Тур	Max	Min	Max	Ullits
l <sub>DD</sub>	Quiescent Device Current	$V_{DD} = 5V, V_{IN} = V_{DD} \text{ or } V_{SS}$ $V_{DD} = 10V, V_{IN} = V_{DD} \text{ or } V_{SS}$ $V_{DD} = 15V, V_{IN} = V_{DD} \text{ or } V_{SS}$		1.0 2.0 4.0			1.0 2.0 4.0		30 60 120	μΑ μΑ μΑ
V <sub>OL</sub>	Low Level Output Voltage	$\begin{split} & I_O  < 1~\mu\text{A}\\ &V_{DD} = 5\text{V}\\ &V_{DD} = 10\text{V}\\ &V_{DD} = 15\text{V} \end{split}$		0.05 0.05 0.05			0.05 0.05 0.05		0.05 0.05 0.05	> > >
V <sub>OH</sub>	High Level Output Voltage	$\begin{split} & I_O  < 1~\mu\text{A}\\ &V_{DD} = 5\text{V}\\ &V_{DD} = 10\text{V}\\ &V_{DD} = 15\text{V} \end{split}$	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		> > >
V <sub>IL</sub>	Low Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V$ $V_{DD} = 10V, V_{O} = 1V \text{ or } 9V$ $V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$		1.5 3.0 4.0			1.5 3.0 4.0		1.5 3.0 4.0	> > >
V <sub>IH</sub>	High Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V$ $V_{DD} = 10V, V_{O} = 1V \text{ or } 9V$ $V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		V V V
loL	Low Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 0.4V$ $V_{DD} = 10V, V_{O} = 0.5V$ $V_{DD} = 15V, V_{O} = 1.5V$	0.64 1.6 4.2		0.51 1.3 3.4	0.88 2.25 8.8		0.36 0.9 2.4		mA mA mA
Гон	High Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$ $V_{DD} = 10V, V_{O} = 9.5V$ $V_{DD} = 15V, V_{O} = 13.5V$	-0.64 -1.6 -4.2		-0.51 -1.3 -3.4	-0.8.8 -2.25 -8.8		-0.36 -0.9 -2.4		mA mA mA
I <sub>IN</sub>	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		-0.1 0.1		-10 <sup>-5</sup>	-0.1 0.1		-1.0 1.0	μA μA

### DC Electrical Characteristics CD40174BC/CD40175BC (Note 2)

Symbol	Parameter	Conditions	-40°C		+ 25°C			+ 85°C		Units
Symbol	1 drameter	Conditions		Max	Min	Тур	Max	Min	Max	Oilles
I <sub>DD</sub>	Quiescent Device Current	$V_{DD} = 5V$ , $V_{IN} = V_{DD}$ or $V_{SS}$		4			4		30	μΑ
		$V_{DD} = 10V$ , $V_{IN} = V_{DD}$ or $V_{SS}$		8			8		60	μΑ
		$V_{DD} = 15V$ , $V_{IN} = V_{DD}$ or $V_{SS}$		16			16		120	μΑ

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions" and "Electrical Characteristics" provide conditions for actual device operation.

Note 2:  $V_{SS} = 0V$  unless otherwise specified.

Note 3:  $I_{\mbox{\scriptsize OH}}$  and  $I_{\mbox{\scriptsize OL}}$  are tested one output at a time.

## DC Electrical Characteristics CD40174BC/CD40175BC (Note 2) (Continued)

Symbol	Parameter	Conditions	−40°C		+ 25°C			+85°C		Units
Oymbor	i di dilictoi	Conditions	Min	Max	Min	Тур	Max	Min	Max	
V <sub>OL</sub>	Low Level Output Voltage			0.05			0.05		0.05	V
		$V_{DD} = 10V$		0.05			0.05		0.05	V
		$V_{DD} = 15V$		0.05			0.05		0.05	V
V <sub>OH</sub>	High Level Output Voltage	$V_{DD} = 5V$	4.95		4.95	5		4.95		V
		$V_{DD} = 10V$	9.95		9.95	10		9.95		V
		$V_{DD} = 15V$	14.95		14.95	15		14.95		V
V <sub>IL</sub>	Low Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V$		1.5			1.5		1.5	V
		$V_{DD} = 10V, V_{O} = 1V \text{ or } 9V$		3.0			3.0		3.0	V
		$V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$		4.0			4.0		4.0	V
V <sub>IH</sub>	High Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V$	3.5		3.5			3.5		V
		$V_{DD} = 10V$ , $V_{O} = 1V$ or 9V	7.0		7.0			7.0		V
		$V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$	11.0		11.0			11.0		V
loL	Low Level Output Current	$V_{DD} = 5V, V_{O} = 0.4V$	0.52		0.44	0.88		0.36		mA
	(Note 3)	$V_{DD} = 10V, V_{O} = 0.5V$	1.3		1.1	2.25		0.9		mA
		$V_{DD} = 15V, V_{O} = 1.5V$	3.6		3.0	8.8		2.4		mA
Гон	High Level Output Current	$V_{DD} = 5V, V_{O} = 4.6V$	-0.52		-0.44	-0.88		-0.36		mA
	(Note 3)	$V_{DD} = 10V, V_{O} = 9.5V$	-1.3		-1.1	-2.25		-0.9		mA
		$V_{DD} = 15V, V_{O} = 13.5V$	-3.6		-3.0	-8.8		-2.4		mA
I <sub>IN</sub>	Input Current	$V_{DD} = 15V, V_{IN} = 0V$		-0.30		-10-5	-0.30		-1.0	μΑ
		$V_{DD} = 15V, V_{IN} = 15V$		0.30		10-5	0.30		1.0	μΑ

AC Electrical Characteristics\*  $T_A = 25^{\circ}C,\, C_L = 50 \text{ pF},\, R_L = 200 \text{k and } t_f = t_f = 20 \text{ ns, unless otherwise specified}$ 

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Propagation Delay Time to a	$V_{DD} = 5V$		190	300	ns
	Logical "0" or Logical "1" from	$V_{DD} = 10V$		75	110	ns
	Clock to Q or Q (CD40175 Only)	$V_{DD} = 15V$		60	90	ns
t <sub>PHL</sub>	Propagation Delay Time to a	$V_{DD} = 5V$		180	300	ns
	Logical "0" from Clear to Q	$V_{DD} = 10V$		70	110	ns
		$V_{DD} = 15V$		60	90	ns
t <sub>PLH</sub>	Propagation Delay Time to a Logical	$V_{DD} = 5V$		230	400	ns
	"1" from Clear to Q (CD40175 Only)	$V_{DD} = 10V$		90	150	ns
		$V_{DD} = 15V$		75	120	ns
t <sub>SU</sub>	Time Prior to Clock Pulse that	$V_{DD} = 5V$		45	100	ns
	Data must be Present	$V_{DD} = 10V$		15	40	ns
		$V_{DD} = 15V$		13	35	ns
t <sub>H</sub>	Time after Clock Pulse that	$V_{DD} = 5V$		-11	0	ns
	Data Must be Held	$V_{DD} = 10V$		-4	0	ns
		$V_{DD} = 15V$		-3	0	ns
t <sub>THL</sub> , t <sub>TLH</sub>	Transition Time	$V_{DD} = 5V$		100	200	ns
		$V_{DD} = 10V$		50	100	ns
		$V_{DD} = 15V$		40	80	ns
t <sub>WH</sub> , t <sub>WL</sub>	Minimum Clock Pulse Width	$V_{DD} = 5V$		130	250	ns
		$V_{DD} = 10V$		45	100	ns
		$V_{DD} = 15V$		40	80	ns

AC Electrical Characteristics\*  $T_A=25^{\circ}\text{C, }C_L=50\text{ pF, }R_L=200\text{k and }t_r=t_f=20\text{ ns, unless otherwise specified (Continued)}$ 

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t <sub>WL</sub>	Minimum Clear Pulse Width	$V_{DD} = 5V$		120	250	ns
		$V_{DD} = 10V$		45	100	ns
		$V_{DD} = 15V$		40	80	ns
t <sub>RCL</sub>	Maximum Clock Rise Time	$V_{DD} = 5V$	15			μs
		$V_{DD} = 10V$	5.0			μs
		$V_{DD} = 15V$	5.0			μs
t <sub>fCL</sub>	Maximum Clock Fall Time	$V_{DD} = 5V$	15	50		μs
		$V_{DD} = 10V$	5.0	50		μs
		$V_{DD} = 15V$	5.0	50		μs
f <sub>CL</sub>	Maximum Clock Frequency	$V_{DD} = 5V$	2.0	3.5		MHz
		$V_{DD} = 10V$	5.0	10		MHz
		$V_{DD} = 15V$	6.0	12		MHz
C <sub>IN</sub>	Input Capacitance	Clear Input		10	15	pF
		Other Input		5.0	7.5	pF
C <sub>PD</sub>	Power Dissipation	Per Package (Note 4)		130		pF

 $<sup>^*\</sup>mbox{AC}$  Parameters are guaranteed by DC correlated testing.


Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions" and "Electrical Characteristics" provide conditions for actual device operation.

Note 2:  $V_{SS} = 0V$  unless otherwise specified.

Note 3:  $\mathbf{I}_{OH}$  and  $\mathbf{I}_{OL}$  are tested one output at a time.


Note 4: CpD determines the no load AC power consumption of any CMOS device. For complete explanation, see 54C/74C Family Characteristics application note, AN-90.

### **Switching Time Waveforms**




TL/F/5987-3

 $t_{r}=t_{f}=$  20 ns

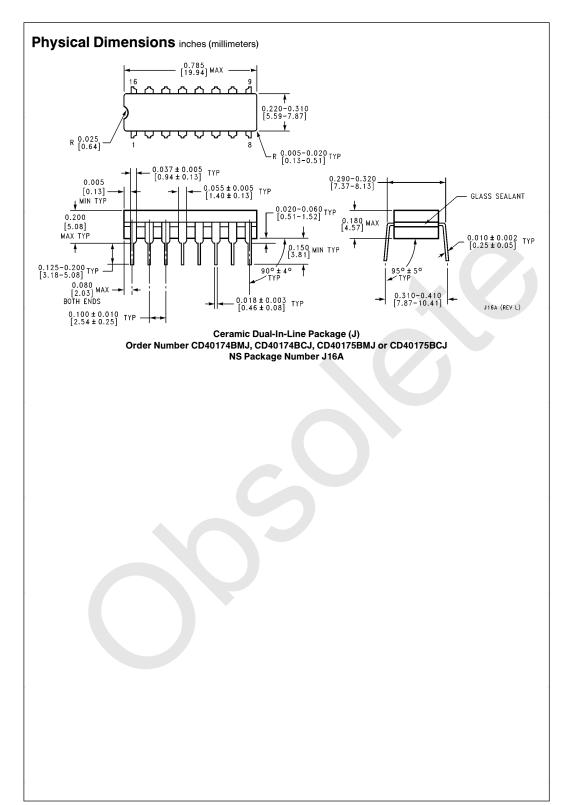

## Physical Dimensions inches (millimeters) (Continued)

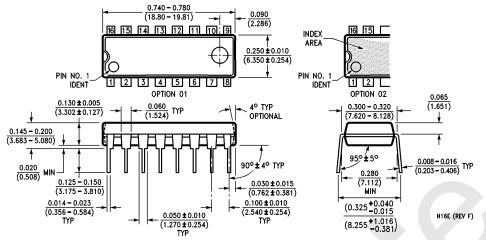

Molded Dual-In-Line Package (N) Order Number CD40174BMN, CD40174BCN, CD40174BMN or CD40175BCN NS Package Number N16E

#### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor** 

National Semiconducto Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018

**National Semiconductor** Europe

Fax: (+49) 0-180-530 85 86 Fax: (+49) U-18U-35U oo oo Email: onjwege etevm2.nsc.com Deutsch Tel: (+49) 0-180-530 85 85 English Tei: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 93 58 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.

Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

## Products Applications

interface.ti.com

Audio www.ti.com/audio Communications and Telecom www.ti.com/communications **Amplifiers** amplifier.ti.com Computers and Peripherals www.ti.com/computers dataconverter.ti.com Consumer Electronics www.ti.com/consumer-apps **Data Converters DLP® Products** www.dlp.com **Energy and Lighting** www.ti.com/energy DSP dsp.ti.com Industrial www.ti.com/industrial Clocks and Timers www.ti.com/clocks Medical www.ti.com/medical

Logic logic.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Security

Power Mgmt power.ti.com Transportation and Automotive www.ti.com/automotive
Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

RFID <u>www.ti-rfid.com</u>
OMAP Mobile Processors www.ti.com/omap

Interface

Wireless Connectivity www.ti.com/wirelessconnectivity

TI E2E Community Home Page <u>e2e.ti.com</u>

www.ti.com/security