
SCHS231D - SEPTEMBER 1998 - REVISED DECEMBER 2002

- AC Types Feature 1.5-V to 5.5-V Operation and Balanced Noise Immunity at 30% of the Supply
- Speed of Bipolar F, AS, and S, With **Significantly Reduced Power Consumption**
- **Balanced Propagation Delays**
- ±24-mA Output Drive Current Fanout to 15 F Devices
- SCR-Latchup-Resistant CMOS Process and **Circuit Design**
- **Exceeds 2-kV ESD Protection Per** MIL-STD-883, Method 3015

#### CD54AC74...F PACKAGE CD74AC74...E OR M PACKAGE (TOP VIEW)



#### description/ordering information

The 'AC74 dual positive-edge-triggered devices are D-type flip-flops.

A low level at the preset (PRE) or clear (CLR) inputs sets or resets the outputs, regardless of the levels of the other inputs. When PRE and CLR are inactive (high), data at the data (D) input meeting the setup time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not related directly to the rise time of the clock pulse. Following the hold-time interval, data at the D input can be changed without affecting the levels at the outputs.

#### ORDERING INFORMATION

TA	PACKAGET I		ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – E	Tube	CD74AC74E	CD74AC74E
–55°C to 125°C	SOIC – M	Tube	CD74AC74M	AC74M
-55 C to 125 C	SOIC - IVI	Tape and reel	CD74AC74M96	AC74IVI
	CDIP – F	Tube	CD54AC74F3A	CD54AC74F3A

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

#### **FUNCTION TABLE** (each flip-flop)

	INP	UTS		OUTI	PUTS
PRE	CLR	CLK	D	Q	Q
L	Н	Х	Х	Н	L
Н	L	X	Χ	L	Н
L	L	X	Χ	н‡	н‡
Н	Н	$\uparrow$	Н	Н	L
Н	Н	$\uparrow$	L	L	Н
Н	Н	L	Χ	$Q_0$	$\overline{Q}_0$

<sup>‡</sup> This configuration is nonstable; that is, it does not persist when PRE or CLR returns to its inactive (high) level.



testing of all parameters.


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



On products compliant to MIL-PRF-38535, all parameters are tested less otherwise noted. On all other products.

SCHS231D – SEPTEMBER 1998 – REVISED DECEMBER 2002

#### logic diagram, each flip-flop (positive logic)

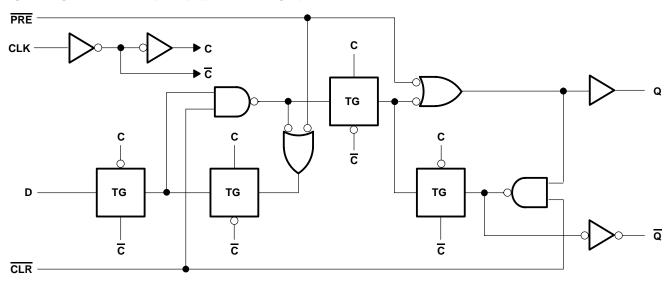

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	0.5 V to 6 V
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0 or V <sub>I</sub> > V <sub>CC</sub> ) (see Note 1)	
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> ) (see Note 1)	±50 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	±50 mA
Continuous current through V <sub>CC</sub> or GND	±100 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2): E package	80°C/W
M package	86°C/W
Storage temperature range, T <sub>stq</sub>	65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
  - 2. The package thermal impedance is calculated in accordance with JESD 51-7.



#### recommended operating conditions (see Note 3)

			T <sub>A</sub> = 25°C		–55°C to 125°C		–40°C to 85°C		UNIT	
		M		MAX	MIN	MAX	MIN	MAX		
Vсс	Supply voltage		1.5	5.5	1.5	5.5	1.5	5.5	V	
		V <sub>CC</sub> = 1.5 V	1.2		1.2		1.2			
٧ıH	High-level input voltage	V <sub>CC</sub> = 3 V	2.1		2.1		2.1		V	
		V <sub>CC</sub> = 5.5 V	3.85		3.85		3.85			
		V <sub>CC</sub> = 1.5 V		0.3		0.3		0.3		
VIL	Low-level input voltage	V <sub>CC</sub> = 3 V		0.9		0.9		0.9	V	
		V <sub>CC</sub> = 5.5 V		1.65		1.65		1.65		
٧ <sub>I</sub>	Input voltage		0	VCC	0	VCC	0	VCC	V	
٧o	Output voltage		0	VCC	0	VCC	0	VCC	V	
ІОН	High-level output current	V <sub>CC</sub> = 4.5 V to 5.5 V		-24		-24		-24	mA	
loL	Low-level output current	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		24		24		24	mA	
Δt/Δν	Input transition rise or fall rate	$V_{CC} = 1.5 \text{ V to 3 V}$		50		50		50		
ΔψΔV	Input transition rise or fall rate	$V_{CC} = 3.6 \text{ V to } 5.5 \text{ V}$		20		20		20	ns/V	

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		Vcc	T <sub>A</sub> = 25°C	–55°0 125°		–40°C to 85°C		UNIT
				MIN MAX	MIN	MAX	MIN	MAX	
			1.5 V	1.4	1.4		1.4		
		I <sub>OH</sub> = -50 μA	3 V	2.9	2.9		2.9		
			4.5 V	4.4	4.4		4.4		
Voн	$V_I = V_{IH}$ or $V_{IL}$	$I_{OH} = -4 \text{ mA}$	3 V	2.58	2.4		2.48		V
		$I_{OH} = -24 \text{ mA}$	4.5 V	3.94	3.7		3.8		
		$I_{OH} = -50 \text{ mA}^{\dagger}$	5.5 V		3.85				
		$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V				3.85		
			1.5 V	0.1		0.1		0.1	
		I <sub>OL</sub> = 50 μA	3 V	0.1		0.1		0.1	
			4.5 V	0.1		0.1		0.1	
$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$	I <sub>OL</sub> = 12 mA	3 V	0.36	5	0.5		0.44	V
		I <sub>OL</sub> = 24 mA	4.5 V	0.36	5	0.5		0.44	
		I <sub>OL</sub> = 50 mA†	5.5 V			1.65			
		I <sub>OL</sub> = 75 mA <sup>†</sup>	5.5 V					1.65	
IĮ	$V_I = V_{CC}$ or GND	-	5.5 V	±0.′		±1		±1	μΑ
ICC	$V_I = V_{CC}$ or GND,	IO = 0	5.5 V	4		80		40	μΑ
Ci				10	)	10		10	pF

<sup>†</sup> Test one output at a time, not exceeding 1-second duration. Measurement is made by forcing indicated current and measuring voltage to minimize power dissipation. Test verifies a minimum 50-Ω transmission-line drive capability at 85°C and 75-Ω transmission-line drive capability at 125°C.



SCHS231D - SEPTEMBER 1998 - REVISED DECEMBER 2002

# timing requirements over recommended operating free-air temperature range, $V_{CC} = 1.5 \text{ V}$ (unless otherwise noted)

			–55°( 125		–40°C to 85°C		UNIT	
			MIN	MAX	MIN	MAX		
fclock	Clock frequency			9		10	MHz	
	Pulse duration	PRE or CLR low	50		44		ns	
t <sub>W</sub>		CLK	56		49		115	
+	Catus time	Data	44		39		ns	
t <sub>su</sub>	Setup time	PRE or CLR inactive					ns	
t <sub>h</sub>	Hold time	Data after CLK↑	0		0		ns	
t <sub>rec</sub>	Recovery time, before CLK↑	CLR↑ or PRE↑	34		30		ns	

# timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

			–55°0 125		–40°C to 85°C		UNIT	
			MIN MA		MIN	MAX		
fclock	Clock frequency			79		90	MHz	
	Pulse duration	PRE or CLR low	5.6		4.9		ns	
t <sub>W</sub>	Pulse duration	CLK	6.3		5.5		115	
	Cotup time	Data	4.9		4.3		ns	
t <sub>su</sub>	Setup time	PRE or CLR inactive					ns	
t <sub>h</sub>	Hold time	Data after CLK↑	0		0		ns	
t <sub>rec</sub>	Recovery time, before CLK↑	CLR↑ or PRE↑	4.7		4.1		ns	

# timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

			–55° 125		–40°C to 85°C		UNIT
			MIN	MAX	MIN	MAX	
fclock	Clock frequency			110		125	MHz
	Pulse duration	PRE or CLR low	4		3.5		ns
t <sub>W</sub>	Pulse duration	CLK	4.5		3.9		115
+	Cotup time	Data	3.5		3.1		ns
t <sub>su</sub>	Setup time	PRE or CLR inactive					ns
t <sub>h</sub>	Hold time	Data after CLK↑	0		0		ns
t <sub>rec</sub>	Recovery time, before CLK↑	CLR↑ or PRE↑	2.7	·	2.4		ns

SCHS231D - SEPTEMBER 1998 - REVISED DECEMBER 2002

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 1.5 V, $C_L$ = 50 pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	–55°C to 125°C				UNIT
	(1141 01)	(0011 01)	MIN	MAX	85°C MIN MA 10 1 1	MAX	
f <sub>max</sub>			9		10		MHz
t <sub>PLH</sub>	Q1.K	0 xx <del>0</del>		125		114	20
t <sub>PHL</sub>	CLK	${\sf Q}$ or $\overline{\sf Q}$		125		114	ns
t <sub>PLH</sub>	PRE or CLR	Q or $\overline{\mathbb{Q}}$		132		120	ne
t <sub>PHL</sub>	PRE OF CER	QorQ		144		131	ns

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	–55°( 125		–40°0 85°	UNIT	
	(1141 01)	(0011 01)	MIN	MAX	MIN	MAX	
f <sub>max</sub>			79		90		MHz
t <sub>PLH</sub>	CLK	0 0	3.5	14	3.6	12.7	ns
t <sub>PHL</sub>	CLK	Q or Q	3.5	14	3.6	12.7	115
tPLH	PRE or CLR	0 or 0	3.7	14.7	3.8	13.4	ne
<sup>t</sup> PHL	FRE UI CER	Q or Q	4	16.1	4.1	14.6	ns

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	–55°C to 125°C		–40°C to 85°C		UNIT
	(1141 01)	(0011 01)	MIN	MAX	125 10 2.6	MAX	
f <sub>max</sub>			110		125		MHz
tPLH	OLK.	0	2.5	10	2.6	9.1	no
t <sub>PHL</sub>	CLK	Q or Q	2.5	10	2.6	9.1	ns
tPLH	PRE or CLR	Q or $\overline{\mathbb{Q}}$	2.6	10.5	2.7	9.5	20
<sup>t</sup> PHL	FRE OI CER	Q 61 Q	2.9	11.5	3	10.4	ns

#### operating characteristics, T<sub>A</sub> = 25°C

		PARAMETER	TYP	UNIT
I	C <sub>pd</sub>	Power dissipation capacitance	55	pF



#### PARAMETER MEASUREMENT INFORMATION

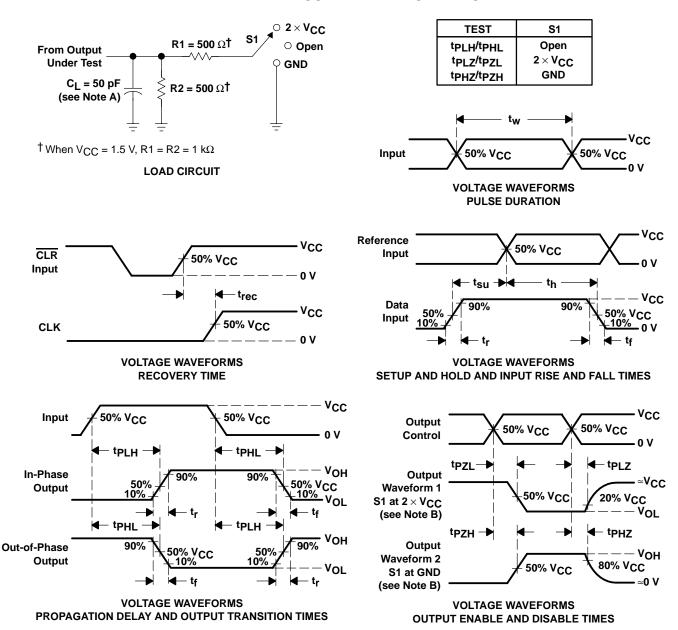

- NOTES: A. C<sub>L</sub> includes probe and test-fixture capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 1 MHz, Z<sub>Ω</sub> = 50 Ω, t<sub>f</sub> = 3 ns, t<sub>f</sub> = 3 ns. Phase relationships between waveforms are arbitrary.
  - D. For clock inputs, f<sub>max</sub> is measured with the input duty cycle at 50%.
  - E. The outputs are measured one at a time with one input transition per measurement.
  - F. tpLH and tpHL are the same as tpd.
  - G. tpz and tpzH are the same as ten.
  - H. tpLz and tpHz are the same as tdis.

Figure 1. Load Circuit and Voltage Waveforms



#### PACKAGE OPTION ADDENDUM

www.ti.com 15-Oct-2009

#### PACKAGING INFORMATION

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
CD54AC74F3A	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type
CD74AC74E	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD74AC74EE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
CD74AC74M	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74AC74M96	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74AC74M96E4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74AC74M96G4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74AC74ME4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CD74AC74MG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

### PACKAGE MATERIALS INFORMATION


www.ti.com 14-Jul-2012

#### TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**

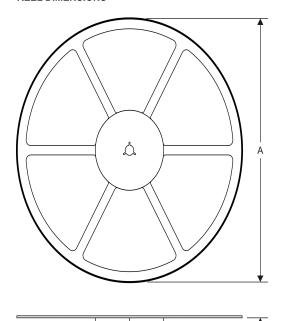

#### **TAPE DIMENSIONS**

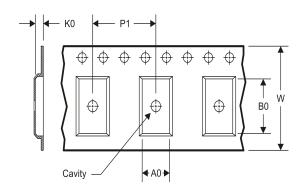

A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### TAPE AND REEL INFORMATION

\*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74AC74M96	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

www.ti.com 14-Jul-2012



#### \*All dimensions are nominal

ĺ	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
	CD74AC74M96	SOIC	D	14	2500	367.0	367.0	38.0

#### 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## N (R-PDIP-T\*\*)

### PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



## D (R-PDSO-G14)

#### PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.



# D (R-PDSO-G14)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

#### Products Applications

Audio Automotive and Transportation www.ti.com/automotive www.ti.com/audio **Amplifiers** amplifier.ti.com Communications and Telecom www.ti.com/communications **Data Converters** dataconverter.ti.com Computers and Peripherals www.ti.com/computers DI P® Products Consumer Electronics www.dlp.com www.ti.com/consumer-apps DSP dsp.ti.com **Energy and Lighting** www.ti.com/energy

Clocks and Timers www.ti.com/clocks Industrial www.ti.com/medical Interface interface.ti.com Medical www.ti.com/security

Power Mgmt <u>power.ti.com</u> Space, Avionics and Defense <u>www.ti.com/space-avionics-defense</u>

Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

RFID www.ti-rfid.com

OMAP Applications Processors www.ti.com/omap TI E2E Community e2e.ti.com

Wireless Connectivity <u>www.ti.com/wirelessconnectivity</u>