

16-Mbit (1 M × 16 / 2 M × 8) Static RAM

Features

■ Configurable as 1 M × 16 or as 2 M × 8 SRAM

■ Very high speed: 45 ns

■ Wide voltage range: 4.5 V to 5.5 V

■ Ultra low standby power

□ Typical standby current: 1.5 μA □ Maximum standby current: 12 μA

■ Ultra low active power

□ Typical active current: 2.2 mA at f = 1 MHz

■ Easy memory expansion with \overline{CE}_1 , CE_2 , and \overline{OE} features

■ Automatic power-down when deselected

■ CMOS for optimum speed and power

■ Offered in 48-pin TSOP I package

Functional Description


The CY62167E is a high performance CMOS static RAM organized as 1 M words by 16-bits/2 M words by 8-bits. This device features advanced circuit design to provide an ultra low active current. This is ideal for providing More Battery Life $^{\rm TM}$ (MoBL $^{\rm (MoBL)}$) in portable applications such as cellular telephones. The device also has an automatic power down feature that

reduces power consumption when addresses are not toggling. Place the device into standby mode when deselected (CE₁ HIGH, or CE₂ LOW, or both BHE and BLE are HIGH). The input and output pins (I/O $_0$ through I/O $_{15}$) are placed in a high impedance state when:

- The device is deselected (CE₁ HIGH or CE₂ LOW)
- Outputs are disabled (OE HIGH)
- <u>Both</u> byte high enable and byte low enable are disabled (BHE, BLE HIGH) or
- A write operation is in progress (\overline{CE}_1 LOW, CE_2 HIGH, and \overline{WE} LOW)

To write to the device, take chip enables (CE₁ LOW and CE₂ <u>HIGH</u>) and write enable (WE) input LOW. If byte low enable (BLE) is LOW, then data from I/O pins (I/O₀ through I/O₇), is written into the location specified on the address pins (A₀ through A₁₉). If byte high enable (BHE) is LOW, then data from the I/O pins (I/O₈ through I/O₁₅) is written into the location specified on the address pins (A₀ through A₁₉).

To read from the device, tak<u>e</u> chip enables ($\overline{\text{CE}}_1$ LOW and CE₂ HIGH) <u>and</u> output enable ($\overline{\text{OE}}$) LOW <u>while</u> forcing the write enable ($\overline{\text{WE}}$) HIGH. If byte low enable ($\overline{\text{BLE}}$) is LOW, then data from the memory location specified <u>by the</u> address pins appears on I/O₀ to I/O₇. If byte high enable ($\overline{\text{BHE}}$) is LOW, then data from memory appears on I/O₈ to I/O₁₅. See Truth Table on page 12 for a complete description of read and write modes.

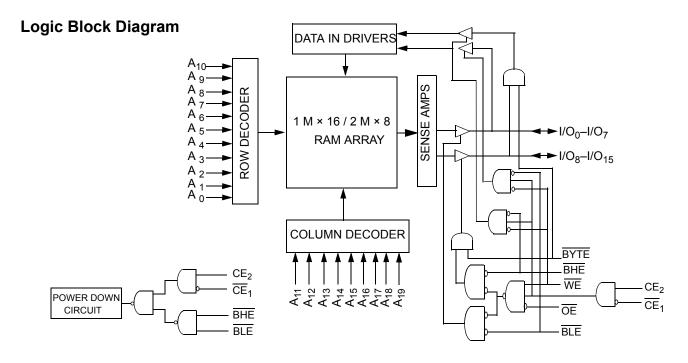

Cypress Semiconductor Corporation Document Number: 001-15607 Rev. *C

198 Champion Court

San Jose, CA 95134-1709

408-943-2600

Revised June 10, 2011

CY62167E MoBL®



Contents


Pin Configuration	3
Product Portfolio	. 3
Maximum Ratings	. 4
Operating Range	. 4
Electrical Characteristics	
Capacitance	
Thermal Resistance	
AC Test Loads and Waveforms	. 5
Data Retention Characteristics	. 6
Data Retention Waveform	. 6
Switching Characteristics	. 7
Switching Waveforms	

Truth Table	12
Ordering Information	13
Ordering Code Definitions	13
Package Diagram	14
Acronyms	15
Document Conventions	15
Units of Measure	15
Document History Page	16
Sales, Solutions, and Legal Information	17
Worldwide Sales and Design Support	17
Products	17
DSoC Solutions	17



Pin Configuration

48-pin TSOP I Top View [1, 2]

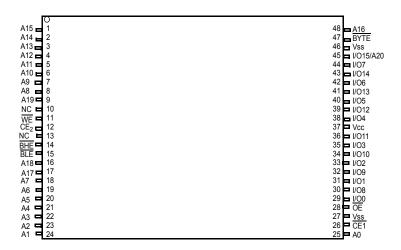

Product Portfolio

							Power Di	ssipation		
Product	V _{CC} Range (V)		Speed (ns)	Operating I _{CC} (mA)			Standby L. (uA)			
Floudet				f = 1 MHz		f = f _{max}		- Standby I _{SB2} (μA)		
	Min	Typ ^[3]	Max		Typ ^[3]	Max	Typ ^[3]	Max	Typ ^[3]	Max
CY62167ELL	4.5	5.0	5.5	45	2.2	4.0	25	30	1.5	12

^{1.} NC pins are not connected on the die.
2. The BYTE pin in the 48-pin TSOPI package must be tied to V_{CC} to use the device as a 1 M × 16 SRAM. The 48-TSOPI package can also be used as a 2 M × 8 SRAM by tying the BYTE signal to V_{SS}. In the 2 M × 8 configuration, pin 45 is A20, while BHE, BLE and I/O₈ to I/O₁₄ pins are not used.
3. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = V_{CC(typ)}, T_A = 25 °C.



Maximum Ratings

Exceeding maximum ratings may shorten the useful life of the device. User guidelines are not tested. Storage temperature-65 °C to +150 °C Ambient temperature with Supply voltage to ground potential-0.5 V to 6.0 V DC voltage applied to outputs in high Z state $^{[4,\ 5]}$ -0.5 V to 6.0 V

DC input voltage ^[4, 5]	0.5 V to 6.0 V
Output current into outputs (LOW)	20 mA
Static discharge voltage(MIL-STD-883, method 3015)	>2001 V
Latch-up current	>200 mA

Operating Range

Device	Range	Ambient Temperature	V _{CC} ^[6]	
CY62167ELL	Industrial	–40 °C to +85 °C	4.5 V to 5.5 V	

Electrical Characteristics

Over the Operating Range

Doromotor	Description	Toot Co	anditions.		l lmi4		
Parameter	Description	lest Co	Test Conditions			Max	Unit
V _{OH}	Output HIGH voltage	$I_{OH} = -1.0 \text{ mA}$		2.4	_	_	V
V _{OL}	Output LOW voltage	I _{OL} = 2.1 mA		_	_	0.4	V
V _{IH}	Input HIGH voltage	V _{CC} = 4.5 V to 5.5	5 V	2.2	_	V _{CC} + 0.5 V	V
V _{IL}	Input LOW voltage	V _{CC} = 4.5 V to 5.5	V _{CC} = 4.5 V to 5.5 V			0.7 ^[7]	V
I _{IX}	Input leakage current	$GND \leq V_I \leq V_CC$	GND ≤ V _I ≤ V _{CC}			+1	μA
I _{OZ}	Output leakage current	$GND \le V_O \le V_{CC}$, output disabled	-1	-	+1	μA
I _{CC}	V _{CC} operating supply current	$f = f_{MAX} = 1/t_{RC}$	V _{CC} = V _{CC(max)}	_	25	30	mA
		f = 1 MHz	CMOS levels	-	2.2	4.0	mA
I _{SB2} ^[9]	Automatic power down current—CMOS inputs	$\label{eq:control_control_control} \begin{split} \overline{\text{CE}}_1 &\geq \text{V}_{\text{CC}} - 0.2 \text{ V or CE}_2 \leq 0.2 \text{ V, or} \\ \text{BHE and BLE} &\geq \text{V}_{\text{CC}} - 0.2 \text{ V,} \\ \text{V}_{\text{IN}} &\geq \text{V}_{\text{CC}} - 0.2 \text{ V or V}_{\text{IN}} \leq 0.2 \text{ V,} \\ \text{f} &= 0, \text{V}_{\text{CC}} = \text{V}_{\text{CC}}(\text{max}) \end{split}$		-	1.5	12	μА

- 4. $V_{IL}(min) = -2.0 \text{ V}$ for pulse durations less than 20 ns.
- Σ V_{IH}(max) = V_{CC} + 0.75 V for pulse durations less than 20 ns.
 Full Device AC operation is based on a 100 μs ramp time from 0 to V_{CC}(min) and 200 μs wait time after V_{CC} stabilization.
- 7. Under DC conditions the device meets a V_{IL} of 0.8 V. However, in dynamic conditions input LOW voltage applied to the device must not be higher than 0.7 V.
- 8. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = V_{CC}(typ), T_A = 25 °C
 9. Chip enables (CE₁ and CE₂), byte enables (BHE and BLE) and BYTE need to be tied to CMOS levels to meet the I_{SB2} / I_{CCDR} spec. Other inputs can be left floating.



Capacitance


Parameter ^[10]	Description	Test Conditions	Max	Unit
C _{IN}	Input capacitance	$T_A = 25 ^{\circ}\text{C}, f = 1 \text{MHz}, V_{CC} = V_{CC(typ)}$	10	pF
C _{OUT}	Output capacitance		10	pF

Thermal Resistance

I	Parameter ^[10]	Description	Test Conditions	48-pin TSOP I	Unit
	Θ_{JA}	Thermal resistance (junction to ambient)	Still air, soldered on a 3 × 4.5 inch, two-layer printed circuit board	60	°C/W
	$\Theta_{\sf JC}$	Thermal resistance (junction to case)		4.3	°C/W

AC Test Loads and Waveforms

Figure 1. AC Test Loads and Waveforms

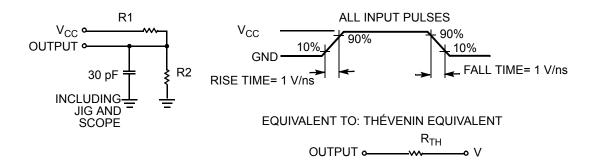

Parameters	Values	Unit
R1	1800	Ω
R2	990	Ω
R _{TH}	639	Ω
V _{TH}	1.77	V

Note

^{10.} Tested initially and after any design or process changes that may affect these parameters.




Data Retention Characteristics

Over the operating range

Parameter	Description	Conditions	Min	Typ ^[11]	Max	Unit
V_{DR}	V _{CC} for data retention	-	2.0	_	_	V
I _{CCDR} ^[12]	Data retention current	$\begin{split} & \underline{V_{CC}} = V_{DR}, \\ & \underline{CE_1} \geq V_{CC} - 0.2 \text{ V or } CE_2 \leq 0.2 \text{ V, or} \\ & \underline{BHE} \text{ and } \underline{BLE} \geq V_{CC} - 0.2 \text{ V,} \\ & V_{IN} \geq V_{CC} - 0.2 \text{ V or } V_{IN} \leq 0.2 \text{ V} \end{split}$	-	-	12	μA
t _{CDR} ^[13]	Chip deselect to data retention time	-	0	_	_	ns
t _R ^[14]	Operation recovery time	-	45	-	-	ns

Data Retention Waveform

Figure 2. Data Retention Waveform^[15]

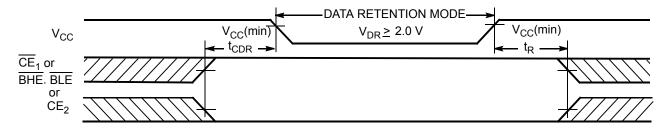

^{11.} Typical values <u>are</u> included for reference on<u>ly and are not</u> guar<u>anteed</u> or tested. Typical values are measured at V_{CC} = V_{CC}(typ), T_A = 25 °C.

12. Chip enables (CE₁ and CE₂), byte enables (BHE and BLE) and BYTE need to be tied to CMOS levels to meet the I_{SB2} / I_{CCDR} spec. Other inputs can be left floating.

13. Tested initially and after any design or process changes that may affect these parameters.

14. <u>Full device</u> operation req<u>uires</u> linear V_{CC} ramp from V_{DR} to V_{CC}(min) ≥ 100 μs or stable at V_{CC}(min) ≥ 100 μs.

15. BHE. BLE is the AND of BHE and BLE. Deselect the chip by either disabling the chip enable signals or by disabling BHE and BLE.



Switching Characteristics

Over the Operating Range

Parameter [16, 17]	Do a seintia n	45	ns	11.4
Parameter			Max	Unit
Read Cycle		<u> </u>		
t _{RC}	Read cycle time	45	_	ns
t _{AA}	Address to data valid	_	45	ns
t _{OHA}	Data hold from address change	10	_	ns
t _{ACE}	CE ₁ LOW and CE ₂ HIGH to data valid	_	45	ns
t _{DOE}	OE LOW to data valid	_	22	ns
t _{LZOE}	OE LOW to low Z ^[18]	5	_	ns
t _{HZOE}	OE HIGH to high Z ^[18, 19]	_	18	ns
t _{LZCE}	CE ₁ LOW and CE ₂ HIGH to low Z ^[18]	10	_	ns
t _{HZCE}	CE ₁ HIGH and CE ₂ LOW to high Z ^[18, 19]	_	18	ns
t _{PU}	CE ₁ LOW and CE ₂ HIGH to power-up	0	_	ns
t _{PD}	CE ₁ HIGH and CE ₂ LOW to power-down	_	45	ns
t _{DBE}	BLE/BHE LOW to data valid	_	45	ns
t _{LZBE}	BLE/BHE LOW to low Z ^[18, 20]	5	_	ns
t _{HZBE}	BLE/BHE HIGH to high Z ^[18, 19]	_	18	ns
Write Cycle ^[21]				
t _{WC}	Write cycle time	45	_	ns
t _{SCE}	CE ₁ LOW and CE ₂ HIGH to write end	35	_	ns
t _{AW}	Address setup to write end	35	_	ns
t _{HA}	Address hold from write end	0	_	ns
t _{SA}	Address setup to write start	0	_	ns
t _{PWE}	WE pulse width	35	_	ns
t _{BW}	BLE/BHE LOW to write end	35	_	ns
t _{SD}	Data setup to write end	25	_	ns
t _{HD}	Data hold from write end	0	_	ns
t _{HZWE}	WE LOW to high Z ^[18, 19]	_	18	ns
t _{LZWE}	WE HIGH to low Z ^[18]	10	_	ns

 ^{16.} Test conditions for all parameters other than tristate parameters assume signal transition time of 1 V/ns, timing reference levels of V_{CC}(typ)/2, input pulse levels of 0 to V_{CC}(typ), and output loading of the specified I_{OL}/I_{OH} as shown in Figure 1 on page 5.
 17. AC timing parameters are subject to byte enable signals (BHE or BLE) not switching when chip is disabled. See application note AN13842 for further clarification.

^{18.} At any temperature and voltage condition, t_{HZCE} is less than t_{LZEE}, t_{HZDE} is less than t_{LZBE}, t_{HZOE}, and t_{HZWE} is less than t_{LZWE} for any device.

19. t_{HZOE}, t_{HZCE}, t_{HZBE}, and t_{HZWE} transitions are measured when the outputs enter a high impedance state.

^{20.} If both byte enables are toggled together, this value is 10 ns. $\,$

^{21.} The internal write time of the memory is defined by the overlap of WE, CE₁ = V_{IL}, BHE or BLE or both = V_{IL}, and CE₂ = V_{IH}. All signals must be active to initiate a write and any of these signals can terminate a write by going inactive. The data input setup and hold timing should be referenced to the edge of the signal that terminates the write.



Switching Waveforms

Figure 3. Read Cycle No. 1 (Address Transition Controlled) $^{[22,\,23]}$


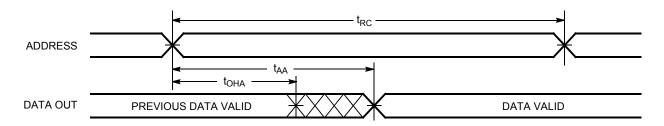


Figure 4. Read Cycle No. 2 (OE Controlled) [23, 24]




^{22.} The device is continuously selected. \overline{OE} , $\overline{CE}_1 = V_{IL}$, \overline{BHE} , \overline{BLE} or both = V_{IL} , and $CE_2 = V_{IH}$. 23. \overline{WE} is HIGH for read cycle. 24. Address valid before or similar to \overline{CE}_1 , \overline{BHE} , \overline{BLE} transition LOW and CE_2 transition HIGH.

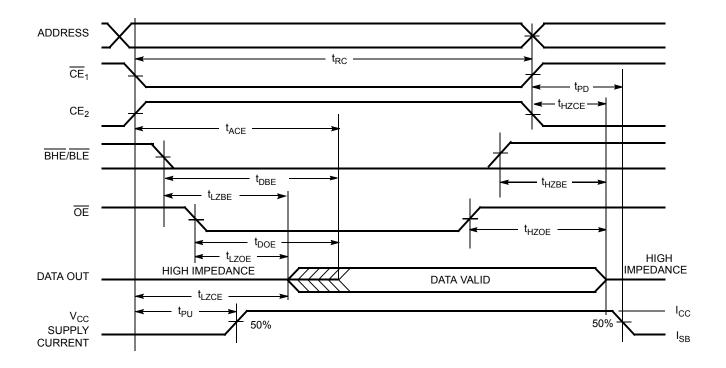

Switching Waveforms (continued)

Figure 5. Write Cycle No. 1 (WE Controlled) [25, 26, 27]

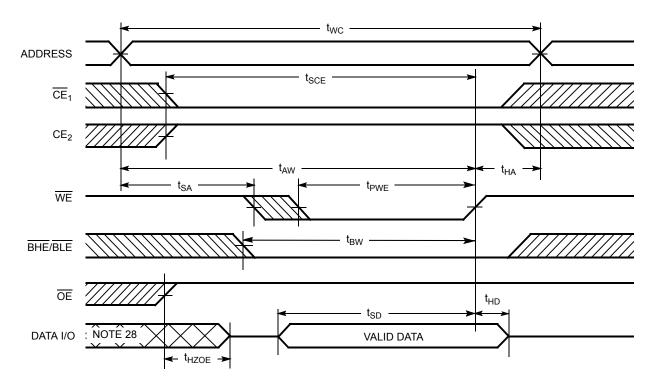

Notes

^{25.} The internal write time of the memory is defined by the overlap of WE, CE₁ = V_{IL}, BHE or BLE or both = V_{IL}, and CE₂ = V_{IH}. All signals must be active to initiate a write and any of these signals can terminate a write by going inactive. The data input setup and hold timing should be referenced to the edge of the signal that terminates the write.

^{26.} Data I/O is high impedance if $\overline{\text{OE}} = \text{V}_{\text{IH}}$.

27. If $\overline{\text{CE}}_1$ goes HIGH and $\overline{\text{CE}}_2$ goes LOW simultaneously with $\overline{\text{WE}} = \text{V}_{\text{IH}}$, the output remains in a high impedance state.

28. During this period the I/Os are in output state and input signals must not be applied.



Switching Waveforms (continued)

Figure 6. Write Cycle No. 2 ($\overline{\text{CE}}_1$ or CE_2 Controlled). [29, 30, 31]


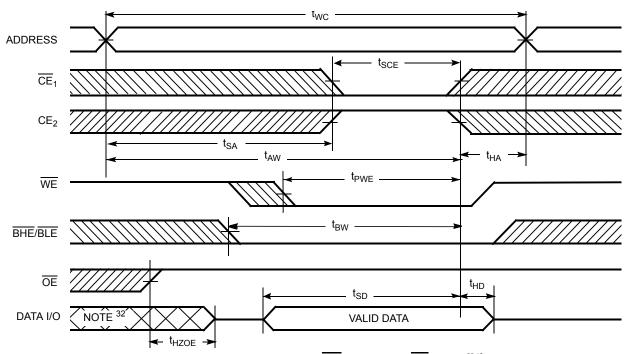


Figure 7. Write Cycle No. 3 (WE Controlled, OE LOW) [31]

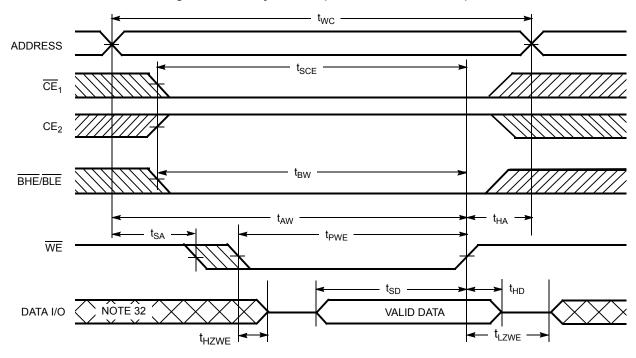

Notes

- 29. The internal write time of the memory is defined by the overlap of WE, CE₁ = V_{IL}, BHE or BLE or both = V_{IL}, and CE₂ = V_{IH}. All signals must be active to initiate a write and any of these signals can terminate a write by going inactive. The data input setup and hold timing should be referenced to the edge of the signal that terminates the write.
- 30. <u>Data I/O</u> shigh impedance if $\overline{OE} = V_{|H}$.


 31. If \overline{CE}_1 goes HIGH and \overline{CE}_2 goes LOW simultaneously with $\overline{WE} = V_{|H}$, the output remains in a high impedance state.

 32. During this period the I/Os are in output state and input signals must not be applied.



Switching Waveforms (continued)

Figure 8. Write Cycle No. 4 (BHE/BLE controlled, OE LOW) [33]

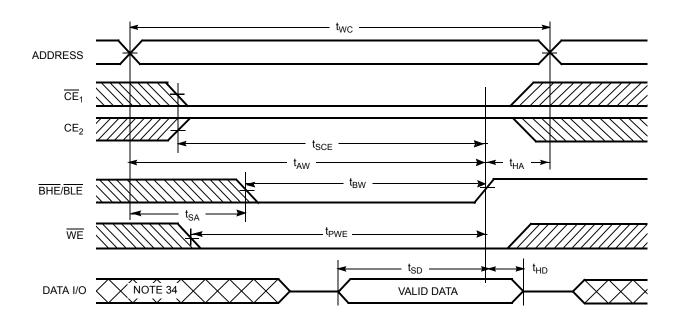



Truth Table

CE ₁	CE ₂	WE	OE	BHE	BLE	Inputs Outputs	Mode	Power
Н	X ^[35]	Х	Х	Х	Х	High Z	Deselect/power-down	Standby (I _{SB})
X ^[35]	L	Х	Х	Х	Х	High Z	Deselect/power-down	Standby (I _{SB})
X ^[35]	X ^[35]	Х	Х	Н	Н	High Z	Deselect/power-down	Standby (I _{SB})
L	Н	Н	L	L	L	Data out (I/O ₀ –I/O ₁₅)	Read	Active (I _{CC})
L	Н	Н	L	Н	L	Data out (I/O ₀ –I/O ₇); High Z (I/O ₈ –I/O ₁₅)	Read	Active (I _{CC})
L	Н	Н	L	L	Н	High Z (I/O ₀ –I/O ₇); Data out (I/O ₈ –I/O ₁₅)	Read	Active (I _{CC})
L	Н	Н	Н	L	Н	High Z	Output disabled	Active (I _{CC})
L	Н	Н	Н	Н	L	High Z	Output disabled	Active (I _{CC})
L	Н	Н	Н	L	L	High Z	Output disabled	Active (I _{CC})
L	Н	L	Х	L	L	Data in (I/O ₀ –I/O ₁₅)	Write	Active (I _{CC})
L	Н	L	Х	Н	L	Data in (I/O ₀ –I/O ₇); High Z (I/O ₈ –I/O ₁₅)	Write	Active (I _{CC})
L	Н	L	Х	L	Н	High Z (I/O ₀ –I/O ₇); Data in (I/O ₈ –I/O ₁₅)	Write	Active (I _{CC})

Note
35. The 'X' (Do not care) state for the chip enables in the truth table refers to the logic state (either HIGH or LOW). Intermediate voltage levels on these pins is not permitted.




Ordering Information

The below table lists the CY62167ELL key package features and ordering codes. The table contains only the parts that are currently available. If you do not see what you are looking for, contact your local sales representative. For more information, visit the Cypress website at www.cypress.com/products.

Speed (ns)	Ordering Code	Package Diagram	Package Type	Operating Range
45	CY62167ELL-45ZXI	51-85183	48-pin TSOP I (Pb-free)	Industrial


Ordering Code Definitions

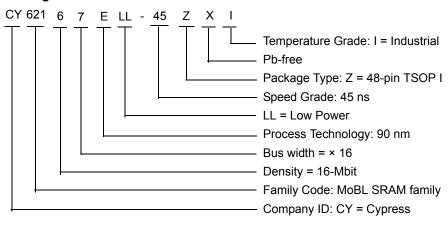



Package Diagram

Figure 9. 48-pin TSOP I (12 × 18.4 × 1.0 mm) Z48A, 51-85183

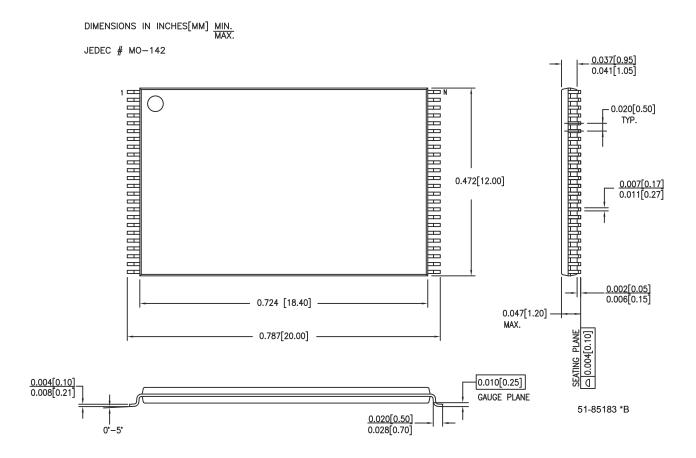



Acronyms

Acronym	Description		
BHE	byte high enable		
BLE	byte low enable		
CMOS	complementary metal oxide semiconductor		
CE	chip enable		
I/O	input/output		
OE	output enable		
SRAM	static random access memory		
TSOP	thin small outline package		
WE	write enable		

Document Conventions

Units of Measure

Symbol	Unit of Measure		
°C	degree Celsius		
MHz	Mega Hertz		
μA	micro Amperes		
mA	milli Amperes		
mm	milli meter		
ns	nano seconds		
Ω	ohms		
%	percent		
pF	pico Farad		
V	Volts		
W	Watts		



Document History Page

Rev.	ECN No.	Issue Date	Orig. of Change	Description of Change
**	1103145	See ECN	VKN	New Data Sheet
*A	1138903	See ECN	VKN	Converted from preliminary to final Changed $I_{CC(max)}$ spec from 2.8 mA to 4.0 mA for f=1 MHz Changed $I_{CC(typ)}$ spec from 22 mA to 25 mA for f=f _{max} Changed $I_{CC(max)}$ spec from 25 mA to 30 mA for f=f _{max} Added footnote# 8 related to V_{IL} Changed I_{CCDR} spec from 10 μ A to 12 μ A Added footnote# 14 related to AC timing parameters
*B	2934385	06/03/10	VKN	Included BHE, BLE in I _{SB2} , I _{CCDR} test conditions to reflect byte power down feature Added footnote #35 related to chip enable Updated package diagram Updated template
*C	3279426	06/10/2011	RAME	Removed the Note "For best practice recommendations, refer to the Cypress application note AN1064, SRAM System Guidelines." in page 1 and its reference in Functional Description. Updated Switching Characteristics (changed the Min value of t _{LZBE} parameter). Updated in new template.



Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

Automotive cypress.com/go/automotive Clocks & Buffers cypress.com/go/clocks Interface cypress.com/go/interface cypress.com/go/powerpsoc cypress.com/go/powerpsoc

cypress.com/go/plc
Memory cypress.com/go/memory
Optical & Image Sensing cypress.com/go/image
PSoC cypress.com/go/psoc
Touch Sensing cypress.com/go/touch
USB Controllers cypress.com/go/USB
Wireless/RF cypress.com/go/wireless

PSoC Solutions

psoc.cypress.com/solutions PSoC 1 | PSoC 3 | PSoC 5

© Cypress Semiconductor Corporation, 2007-2011. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

Document Number: 001-15607 Rev. *C Revise

All products and company names mentioned in this document may be the trademarks of their respective holders

Revised June 10, 2011 Page 17 of 17