

# **FQD20N06LE / FQU20N06LE**

## **60V LOGIC N-Channel MOSFET**


### **General Description**

These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for low voltage applications such as automotive, DC/DC converters, and high efficiency switching for power management in portable and battery operated products.

### **Features**

- 17.2A, 60V,  $R_{DS(on)} = 0.06\Omega$  @  $V_{GS} = 10V$
- Low gate charge ( typical 9.5 nC)
- Low  $C_{RSS}$  ( typical 35 pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- 150°C maximum junction temperature rating
- Low level gate drive requirements allowing direct operation from logic drivers
- Built-in ESD Protection Diode

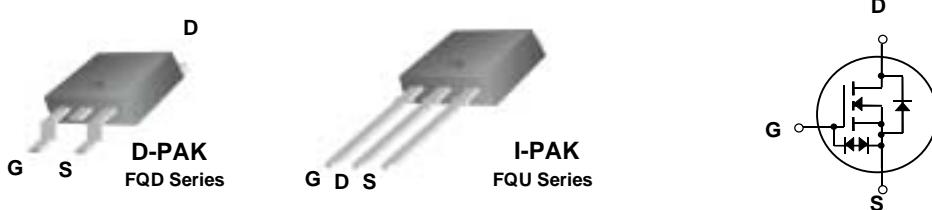

### **Absolute Maximum Ratings**

$T_C = 25^\circ C$  unless otherwise noted

Symbol	Parameter	FQD20N06LE / FQU20N06LE	Units
$V_{DSS}$	Drain-Source Voltage	60	V
$I_D$	Drain Current - Continuous ( $T_C = 25^\circ C$ )	17.2	A
	- Continuous ( $T_C = 100^\circ C$ )	10.9	A
$I_{DM}$	Drain Current - Pulsed	(Note 1)	A
$V_{GSS}$	Gate-Source Voltage	$\pm 20$	V
$E_{AS}$	Single Pulsed Avalanche Energy	(Note 2)	mJ
$I_{AR}$	Avalanche Current	(Note 1)	A
$E_{AR}$	Repetitive Avalanche Energy	(Note 1)	mJ
$dv/dt$	Peak Diode Recovery $dv/dt$	(Note 3)	V/ns
$P_D$	Power Dissipation ( $T_A = 25^\circ C$ ) *	2.5	W
	Power Dissipation ( $T_C = 25^\circ C$ )	38	W
	- Derate above $25^\circ C$	0.30	W/ $^\circ C$
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to +150	$^\circ C$
$T_L$	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	$^\circ C$


### **Thermal Characteristics**

Symbol	Parameter	Typ	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	--	3.28	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient *	--	50	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	--	110	$^\circ C/W$


\* When mounted on the minimum pad size recommended (PCB Mount)

Electrical Characteristics		$T_C = 25^\circ\text{C}$ unless otherwise noted				
Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
<b>Off Characteristics</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$	60	--	--	V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu\text{A}$ , Referenced to $25^\circ\text{C}$	--	0.06	--	$\text{V}/^\circ\text{C}$
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 60 \text{ V}$ , $V_{\text{GS}} = 0 \text{ V}$	--	--	1	$\mu\text{A}$
		$V_{\text{DS}} = 48 \text{ V}$ , $T_C = 125^\circ\text{C}$	--	--	10	$\mu\text{A}$
$I_{\text{GSSF}}$	Gate-Body Leakage Current, Forward	$V_{\text{GS}} = 20 \text{ V}$ , $V_{\text{DS}} = 0 \text{ V}$	--	--	10	$\mu\text{A}$
$I_{\text{GSSR}}$	Gate-Body Leakage Current, Reverse	$V_{\text{GS}} = -20 \text{ V}$ , $V_{\text{DS}} = 0 \text{ V}$	--	--	-10	$\mu\text{A}$
<b>On Characteristics</b>						
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}$ , $I_D = 250 \mu\text{A}$	1.0	--	2.5	V
$R_{\text{DS(on)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}} = 10 \text{ V}$ , $I_D = 8.6 \text{ A}$	--	0.046	0.06	$\Omega$
		$V_{\text{GS}} = 5 \text{ V}$ , $I_D = 8.6 \text{ A}$	--	0.057	0.075	$\Omega$
$g_{\text{FS}}$	Forward Transconductance	$V_{\text{DS}} = 25 \text{ V}$ , $I_D = 8.6 \text{ A}$ (Note 4)	--	11	--	S
<b>Dynamic Characteristics</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}} = 25 \text{ V}$ , $V_{\text{GS}} = 0 \text{ V}$ , $f = 1.0 \text{ MHz}$	--	506	665	pF
$C_{\text{oss}}$	Output Capacitance		--	175	230	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		--	35	45	pF
<b>Switching Characteristics</b>						
$t_{\text{d(on)}}$	Turn-On Delay Time	$V_{\text{DD}} = 30 \text{ V}$ , $I_D = 10.5 \text{ A}$ , $R_G = 25 \Omega$	--	13	39	ns
$t_r$	Turn-On Rise Time		--	220	453	ns
$t_{\text{d(off)}}$	Turn-Off Delay Time		--	45	103	ns
$t_f$	Turn-Off Fall Time		--	100	214	ns
$Q_g$	Total Gate Charge	$V_{\text{DS}} = 48 \text{ V}$ , $I_D = 21 \text{ A}$ , $V_{\text{GS}} = 5 \text{ V}$	--	9.5	13	nC
$Q_{\text{gs}}$	Gate-Source Charge		--	2.5	--	nC
$Q_{\text{gd}}$	Gate-Drain Charge		--	5.5	--	nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
$I_S$	Maximum Continuous Drain-Source Diode Forward Current	--	--	17.2	--	A
$I_{\text{SM}}$	Maximum Pulsed Drain-Source Diode Forward Current	--	--	68.8	--	A
$V_{\text{SD}}$	Drain-Source Diode Forward Voltage	$V_{\text{GS}} = 0 \text{ V}$ , $I_S = 17.2 \text{ A}$	--	--	1.5	V
$t_{\text{rr}}$	Reverse Recovery Time	$V_{\text{GS}} = 0 \text{ V}$ , $I_F = 21 \text{ A}$ , $dI_F / dt = 100 \text{ A}/\mu\text{s}$	--	64	--	ns
$Q_{\text{rr}}$	Reverse Recovery Charge		--	105	--	nC
<b>Notes:</b>						
1.	Repetitive Rating : Pulse width limited by maximum junction temperature					
2.	$L = 670 \mu\text{H}$ , $I_{AS} = 17.2 \text{ A}$ , $V_{DD} = 25 \text{ V}$ , $R_G = 25 \Omega$ . Starting $T_J = 25^\circ\text{C}$					
3.	$I_{SD} \leq 21 \text{ A}$ , $dI/dt \leq 300 \text{ A}/\mu\text{s}$ , $V_{DD} \leq \text{BV}_{\text{DSS}}$ . Starting $T_J = 25^\circ\text{C}$					
4.	Pulse Test : Pulse width $\leq 300 \mu\text{s}$ , Duty cycle $\leq 2\%$					
5.	Essentially independent of operating temperature					


## Typical Characteristics

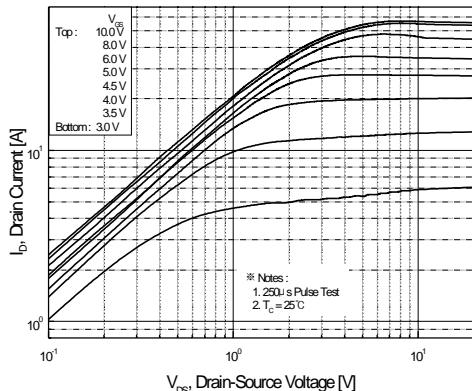


**Figure 1. On-Region Characteristics**

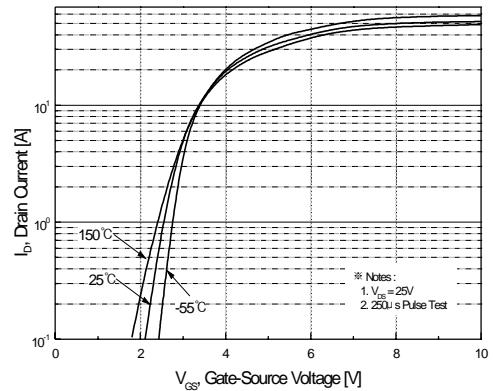


**Figure 2. Transfer Characteristics**

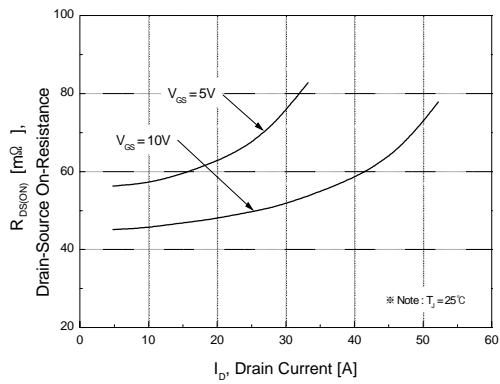


**Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage**

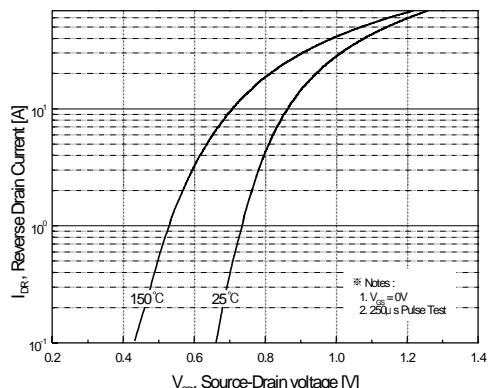

**Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature**

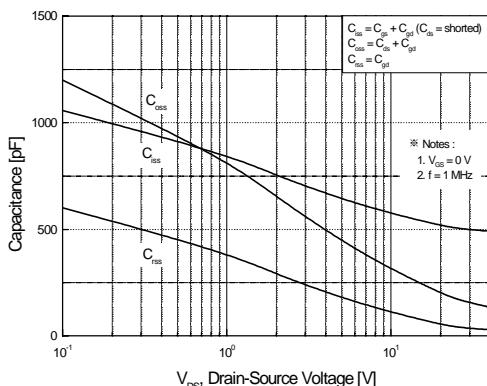

**Figure 5. Capacitance Characteristics**

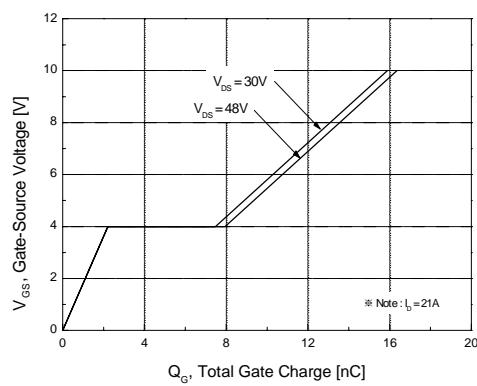

**Figure 6. Gate Charge Characteristics**

## Typical Characteristics (Continued)

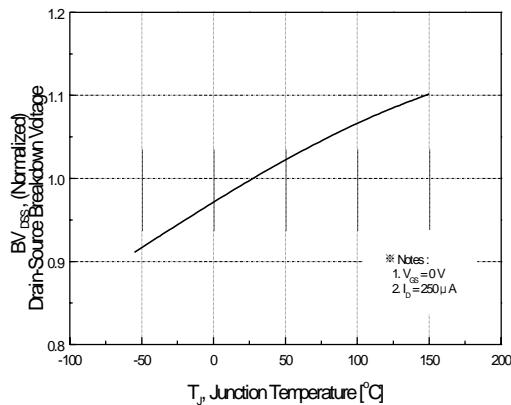


Figure 7. Breakdown Voltage Variation  
vs. Temperature

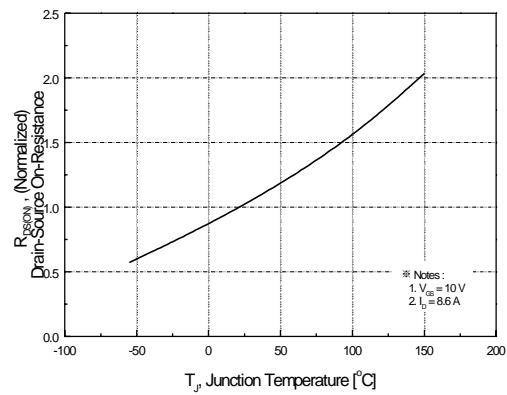


Figure 8. On-Resistance Variation  
vs. Temperature

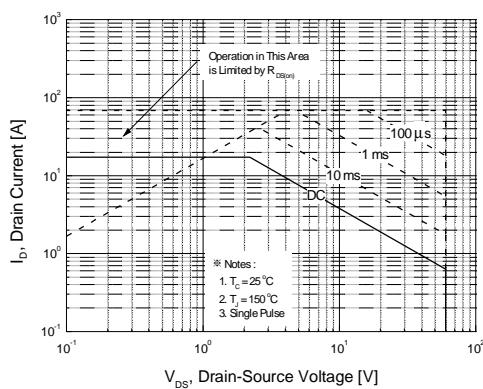


Figure 9. Maximum Safe Operating Area

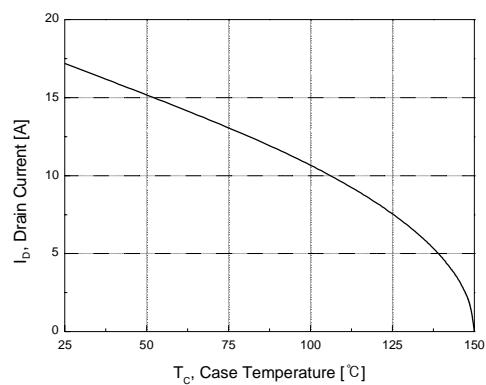


Figure 10. Maximum Drain Current  
vs. Case Temperature



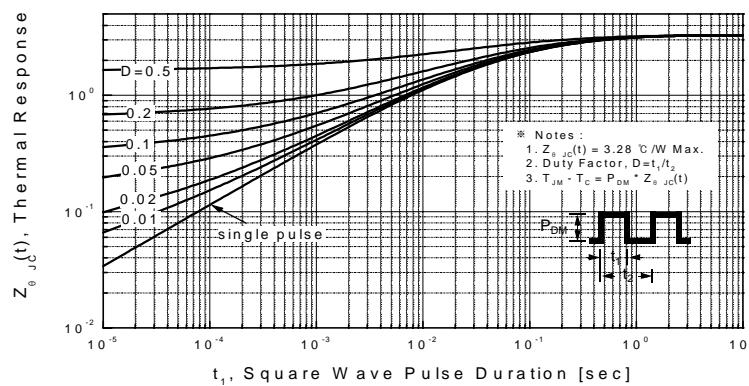


Figure 11. Transient Thermal Response Curve


Gate Charge Test Circuit & Waveform

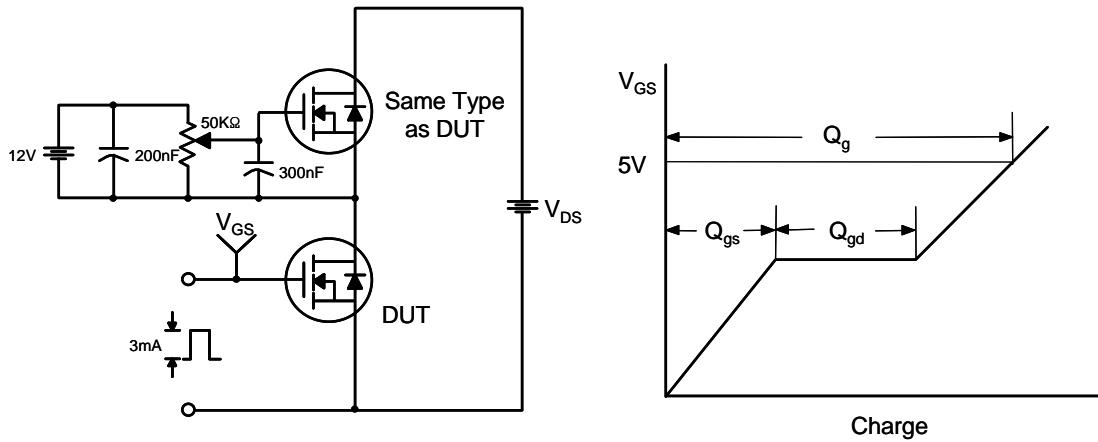


Resistive Switching Test Circuit & Waveforms

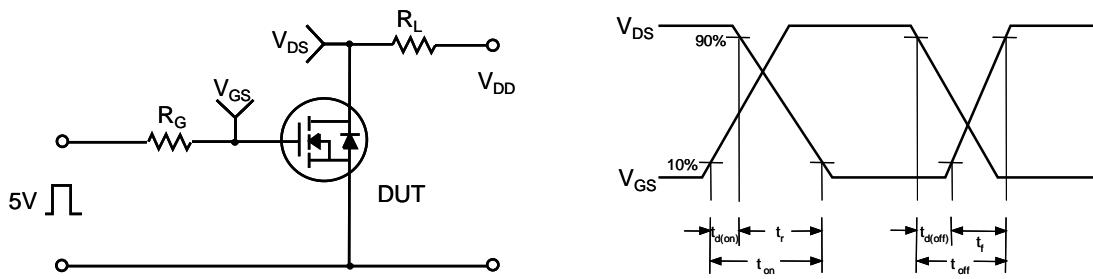

Unclamped Inductive Switching Test Circuit & Waveforms

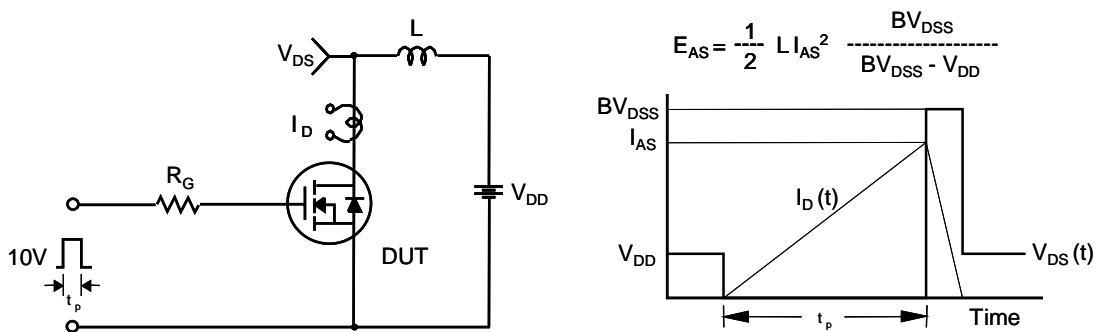


Peak Diode Recovery dv/dt Test Circuit & Waveforms

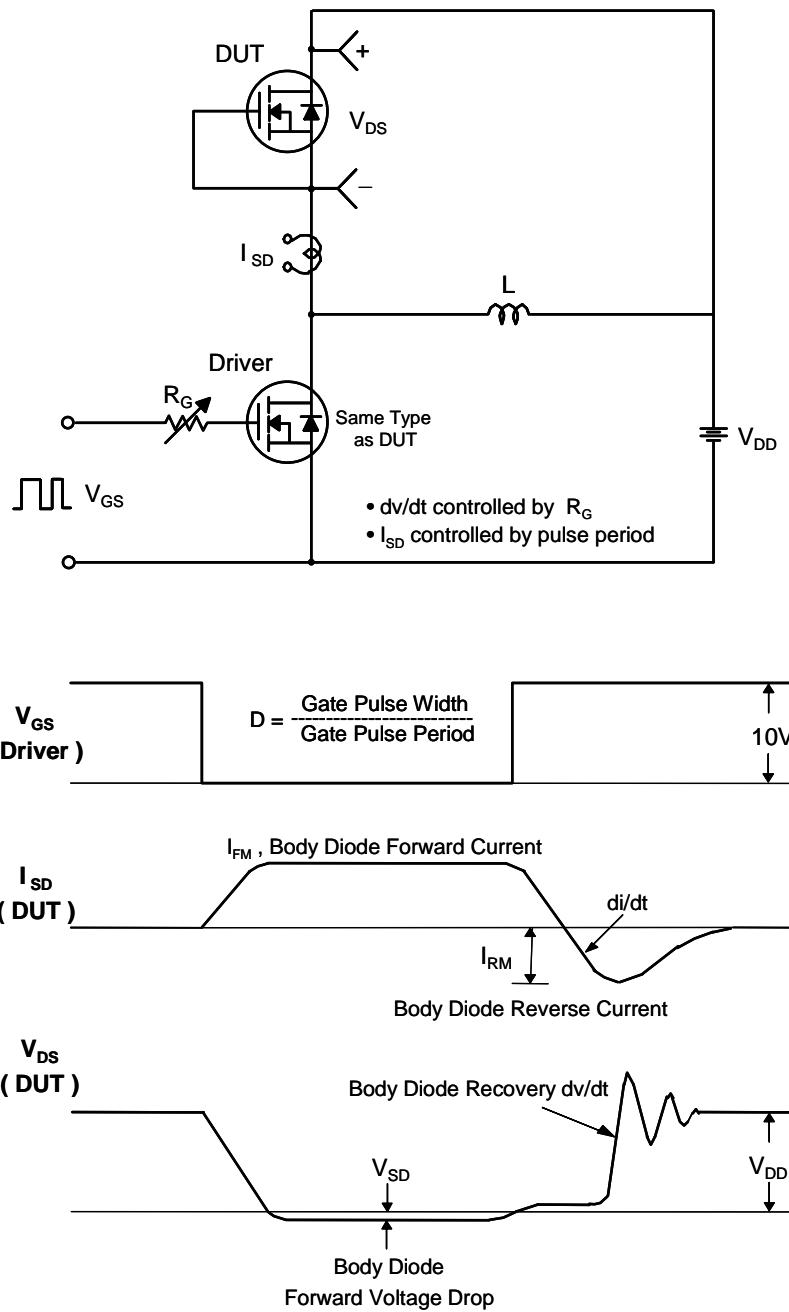



## Package Dimensions

DPAK

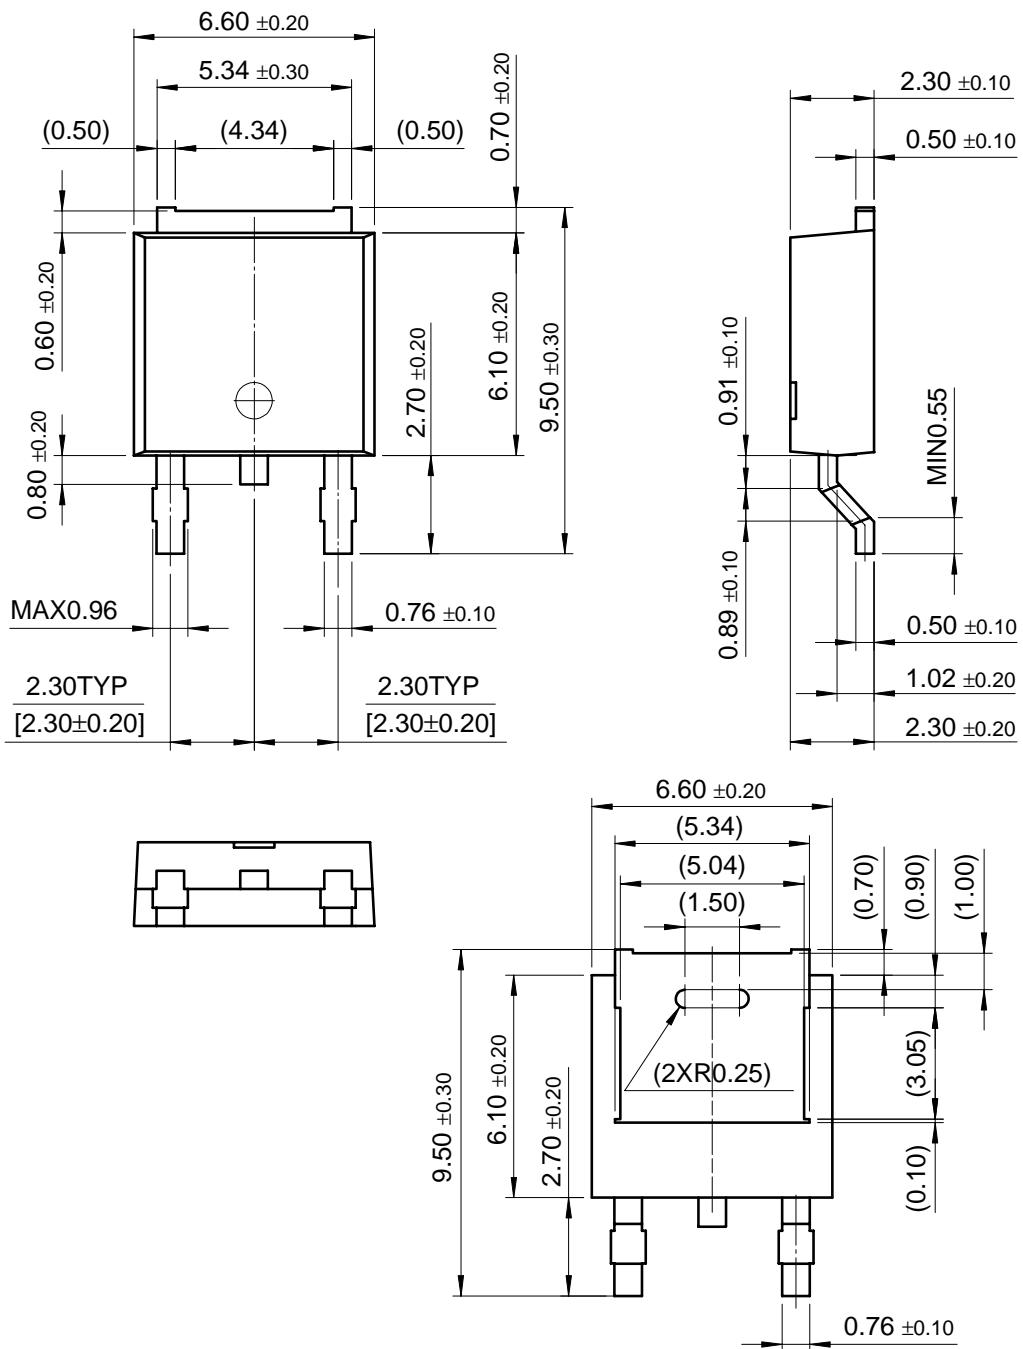

**Package Dimensions** (Continued)

**IPAK**

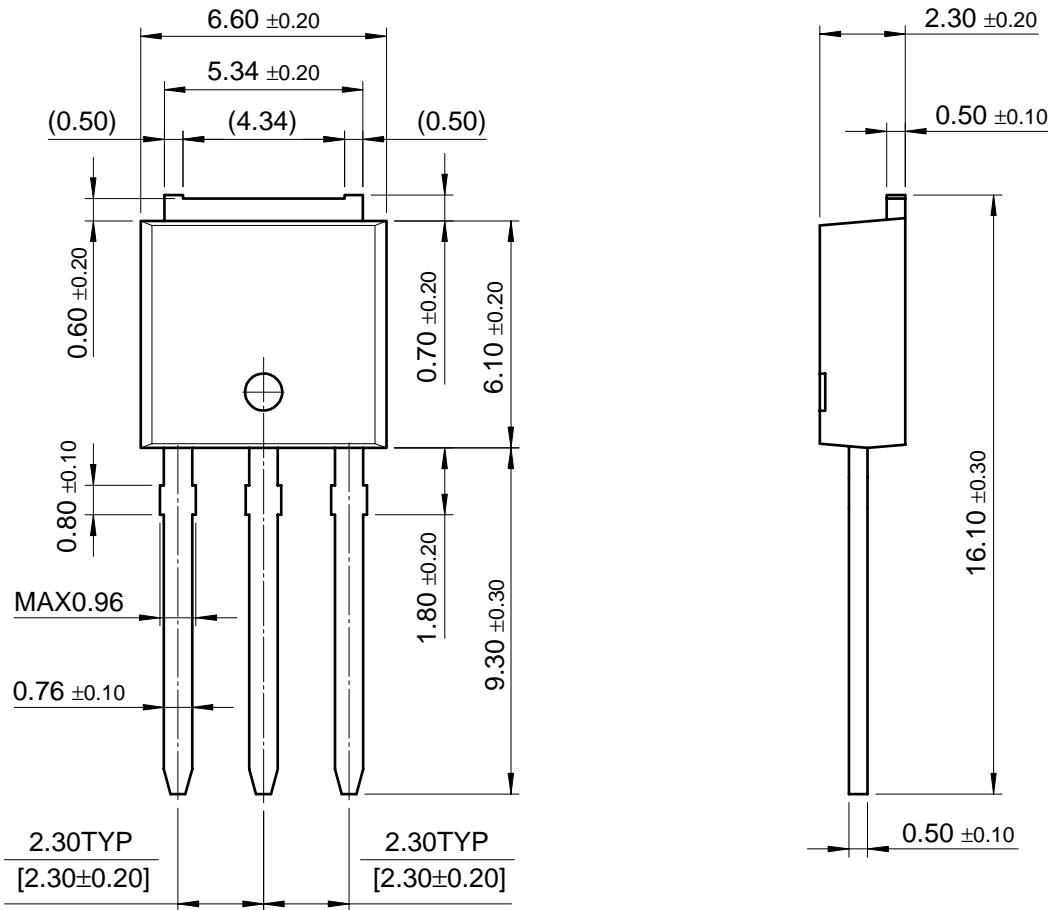

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE <sup>TM</sup>	FAST <sup>®</sup>	OPTOPLANAR <sup>™</sup>	SuperSOT <sup>™-3</sup>
Bottomless <sup>™</sup>	FASTR <sup>™</sup>	PACMAN <sup>™</sup>	SuperSOT <sup>™-6</sup>
CoolFET <sup>™</sup>	FRFET <sup>™</sup>	POP <sup>™</sup>	SuperSOT <sup>™-8</sup>
CROSSVOLT <sup>™</sup>	GlobalOptoisolator <sup>™</sup>	PowerTrench <sup>®</sup>	SyncFET <sup>™</sup>
DenseTrench <sup>™</sup>	GTO <sup>™</sup>	QFET <sup>™</sup>	TinyLogic <sup>™</sup>
DOME <sup>™</sup>	HiSeC <sup>™</sup>	QS <sup>™</sup>	UHC <sup>™</sup>
EcoSPARK <sup>™</sup>	ISOPLANAR <sup>™</sup>	QT Optoelectronics <sup>™</sup>	UltraFET <sup>®</sup>
E <sup>2</sup> CMOS <sup>™</sup>	LittleFET <sup>™</sup>	Quiet Series <sup>™</sup>	VCX <sup>™</sup>
EnSigna <sup>™</sup>	MicroFET <sup>™</sup>	SLIENT SWITCHER <sup>®</sup>	
FACT <sup>™</sup>	MICROWIRE <sup>™</sup>	SMART START <sup>™</sup>	
FACT Quiet Series <sup>™</sup>	OPTOLOGIC <sup>™</sup>	Stealth <sup>™</sup>	

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.