

# signetics

DUAL 2-WIDE 2-INPUT  
AND-OR-INVERT GATES

S54H50

S54H51


N74H50

N74H51

S54H50-A,F,W • S54H51-A,F,W • N74H50-A,F • N74H51-A,F

DIGITAL 54/74 TTL SERIES

#### SCHEMATIC (each gate)

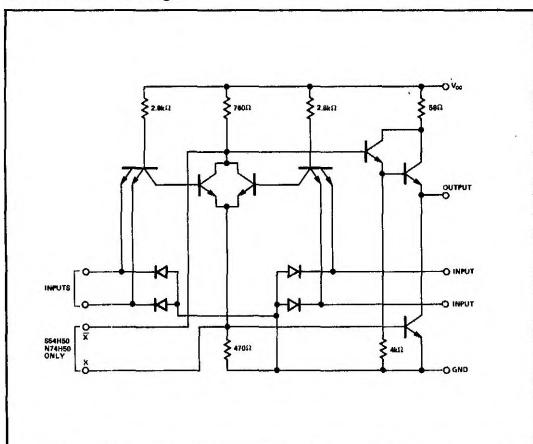


#### NOTES:


1. Component values are nominal.
2. Both expander inputs are used simultaneously for expanding.
3. If expander is not used leave X and Y pins open.
4. Expander inputs X and Y are functional on the S54H50 and N74H50 circuits only. Make no external connection to X and Y pins of the S54H51 and N74H51.
5. A total of four S54H60/N74H60 expander gates or one S54H62/N74H62 expander gate may be connected to the expander inputs.

#### PIN CONFIGURATIONS

##### W PACKAGE

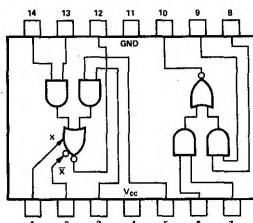

##### A,F PACKAGE

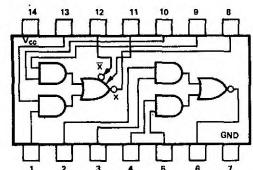

#### RECOMMENDED OPERATING CONDITIONS

|                                                                       | MIN  | NOM | MAX  | UNIT |
|-----------------------------------------------------------------------|------|-----|------|------|
| Supply Voltage $V_{CC}$ : S54H50, S54H51 Circuits                     | 4.5  | 5   | 5.5  | V    |
| Normalized Fan-Out from each Output, N                                | 4.75 | 5   | 5.25 | V    |
| Operating Free-Air Temperature Range, $T_A$ : S54H50, S54H51 Circuits | -55  | 25  | 125  | °C   |
| N74H50, N74H51 Circuits                                               | 0    | 25  | 70   | °C   |

#### ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

| PARAMETER    | TEST CONDITIONS*                                                                                             |                                                         | MIN                                                | TYP† | MAX | UNIT                |
|--------------|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|----------------------------------------------------|------|-----|---------------------|
|              | $V_{CC} = \text{MIN}$                                                                                        | $V_{CC} = \text{MAX}$                                   |                                                    |      |     |                     |
| $V_{in(1)}$  | Logical 1 input voltage required at both input terminals of either AND section to ensure logical 0 at output | $V_{CC} = \text{MIN}$                                   | 2                                                  |      |     | V                   |
| $V_{in(0)}$  | Logical 0 input voltage required at one input terminal of each AND section to ensure logical 1 at output     | $V_{CC} = \text{MIN}$                                   |                                                    | 0.8  |     | V                   |
| $V_{out(1)}$ | Logical 1 output voltage                                                                                     | $V_{CC} = \text{MIN}$ ,<br>$I_{load} = -500\mu\text{A}$ | $V_{in} = 0.8\text{V}$ ,                           | 2.4  |     | V                   |
| $V_{out(0)}$ | Logical 0 output voltage                                                                                     | $V_{CC} = \text{MIN}$ ,<br>$I_{sink} = 20\text{mA}$     | $V_{in} = 2\text{V}$ ,                             |      | 0.4 | V                   |
| $I_{in(0)}$  | Logical 0 level input current (each input)                                                                   | $V_{CC} = \text{MAX}$ ,                                 | $V_{in} = 0.4\text{V}$                             |      | -2  | mA                  |
| $I_{in(1)}$  | Logical 1 level input current (each input)                                                                   | $V_{CC} = \text{MAX}$ ,<br>$V_{CC} = \text{MAX}$ ,      | $V_{in} = 2.4\text{V}$ ,<br>$V_{in} = 5.5\text{V}$ |      | 50  | $\mu\text{A}$<br>mA |

# DIGITAL 54/74 TTL SERIES ■ S54H50, S54H51, N74H50, N74H51

## ELECTRICAL CHARACTERISTICS (Cont'd)

| PARAMETER                                     | TEST CONDITIONS                      | MIN | TYP  | MAX  | UNIT |
|-----------------------------------------------|--------------------------------------|-----|------|------|------|
| $I_{OS}$<br>Short circuit output current**    | $V_{CC} = \text{MAX}$                | -40 |      | -100 | mA   |
| $I_{CC(0)}$<br>Logical 0 level supply current | $V_{CC} = \text{MAX}, V_{in} = 4.5V$ |     | 15.2 | 24   | mA   |
| $I_{CC(1)}$<br>Logical 1 level supply current | $V_{CC} = \text{MAX}, V_{in} = 0$    |     | 8.2  | 12.8 | mA   |

ELECTRICAL CHARACTERISTICS (S54H50 circuits only) using expander inputs,  $V_{CC} = 4.5V, T_A = -55^{\circ}\text{C}$

| PARAMETER                                                  | TEST CONDITIONS                                                           | MIN | TYP | MAX   | UNIT |
|------------------------------------------------------------|---------------------------------------------------------------------------|-----|-----|-------|------|
| $I_{in\bar{X}}$<br>Expander-node input current             | $V_{\bar{X}} = 1.4V$                                                      |     |     | -5.85 | mA   |
| $V_{BE(Q)}$<br>Base-emitter voltage of output transistor Q | $I_{sink} = 20\text{mA}, I_1 = 700\mu\text{A}, R_1 = 0$                   |     |     | 1     | V    |
| $V_{out(1)}$<br>Logical 1 output voltage                   | $I_{load} = -500\mu\text{A}, I_1 = 320\mu\text{A}, I_2 = -320\mu\text{A}$ | 2.4 |     |       | V    |
| $V_{out(0)}$<br>Logical 0 output voltage                   | $I_{sink} = 20\text{mA}, I_1 = 470\mu\text{A}, R_1 = 68\Omega$            |     |     | 0.4   | V    |

ELECTRICAL CHARACTERISTICS (N74H50 circuits only) using expander inputs,  $V_{CC} = 4.5V, T_A = 0^{\circ}\text{C}$

| PARAMETER                                                  | TEST CONDITIONS                                                           | MIN | TYP | MAX  | UNIT |
|------------------------------------------------------------|---------------------------------------------------------------------------|-----|-----|------|------|
| $I_{in\bar{X}}$<br>Expander-node input current             | $V_{\bar{X}} = 1.4V$                                                      |     |     | -6.3 | mA   |
| $V_{BE(Q)}$<br>Base-emitter voltage of output transistor Q | $I_{sink} = 20\text{mA}, I_1 = 1.1\text{mA}, R_1 = 0$                     |     |     | 1    | V    |
| $V_{out(1)}$<br>Logical 1 output voltage                   | $I_{load} = -500\mu\text{A}, I_1 = 570\mu\text{A}, I_2 = -570\mu\text{A}$ | 2.4 |     |      | V    |
| $V_{out(0)}$<br>Logical 0 output voltage                   | $I_{sink} = 20\text{mA}, I_1 = 600\mu\text{A}, R_1 = 63\Omega$            |     |     | 0.4  | V    |

SWITCHING CHARACTERISTICS,  $V_{CC} = 5V, T_A = 25^{\circ}\text{C}, N = 10$ , expander pins are open

| PARAMETER                                              | TEST CONDITIONS                      | MIN | TYP | MAX | UNIT |
|--------------------------------------------------------|--------------------------------------|-----|-----|-----|------|
| $t_{pd0}$<br>Propagation delay time to logical 0 level | $C_L = 25\text{pF}, R_L = 280\Omega$ | 6.2 | 11  |     | ns   |
| $t_{pd1}$<br>Propagation delay time to logical 1 level | $C_L = 25\text{pF}, R_L = 280\Omega$ | 6.8 | 11  |     | ns   |

SWITCHING CHARACTERISTICS, (S54H50/N74H50 circuits only),  $V_{CC} = 5V, T_A = 25^{\circ}\text{C}, N = 10, C_X = 15\text{ pF}$

| PARAMETER                                              | TEST CONDITIONS                      | MIN | TYP | MAX | UNIT |
|--------------------------------------------------------|--------------------------------------|-----|-----|-----|------|
| $t_{pd0}$<br>Propagation delay time to logical 0 level | $C_L = 25\text{pF}, R_L = 280\Omega$ |     | 7.4 |     | ns   |
| $t_{pd1}$<br>Propagation delay time to logical 1 level | $C_L = 25\text{pF}, R_L = 280\Omega$ |     | 11  |     | ns   |

\* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type. Expander pins are open.

\*\* Not more than one output should be shorted at a time, and duration of short circuit test should not exceed 1 second.

† All typical values are at  $V_{CC} = 5V, T_A = 25^{\circ}\text{C}$ .