SGDS008B - MAY 1998 - REVISED APRIL 2008

- **Qualified for Automotive Applications**
- Inputs Are TTL-Voltage Compatible
- **EPIC™** (Enhanced-Performance Implanted **CMOS) Process**
- Latch-Up Performance Exceeds 250 mA Per **JESD 17**
- **ESD Protection Exceeds 2000 V Per** MIL-STD-883. Method 3015: Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)

#### D OR PW PACKAGE (TOP VIEW) 1CLR 13 2CLR 1D **1**2 1CLK 3 12 ¶ 2D 1PRE 14 11 2CLK 10 2PRE 1Q 🛮 5 1Q 6 9 2Q 8 🛮 2 🖸 GND L

### description

The SN74AHCT74Q is a dual positive-edge-triggered D-type flip-flop.

A low level at the preset (PRE) or clear (CLR) inputs sets or resets the outputs, regardless of the levels of the other inputs. When PRE and CLR are inactive (high), data at the data (D) input meeting the setup time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of the clock pulse. Following the hold-time interval, data at the D input can be changed without affecting the levels at the outputs.

### ORDERING INFORMATION<sup>†</sup>

TA	PACKAGE <sup>‡</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING	
-40°C to 125°C	SOIC - D	Tape and reel	SN74AHCT74QDRQ1	AHCT74Q	
-40 C to 125 C	TSSOP - PW	Tape and reel	SN74AHCT74QPWRQ1	HB74Q	

<sup>†</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at http://www.ti.com.

### **FUNCTION TABLE**

	INP	OUTI	PUTS		
PRE	CLR	CLK	D	Q	Q
L	Н	Х	Χ	Н	L
Н	L	X	Χ	L	Н
L	L	X	Χ	Н§	н§
Н	Н	$\uparrow$	Н	Н	L
Н	Н	$\uparrow$	L	L	Н
Н	Н	L	Χ	$Q_0$	$\overline{Q}_0$

<sup>§</sup> This configuration is unstable; that is, it does not persist when PRE or CLR returns to its inactive (high) level.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


EPIC is a trademark of Texas Instruments



<sup>‡</sup>Package drawings, thermal data, and symbolization are available at http://www.ti.com/packaging.


SGDS008B - MAY 1998 - REVISED APRIL 2008

## logic symbol†



<sup>&</sup>lt;sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

### logic diagram, each flip-flop (positive logic)

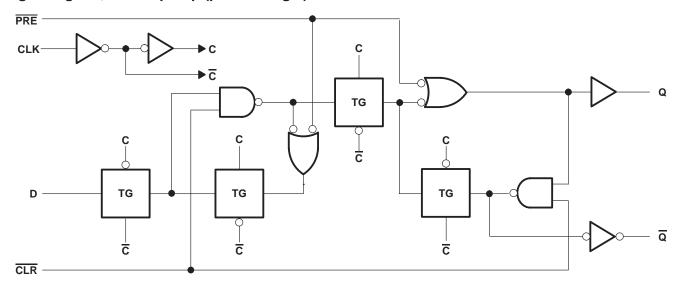

SGDS008B - MAY 1998 - REVISED APRIL 2008

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)	–0.5 V to 7 V
Output voltage range, V <sub>O</sub> (see Note 1)	
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0)	–20 mA
Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{CC}$ )	
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	
Continuous current through V <sub>CC</sub> or GND	
Package thermal impedance, θ <sub>JA</sub> (see Note 2): D package	
	113°C/W
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### recommended operating conditions (see Note 3)

		MIN	MAX	UNIT
VCC	Supply voltage	4.5	5.5	V
$V_{IH}$	High-level input voltage	2		V
V <sub>IL</sub>	Low-level input voltage		8.0	V
VI	Input voltage	0	5.5	V
VO	Output voltage	0	VCC	V
IOH	High-level output current		-8	mA
loL	Low-level output current		8	mA
Δt/Δν	Input transition rise or fall rate		20	ns/V
TA	Operating free-air temperature	-40	125	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST COMPITIONS	V	T <sub>A</sub> = 25°C			MINI	MAY	LIMIT
PARAMETER	TEST CONDITIONS	VCC	MIN	TYP	MAX	MIN	MAX	UNIT
V	$I_{OH} = -50 \mu A$	45.1/	4.4	4.5		4.4		
Voн	$I_{OH} = -8 \text{ mA}$	4.5 V	3.94			3.8		V
.,	I <sub>OL</sub> = 50 μA	45.77			0.1		0.1	.,
VOL	I <sub>OL</sub> = 8 mA	4.5 V			0.36		0.44	V
lj	V <sub>I</sub> = 5.5 V or GND	0 V to 5.5 V			±0.1		±1	μΑ
ICC	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			2		20	μΑ
Δl <sub>CC</sub> ‡	One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND	5.5 V	·		1.35		1.5	mA
C <sub>i</sub>	$V_I = V_{CC}$ or GND	5 V		2	10			pF

<sup>&</sup>lt;sup>‡</sup> This is the increase in supply current for each input at one of the specified TTL voltage levels rather than 0 V or V<sub>CC</sub>.



NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>2.</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

SGDS008B - MAY 1998 - REVISED APRIL 2008

## timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)

	24244552		T <sub>A</sub> = 2	25°C				
	PARAMETER	MIN	MAX	MIN	MAX	UNIT		
	Police desertion	PRE or CLR low	5		5			
t <sub>W</sub>	Pulse duration	CLK	5		5		ns	
	Setur time hefere CLV <sup>↑</sup>	Data	5		5			
t <sub>su</sub>	Setup time before CLK↑	PRE or CLR inactive	3.5		3.5		ns	
th	Hold time, data after CLK↑		0		0		ns	

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	TO LOAD		T <sub>A</sub> = 25°C			BAINI BAAY	MAY	
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	UNIT
			C <sub>L</sub> = 15 pF	100	160		80		N 41 1-
f <sub>max</sub>			C <sub>L</sub> = 50 pF	80	140		65		MHz
<sup>t</sup> PLH	PRE or CLR	Q or Q	C 45 pF		7.6	10.4	1	12	20
<sup>t</sup> PHL	PRE OF CLR	Q or Q	C <sub>L</sub> = 15 pF		7.6	10.4	1	12	ns
<sup>t</sup> PLH	CLIV	Q or Q	0. 45.5		5.8	7.8	1	9	
<sup>t</sup> PHL	CLK	Q or Q	C <sub>L</sub> = 15 pF		5.8	7.8	1	9	ns
<sup>t</sup> PLH	PRE or CLR	Q or $\overline{\mathbb{Q}}$	0. 50 = 5		8.1	11.4	1	13	
<sup>t</sup> PHL	PRE OF CLR	Q or Q	C <sub>L</sub> = 50 pF		8.1	11.4	1	13	ns
<sup>t</sup> PLH	CLK	Q or $\overline{\mathbb{Q}}$	C <sub>L</sub> = 50 pF		6.3	8.8	1	10	ns
<sup>t</sup> PHL	CLK	QUQ	OL = 30 pr		6.3	8.8	1	10	115

## noise characteristics, $V_{CC} = 5 \text{ V}$ , $C_L = 50 \text{ pF}$ , $T_A = 25^{\circ}\text{C}$ (see Note 4)

	PARAMETER					
V <sub>OL(P)</sub>	Quiet output, maximum dynamic V <sub>OL</sub>		0.8	V		
V <sub>OL(V)</sub>	Quiet output, minimum dynamic V <sub>OL</sub>		-0.8	V		
V <sub>OH(V)</sub>	Quiet output, minimum dynamic V <sub>OH</sub>	4		V		
VIH(D)	High-level dynamic input voltage	2		V		
V <sub>IL(D)</sub>	Low-level dynamic input voltage		0.8	V		


NOTE 4: Characteristics are for surface-mount packages only.

### operating characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

PARAMETER		TEST CO	ONDITIONS	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance	No load,	f = 1 MHz	32	pF

SGDS008B - MAY 1998 - REVISED APRIL 2008

### PARAMETER MEASUREMENT INFORMATION

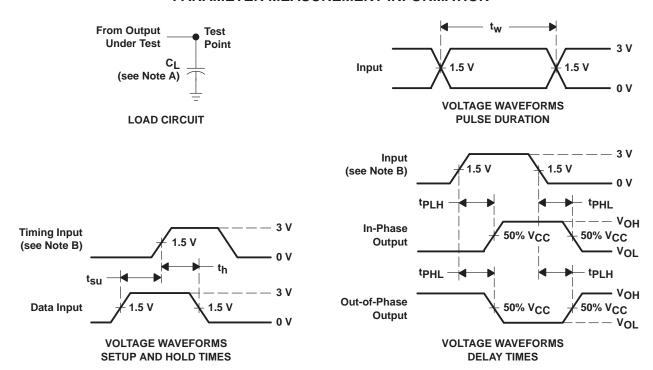

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_0 = 50 \Omega$ ,  $t_f = 3 \text{ ns}$ .
- C. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

### PACKAGE OPTION ADDENDUM

www.ti.com 26-Mar-2010

### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN74AHCT74QDRG4Q1	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHCT74QDRQ1	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHCT74QPWRG4Q1	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHCT74QPWRQ1	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## D (R-PDSO-G14)

### PLASTIC SMALL OUTLINE




NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.



PW (R-PDSO-G14)

### PLASTIC SMALL OUTLINE

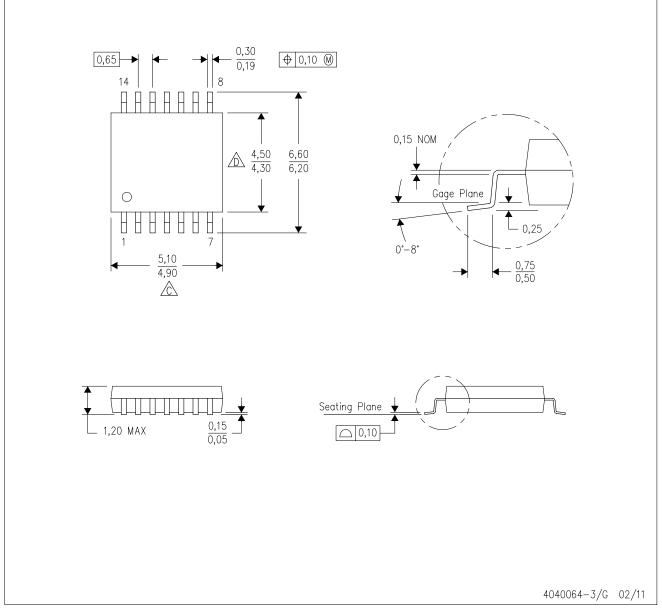


NOTES:

- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
- E. Falls within JEDEC MO-153



## PW (R-PDSO-G14)

## PLASTIC SMALL OUTLINE

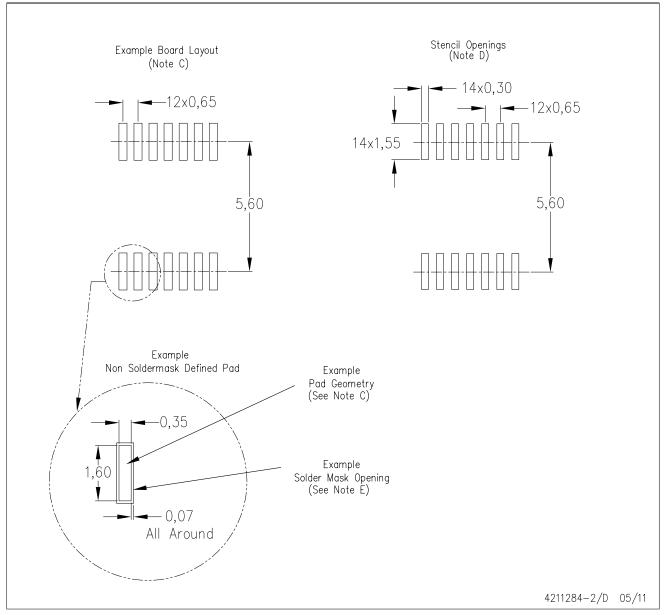

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Audio	www.ti.com/audio	Communications and Telecom	www.ti.com/communications
Amplifiers	amplifier.ti.com	Computers and Peripherals	www.ti.com/computers
Data Converters	dataconverter.ti.com	Consumer Electronics	www.ti.com/consumer-apps
DLP® Products	www.dlp.com	Energy and Lighting	www.ti.com/energy
DSP	dsp.ti.com	Industrial	www.ti.com/industrial
Clocks and Timers	www.ti.com/clocks	Medical	www.ti.com/medical
Interface	interface.ti.com	Security	www.ti.com/security
Logic	logic.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Power Mgmt	power.ti.com	Transportation and Automotive	www.ti.com/automotive
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com	Wireless	www.ti.com/wireless-apps
RF/IF and ZigBee® Solutions	www.ti.com/lprf		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2011, Texas Instruments Incorporated

e2e.ti.com

**TI E2E Community Home Page**