SN54ALS762, SN54ALS763, SN54AS762,SN54AS763 SN74ALS762, SN74ALS763, SN74AS762, SNAS763 OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUTS

SDAS067A - DECEMBER 1983 - REVISED MAY 1986

- Package Options include Plastic Small Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- 'ALS762 and 'AS762 Have True and Complementary Outputs
- 'ALS763 and 'AS763 Have Complementary G and G Inputs
- Open-Collector Outputs Drive Bus Lines or Buffer Memory Address Registers
- Eliminates the Need for 3-State Overlap Protection
- Current Sinking Capability Up to 64 mA
- Dependable Texas Instruments Quality and Reliability


description

These octal buffers and line drivers are designed specifically to improve the performance of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters by eliminating the need for 3-state overlap protection. The designer has a choice of selected combinations of inverting and noninverting outputs, symmetrical \overline{G} (active-low output control) inputs, and complementary G and \overline{G} inputs.


The -1 versions of the SN74ALS' parts are identical to their standard versions except that the recommended maximum I_{OL} is increased to 48-mA. There are no -1 versions of the SN54ALS' parts.

The SN54' family is characterized for operation over the full military temperature range of -55°C to 125°C. The SN74' family is characterized for operation from 0°C to 70°C.

SN54ALS', SN54AS' . . . J PACKAGE SN74ALS', SN74AS' . . . DW OR N PACKAGE (TOP VIEW)





SN54ALS', SN54AS' . . . FK PACKAGE (TOP VIEW)



†2G for 'ALS762, 'AS762 and 2G 'ALS763, 'AS763


logic symbols†






[†] These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagrams (positive logic)

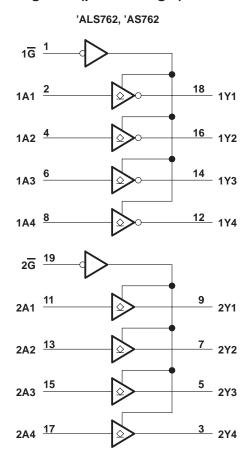

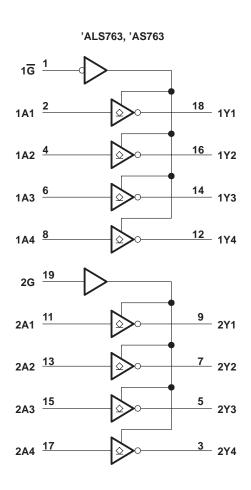

SN54ALS762, SN74ALS762 OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUT

SDAS067A - DECEMBER 1983 - REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V _{CC}		
Input voltage		 7 V
Off-state output voltage		
Operating free-air temperature range:		
	SN74ALS762	 0°C to 70°C
Storage temperature range		 –65°C to 150°C

recommended operating conditions

		SN	54ALS7	62	SN	74ALS7	62	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
VOH	High-level output voltage			5.5			5.5	mA
lai	Low-level output current			12			24	mA
lOL	Low-level output current						48†	IIIA
TA	Operating free-air temperature	-55		125	0		70	°C

[†] The extended limits apply only if VCC is maintained between 4.75 V and 5.25 V. The 48-mA limit applies for the SN74ALS762-1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TECT	CONDITIONS	SN5	4ALS7	62	SN	174ALS7	62	LINUT
PARAMETER	1551	CONDITIONS	MIN	TYP [‡]	MAX	MIN	TYP [‡]	MAX	UNIT
VIK	V _{CC} = 4.5 V,	I _I = –18 mA			-1.2			-1.2	V
IOH	V _{CC} = 4.5 V,	V _{OH} = 5.5 V			0.1			0.1	mA
	V _C C = 4.5 V,	$I_{OL} = 12 \text{ mA}$		0.25	0.4		0.25	0.4	
VOL	V _C C = 4.5 V,	I _{OL} = 24 mA					0.05	0.55	V
	$(I_{OL} = 48 \text{ mA for -1})$	versions)					0.35	0.55	
Ц	V _C C = 5.5 V,	V _I = 7 V			0.1			0.1	mA
lн	V _C C = 5.5 V,	V _I = 2.7 V			20			20	μΑ
I _{IL}	V _{CC} = 5.5 V,	V _I = 0 .4 V			-0.1			-0.1	mA
Icc 'ALS762	V 55V	Outputs high		11			11		A
I _{CC} 'ALS762	V _{CC} = 5.5 V	Outputs low		18			18		mA

 $[\]pm$ All typical values are at V_{CC} = 5 V, T_A = 25°C.

'ALS762 switching characteristics (see Note 1)

· · · · · · · · · · · · · · · · · · ·	•	,				
			V _{CC} = 5.5 V,	V _{CC} = 4.5	V to 5.5 V,	
			C _L = 50 pF,	C _L = 50 p		
242445752	FROM	то	$R_{L} = 680 \ \Omega,$	R _L = 680		
PARAMETER	(INPUT)	(OUTPUT)	T _A = 25°C	T _A = MIN	UNIT	
			'ALS762	SN54ALS762	SN74ALS76	52
			TYP	MIN MAX	MIN MA	·Χ
^t PLH		V	17			
tpHL	А	Y	6			ns
^t PLH	G	V	14			
tpHI	G	Ť	18			ns

[§] The conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. NOTE 1: Load circuit and voltage waveforms are shown in Section 1.



SN54ALS763, SN74ALS763 OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUT

SDAS067A - DECEMBER 1983 - REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V _{CC}			
Input voltage		 	7 V
Off-state output voltage		 	7 V
Operating free-air temperature range:	SN54ALS763	 	-55°C to 125°C
	SN74ALS763	 	0°C to 70°C
Storage temperature range		 	-65°C to 150°C

recommended operating conditions

		SN	54ALS7	63	SN	74ALS7	63	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.7			0.8	V
Vон	High-level output voltage			5.5			5.5	V
lai	Low level output ourrent			12			24	mA
lOL	Low-level output current						48†	IIIA
TA	Operating free-air temperature	-55	•	125	0		70	°C

[†] The extended limits apply only if V_{CC} is maintained between 4.75 V and 5.25 V. The 48-mA limit applies for the SN74ALS763–1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)


DADAMETED	TEST	TEST CONDITIONS		54ALS7	63	SN74ALS763			UNIT
PARAMETER	1531	CONDITIONS	MIN	TYP [‡]	MAX	MIN	TYP [‡]	MAX	UNII
VIK	V _{CC} = 4.5 V,	$I_{I} = -18 \text{ mA}$			-1.2			-1.2	V
ЮН	V _{CC} = 4.5 V,	V _{OH} = 5.5 V			0.1			0.1	mA
	V _{CC} = 4.5 V,	$I_{OL} = 12 \text{ mA}$		0.25	0.4		0.25	0.4	
VOL	$V_{CC} = 4.5 \text{ V},$	$I_{OL} = 24 \text{ mA}$					0.35	0.5	V
	$(I_{OL} = 48 \text{ mA for -1})$	versions)					0.35	0.5	
II	V _{CC} = 5.5 V,	V _I = 7 V			0.1			0.1	mA
lн	V _{CC} = 5.5 V,	V _I = 2.7 V			20			20	μΑ
I _{IL}	$V_{CC} = 5.5 \text{ V},$	V _I = 0.4 V			-0.1			-0.1	mA
1 141 0700	V 55V	Outputs high		7	11		7	11	A
ICC ALS763	V _{CC} = 5.5 V	Outputs low		14	22		14	22	mA

[‡] All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$.

'ALS763 switching characteristics (see Note 1)

	9	,									
			V _{CC} = 5.5 V,	٧c	C = 4.5	V to 5.5	V,				
			C _L = 50 pF,	CL	C _L = 50 pF,						
DADAMETED	FROM	TO $R_L = 680 \Omega$, $R_L = 680 \Omega$		TO $R_L = 680 \Omega$, $R_L = 680$	то	$R_L = 680 Ω$, $R_L = 680 Ω$,		= 680 Ω , $R_L = 680 \Omega$,			
PARAMETER	(INPUT)	(OUTPUT)	T _A = 25°C	TA	UNIT						
			'ALS763	SN54A	LS763	SN74A	LS763				
			TYP	MIN	MAX	MIN	MAX				
^t PLH			16	7	28	7	25				
^t PHL	A	Y	5	2	11	2	9	ns			
t _{PLH}	G		18	8	28	9	25				
^t PHL	G	Y	13	5	25	5	21	ns			
t _{PLH}		V	18	8	28	9	25	20			
tрні	G	Y	13	5	25	5	21	ns			

[§] The conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. NOTE 1: Load circuit and voltage waveforms are shown in Section 1.





SN54AS762, SN54AS763, SN74AS762, SN74AS763 OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUT

SDAS067A - DECEMBER 1983 - REVISED MAY 1986

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V _{CC}	
Input voltage	7 V
Off-state output voltage	
Operating free-air temperature range: SN54AS762, SN54AS763	
SN74AS762, SN74AS763 0°C	C to 70°C
Storage temperature range65°C	to 150°C

recommended operating conditions

			N54AS76 N54AS76		SN74AS762 SN74AS763			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
VCC	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
٧ _{IH}	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8			0.8	V
Vон	High-level output voltage			5.5			5.5	V
loL	Low-level output current			48			64	mA
TA	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS			I54AS76 I54AS76			74AS762 74AS763		UNIT
				MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	
٧ıĸ		$V_{CC} = 4.5 \text{ V},$	$I_{I} = -18 \text{ mA}$			-1.2			-1.2	V
IOH		V _{CC} = 4.5 V,	V _{OH} = 5.5 V			0.1			0.1	mA
\/ a.		$V_{CC} = 4.5 \text{ V},$	$I_{OL} = 48 \text{ mA}$			0.55				V
VOL		$V_{CC} = 4.5 \text{ V},$	$I_{OL} = 64 \text{ mA}$						0.55	V
II		V _{CC} = 5.5 V,	V _I = 7 V			0.1			0.1	mA
lіН		V _{CC} = 5.5 V,	V _O = 2.7 V			20			20	μΑ
Щ	'AS762 2A Inputs only	V _{CC} = 5.5 V,	V _I = 0 .4 V			-1			-1	mA
	All others					-0.5			-0.5	
	'A C760	V F-V	Output high		15	23		15	23	
	'AS762	$V_{CC} = 5.5 V$	Output low		55	87		55	87	A
Icc	'AS763	V	Output high		10	16		10	16	mA
		$S763$ $V_{CC} = 5.5$ V_{CC}	Output low		52	82		52	82	

[†] All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$.



SN54AS762, SN54AS763, SN74AS762, SN74AS763 OCTAL BUFFERS AND LINE DRIVERS WITH OPEN-COLLECTOR OUTPUTS

SDAS067A - DECEMBER 1983 - REVISED MAY 1986

'AS762 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	C _I R _I T _A	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $C_L = 50 \text{ pF},$ $R_L = 500 \Omega,$ $T_A = \text{MIN to MAX}^{\dagger}$ $\hline \text{SN54AS762} \text{SN74AS762}$				
			MIN	MAX	SN74A MIN	MAX		
t _{PLH}			3	20	3	19		
tPHL	1A	1Y	1	7	1	6	ns	
t _{PLH}	0.4	0)/	3	19.5	3	18.5		
t _{PHL}	2A	2Y	1	7	1	6	ns	
^t PLH	G	437	3	22	3	19.5		
t _{PHL}	G	1Y	1	8	1	7.5	ns	
^t PLH	G	27/	3	20	3	19	20	
^t PHL	G	2Y	1	8	1	7	ns	

'AS763 switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CC} = 4.5 V to 5.5 V, C_L = 50 pF, R_L = 500 Ω, T_A = MIN to MAX† SN54AS763 SN74AS763				UNIT
			MIN	MAX	MIN	MAX	-
t _{PLH}	А	Y	3	20	3	19	ns
t _{PHL}			1	7	1	6	
t _{PLH}	G	Υ	3	22	3	19.5	ns
t _{PHL}			1	8.5	1	7.5	
t _{PLH}	G	Υ	3	22	3	20	ns
t _{PHL}			1	8.5	1	8	

[†] The conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. NOTE 1: Load circuit and voltage waveforms are shown in Section 1.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products Amplifiers amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications				
Audio	www.ti.com/audio			
Automotive	www.ti.com/automotive			
Broadband	www.ti.com/broadband			
Digital Control	www.ti.com/digitalcontrol			
Medical	www.ti.com/medical			
Military	www.ti.com/military			
Optical Networking	www.ti.com/opticalnetwork			
Security	www.ti.com/security			
Telephony	www.ti.com/telephony			
Video & Imaging	www.ti.com/video			
Wireless	www.ti.com/wireless			

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated