



TRIACS


- GLASS PASSIVATED CHIP
- HIGH SURGE CURRENT

DESCRIPTION

Low power triacs suited for 50 and 60 Hz up to 380 V_{RMS}.

APPLICATIONS

- CONTROL SPEED FOR LITTLE MOTORS ;
ELECTRIC PUMP OR VENTILATOR, SEWING
MACHINE
- RELAY, DETECTOR, ALARM SYSTEM
- ELECTRONIC STARTER FOR LAMP
- HIGH POWER TRIAC DRIVER

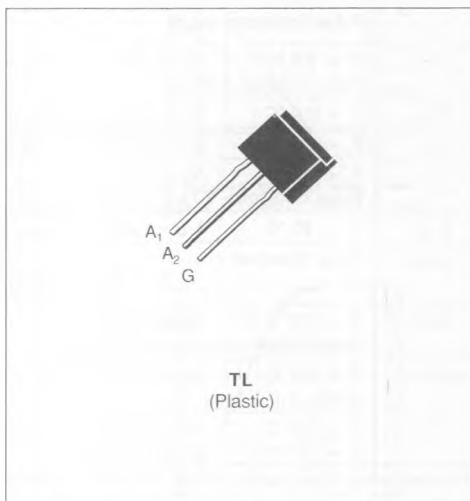

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$I_{T(RMS)}$	RMS on-state Current (360° conduction angle)	$T_J = 40^\circ\text{C}$	1	A
$I_{T(RMS)}$	RMS on-state Current on Printed Circuit (360° conduction angle)	$T_a = 25^\circ\text{C}$	0.77	A
I_{TSM}	Non Repetitive Surge Peak on-state Current (T_J initial = 25°C - Half sine wave)	$t = 8.3\text{ ms}$	16	A
		$t = 10\text{ ms}$	15	
I^2t	I^2t Value for Fusing	$t = 10\text{ ms}$	1.125	A ² s
di/dt	Critical Rate of Rise of on-state Current (1)	Repetitive	10	A/ μs
T_{SJ} T_J	Storage and Operating Junction Temperature Range		- 40 to 150	$^\circ\text{C}$
			- 40 to 110	$^\circ\text{C}$

Symbol	Parameter	TLC111B	TLC221B	TLC331B	TLC381B	Unit
V_{DRM}	Repetitive Peak off-state Voltage (2)	200	400	600	700	V

(1) $I_G = 500\text{ mA}$ di/dt = $1\text{ A}/\mu\text{s}$

(2) $T_J = 110^\circ\text{C}$.

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to Ambient on Printed Circuit	75	$^\circ\text{C}/\text{W}$
$R_{th(j-l)}$	Junction-leads for 360° Conduction Angle ($F = 50\text{ Hz}$)	45	$^\circ\text{C}/\text{W}$

GATE CHARACTERISTICS (maximum values)

$$P_{GM} = 2 W \ (t_p = 10 \ \mu s)$$
$$I_{GM} = 1 \text{ A } (t_p = 10 \mu\text{s})$$
$$P_{G(AV)} = 0.1 \text{ W}$$
$$V_{GM} = 16 \text{ V } (t_p = 10 \mu\text{s})$$


ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions			Quadrants	Min.	Typ.	Max.	Unit
I_{GT}	$T_J = 25\text{ }^{\circ}\text{C}$ Pulse Duration > 20 μs	$V_D = 12\text{ V}$	$R_L = 33\text{ }\Omega$	I-II-III			25	mA
				IV			50	
V_{GT}	$T_J = 25\text{ }^{\circ}\text{C}$ Pulse Duration > 20 μs	$V_D = 12\text{ V}$	$R_L = 33\text{ }\Omega$	I-II-III-IV			1.5	V
V_{GD}	$T_J = 110\text{ }^{\circ}\text{C}$	$V_D = V_{DRM}$	$R_L = 3.3\text{ k}\Omega$	I-II-III-IV	0.2			V
I_{H^*}	$T_J = 25\text{ }^{\circ}\text{C}$	$I_T = 100\text{ mA}$	Gate Open			8		mA
I_L	$T_J = 25\text{ }^{\circ}\text{C}$ Pulse Duration > 20 μs	$V_D = 12\text{ V}$	$I_G = 100\text{ mA}$	I-II-III-IV		8		mA
V_{TM^*}	$T_J = 25\text{ }^{\circ}\text{C}$	$I_{TM} = 1.4\text{ A}$	$t_p = 10\text{ ms}$				1.8	V
I_{DRM^*}	V_{DRM} Specified		$T_J = 25\text{ }^{\circ}\text{C}$				0.01	mA
			$T_J = 110\text{ }^{\circ}\text{C}$				0.75	
dv/dt^*	$T_J = 110\text{ }^{\circ}\text{C}$ Linear Slope up to $V_D = 67\% V_{DRM}$	Gate Open			20			V/ μs
$(dv/dt)_c^*$	$T_J = 40\text{ }^{\circ}\text{C}$ $(di/dt)_c = 0.4\text{ A/ms}$	$V_D = V_{DRM}$	$I_T = 1.4\text{ A}$		5			V/ μs
t_{gt}	$T_J = 25\text{ }^{\circ}\text{C}$ $I_G = 100\text{ mA}$	$V_D = V_{DRM}$ $di_G/dt = 1\text{ A}/\mu\text{s}$	$I_T = 1.4\text{ A}$	I-II-III-IV		3		μs

* For either polarity of electrode A₂ voltage with reference to electrode A₁.

PACKAGE MECHANICAL DATA

TL Plastic

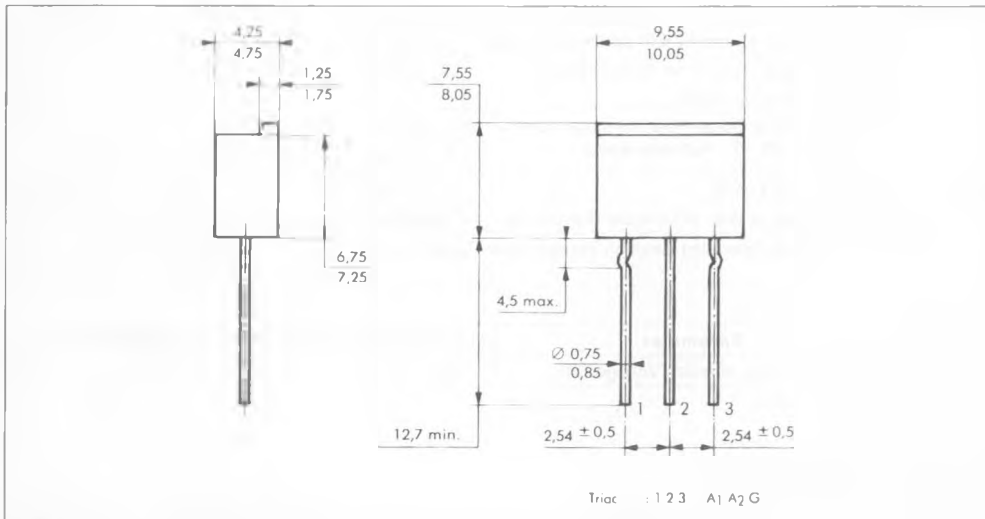

Cooling method : by convection (method A)

Marking : type number

Weight : 0.8 g.

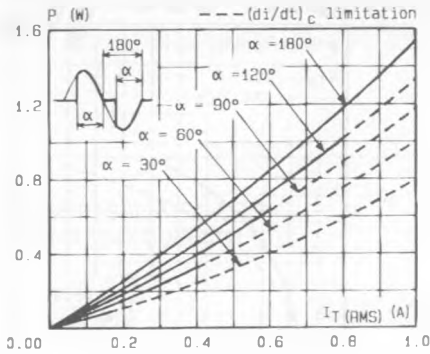


Fig.1 - Maximum mean power dissipation versus RMS on-state current.

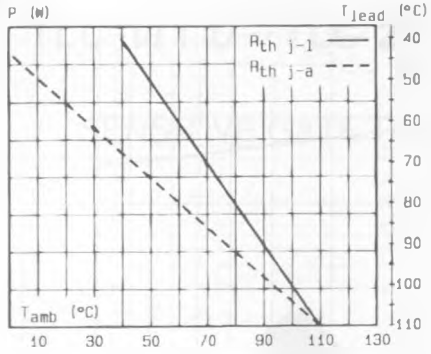


Fig.2 - Correlation between maximum mean power dissipation and maximum allowable temperatures (T_{amb} and T_{lead}).

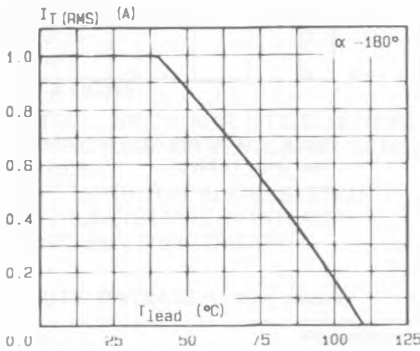


Fig.3 - RMS on-state current versus lead temperature.

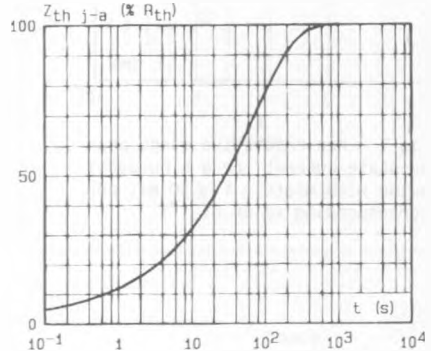


Fig.4 - Thermal transient impedance junction to ambient versus pulse duration.

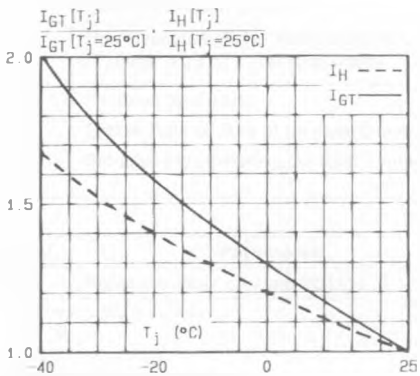


Fig.5 - Relative variation of gate trigger current and holding current versus junction temperature.

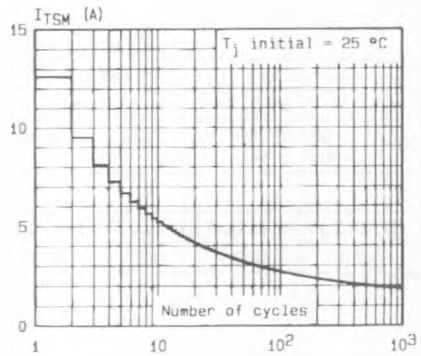


Fig.6 - Non repetitive surge peak on-state current versus number of cycles.

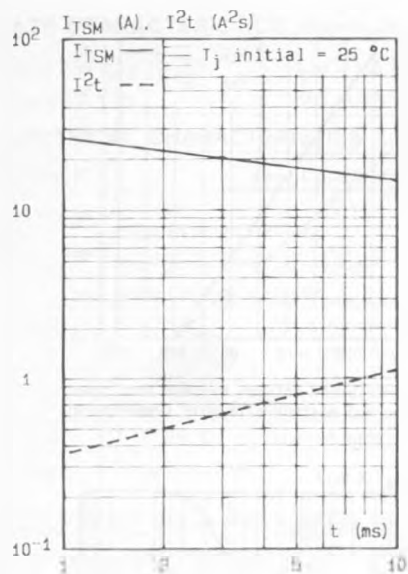


Fig.7 - Non repetitive surge peak on state current for a sinusoidal pulse with width : $t \leq 10$ ms, and corresponding value of I^2t .

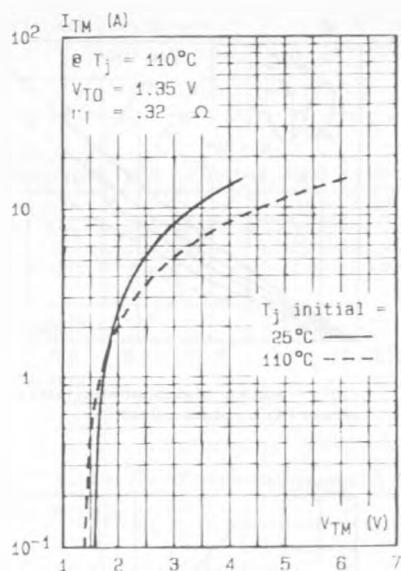


Fig.8 - On-state characteristics (maximum values).